




US Army Corps  
of Engineers®  
Engineer Research and  
Development Center

*under final peer review for publication*

## **North Atlantic Coast Comprehensive Study (NACCS) Coastal Storm Model Simulations: Waves and Water Levels**

Mary A. Cialone, T. Chris Massey, Mary E. Anderson, Alison S. Grzegorzewski, Robert E. Jensen, Alan Cialone, David J. Mark, Kimberly C. Pevey, Brittany L. Gunkel, Tate O. McAlpin, Norberto N. Nadal-Caraballo, Jeffrey A. Melby, and Jay J. Ratcliff

January 2015

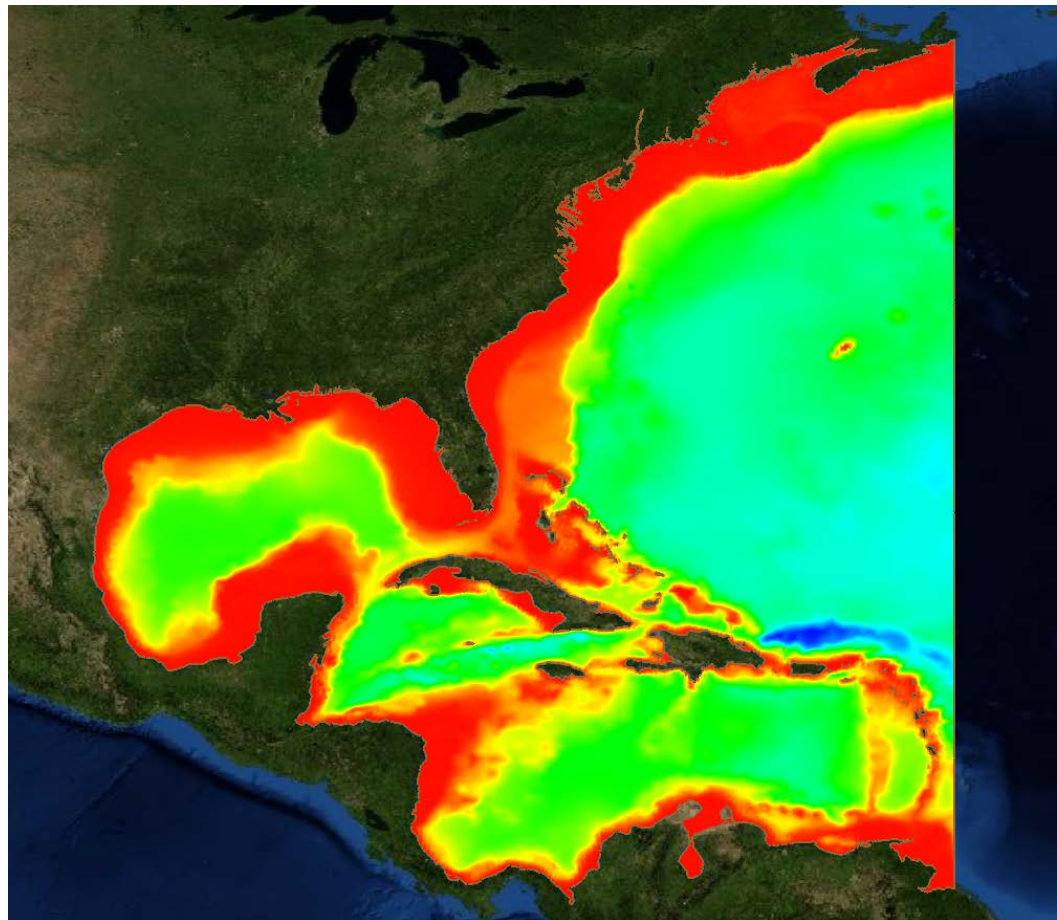

# **North Atlantic Coast Comprehensive Study (NACCS) Coastal Storm Model Simulations: Waves and Water Levels**

Mary A. Cialone, T. Chris Massey, Mary E. Anderson, Alison S. Grzegorzewski, Robert E. Jensen, Alan Cialone, David J. Mark, Kimberly C. Pevey, Brittany L. Gunkel, Tate O. McAlpin, Norberto N. Nadal-Caraballo, Jeffrey A. Melby, and Jay J. Ratcliff

Final report

Approved for public release; distribution is unlimited. <or a restricted statement if applicable>

Prepared for U.S. Army Corps of Engineers  
Washington, DC 20314-1000

Monitored by Coastal and Hydraulics Laboratory  
U.S. Army Engineer Research and Development Center  
3909 Halls Ferry Road, Vicksburg, MS 39180-6199

**Abstract:** [Insert a 200-word summary here and use exactly the same one in Block 14 of the SF 298.]

**DISCLAIMER:** The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products. All product names and trademarks cited are the property of their respective owners. The findings of this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

**DESTROY THIS REPORT WHEN NO LONGER NEEDED. DO NOT RETURN IT TO THE ORIGINATOR.**

# Table of Contents

<b>List of Figures and Tables.....</b>	<b>vi</b>
<b>Preface.....</b>	<b>xiii</b>
<b>Unit Conversion Factors .....</b>	<b>xiv</b>
<b>1 Introduction.....</b>	<b>1</b>
<b>2 Storm Selection .....</b>	<b>5</b>
2.1 Introduction.....	5
2.2 Storm Selection Process for Extratropical Cyclones .....	5
2.3 Storm Selection Process for Tropical Cyclones .....	6
<b>3 Coastal Storm Modeling System (CSTORM-MS) .....</b>	<b>10</b>
3.1 Introduction.....	10
<b>4 Wind and Pressure Field Generation .....</b>	<b>12</b>
4.1 Historical Extratropical Storms Wind and Pressure Fields .....	12
4.2 Synthetic Tropical Storm Development .....	13
<b>5 Offshore Wave Generation .....</b>	<b>17</b>
5.1 Introduction.....	17
5.2 Wave Model Selection.....	21
5.3 WAM Grid Development.....	22
5.4 WAM Model Evaluation .....	24
5.5 Model Sensitivity to Simulation Length.....	33
5.6 Summary of Model Evaluation and Testing .....	39
5.7 WAM Production 100 Extratropical Storm Events .....	46
5.8 WAM Production 1050 Synthetic-Tropical Storm Events.....	58
5.9 Summary.....	68
<b>6 ADCIRC Modeling .....</b>	<b>72</b>
6.1 Model Description .....	72
6.2 Mesh Development .....	74
6.2.1 General .....	74
6.2.2 Details.....	75
6.3 Bathymetric and Topographic Data Sources.....	76
6.3.1 Bathymetry .....	77
6.3.2 Topography.....	77
6.3.3 ERDC LIDAR.....	78
6.3.4 USGS LIDAR.....	80
6.4 Forcing Conditions.....	83
6.4.1 Tidal Forcing.....	84

6.4.2	River Inflows .....	84
6.4.3	Wind Forcing.....	87
6.4.4	Steric Adjustment and Sea Level Change .....	88
6.5	Nodal Attributes .....	90
6.5.1	Manning's <i>n</i> Bottom Friction Coefficient.....	91
6.5.2	Lateral Eddy Viscosity.....	91
6.5.3	Primitive Weighting Coefficient .....	91
6.5.4	Canopy coefficient.....	91
6.5.5	Directional Wind Reduction .....	92
6.6	High Frequency Save Point Locations for Model Output .....	92
6.7	Model Validation .....	97
6.7.1	General Considerations .....	97
6.7.2	Harmonic Analysis .....	98
6.7.3	Model Validation .....	104
6.7.4	IMEDS .....	118
6.7.5	High Water Marks Comparisons.....	121
6.8	Summary.....	122
<b>7</b>	<b>Nearshore Wave Modeling.....</b>	<b>124</b>
7.1	Introduction.....	124
7.2	STWAVE Version 6.2.24.....	124
7.2.1	Model description .....	125
7.3	Model Setup.....	126
7.3.1	Grid Development .....	126
7.3.2	Offshore boundary spectra.....	128
7.3.3	High-frequency save points .....	135
7.4	Model parameters .....	135
7.4.1	Half-plane versus full-plane.....	135
7.4.2	Model execution.....	136
7.5	STWAVE validation .....	137
7.5.1	QA/QC.....	137
7.5.2	Model evaluation.....	139
7.6	Summary.....	150
<b>8</b>	<b>CSTORM-MS Production.....</b>	<b>151</b>
8.1	Coupling Overview .....	151
8.2	CSTORM Production System .....	155
8.2.1	Semi-Automated Scripting for CSTORM-MS Production Simulations .....	155
8.3	Model Coupling Timing.....	159
8.3.1	Run parameter table.....	159
8.3.2	Specific information for the historical extratropical storms run parameters .....	160
8.4	CSTORM-PS Data Organization and Description.....	161
8.5	Storm Speed and Evaluation Frequency .....	163
8.6	CSTORM Production Visualization .....	165
8.6.1	CSTORM-PVz Pre-Configuration Setup.....	167
8.6.2	CSTORM-PVz Script Initiation and Creation .....	168

8.6.3	<i>CSTORM-PVz Script Execution Workflow and Parallelization .....</i>	<i>171</i>
8.6.4	<i>CSTORM-PVz Reports and Tar Files Creation .....</i>	<i>172</i>
8.6.5	<i>CSTORM-PVz QA/QC Data and Reports .....</i>	<i>172</i>
8.7	CSTORM-MS Base Simulations .....	174
8.8	CSTORM-MS with Tides Simulations .....	175
8.9	CSTORM-MS with Tides and Sea Level Change Simulations .....	176
8.10	Summary .....	177
<b>9</b>	<b>References .....</b>	<b>182</b>
	<b>Appendix A: NACCS Historical Extratropical Cyclones.....</b>	<b>188</b>
	<b>Appendix B: Synthetic Tropical Cyclone Master Tracks.....</b>	<b>192</b>
	<b>Appendix C: NACCS Synthetic Tropical Cyclones.....</b>	<b>196</b>
	<b>Appendix D: mf_config.in Details .....</b>	<b>222</b>
	<b>Appendix E: “Tar Ball” Details .....</b>	<b>225</b>
	<b>Appendix F: Model and CSTORM File Descriptions.....</b>	<b>227</b>
	<b>Appendix G: CSTORM-Pvz Options .....</b>	<b>231</b>
	<b>Report Documentation Page</b>	

# List of Figures and Tables

## Figures

Figure 2-1. Three regions identified for selecting storms. ....	7
Figure 2-2. Example of along-track variations for landfalling tropical cyclones. ....	9
Figure 3-1. Schematic of CSTORM-MS workflow.....	11
Figure 4-1. WIS Level II and NACCS wind and pressure domains.....	13
Figure 4-2. Wind field snapshot for Storm 1050 for the NACCS domain. ....	15
Figure 4-3. Pressure field snapshot for Storm 1050 for the NACCS domain. ....	16
Figure 5-1. Offshore wave model Regional and Sub-region domains, and NOAA National Data Buoy Center sites used for extreme wave storm analysis.....	18
Figure 5-2. Maximum wave height envelope during SuperStorm Sandy 26-day simulation, where five tropical systems were evident in the Level 1 Atlantic Ocean domain. ....	20
Figure 5-3. Maximum wave height envelope during Halloween Nor 'Easter (ET0058-8) 8-day simulation, where three tropical systems were evident in the Level 1 Atlantic Ocean domain. ....	20
Figure 5-4. WAM multi-level grid system used in NACCS. Note Level 1 covers the entire domain illustrated.....	23
Figure 5-5. WAM multi-level grid system used in NACCS. Note Level 2 covers the entire domain illustrated.....	24
Figure 5-6. Five tropical storm tracks used in evaluation tests. Level3N and Level3C domains are identified by the black boxes, black dot represents hurricane intensities of Cat-1 and higher.....	26
Figure 5-7. STWAVE boundary condition save points (open circles), buoy sites (solid points). Initialization analyses use both STWAVE boundary points and measurement sites.....	29
Figure 5-8. Evaluation of WAM Level3N, northern region results for five wave measurement locations.....	30
Figure 5-9. Evaluation of WAM Level3N, Long Island region results for five wave measurement locations.....	31
Figure 5-10. Evaluation of WAM results at NDBC 44099, the significant wave height, parabolic fit wave period, the mean wave period, and the vector mean wave direction.....	32

<b>Figure 5-11. Time plot envelope of 165 special output locations for 20-day pad, Storm of the Century. ....</b>	<b>34</b>
<b>Figure 5-12. Time plot envelope of 165 special output locations for 10-day pad, Storm of the Century. ....</b>	<b>35</b>
<b>Figure 5-13. Time plot envelope of 165 special output locations for 05-day pad, Storm of the Century. ....</b>	<b>35</b>
<b>Figure 5-14. Scatter plot of time paired results of 165 special output locations compared to base-line (30-day pad), Storm of the Century.....</b>	<b>36</b>
<b>Figure 5-15. Time plot envelope of 165 special output locations for 20-day pad SuperStorm Sandy. ....</b>	<b>37</b>
<b>Figure 5-16. Time plot envelope of 165 special output locations for 10-day pad SuperStorm Sandy. ....</b>	<b>37</b>
<b>Figure 5-17. Time plot envelope of 165 special output locations for 05-day pad Hurricane Sandy. ....</b>	<b>38</b>
<b>Figure 5-18. Scatter plot of time paired results of 165 special output locations compared to base-line (30-day pad), Hurricane Sandy.....</b>	<b>38</b>
<b>Figure 5-19. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level2 results derived from the extra- and tropical storm set. ....</b>	<b>41</b>
<b>Figure 5-20. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level3N results derived from the extra- and tropical storm set. ....</b>	<b>43</b>
<b>Figure 5-21. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level3C results derived from the extra- and tropical storm set. ....</b>	<b>44</b>
<b>Figure 5-22. WAM multi-level grid system used in NACCS Production. Note Level 2 covers the entire domain illustrated, (compared to Figure 5-5 displaying evaluation test grid systems).....</b>	<b>47</b>
<b>Figure 5-23. Maximum wind speed and <math>H_{m0}</math> estimates for 100 extratropical historical storm simulations. Decades are indicated by the red vertical lines.....</b>	<b>50</b>
<b>Figure 5-24. Location of wind speed and significant wave height maxima derived from the 100 extreme extratropical simulations.....</b>	<b>52</b>
<b>Figure 5-25. Number of point-source measurement sites available during the production of the 100 extreme extratropical storm events. Decades are indicated by the red vertical lines.....</b>	<b>53</b>
<b>Figure 5-26. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level2 results derived from the 100 extreme extratropical storm events. ....</b>	<b>54</b>

Figure 5-27. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level3N results derived from the 100 extreme extratropical storm events. ....	55
Figure 5-28. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level3c results derived from the 100 extreme extratropical storm events. ....	57
Figure 5-29. Overall maximum wind speed (top panel) and maximum significant wave height (bottom panel) estimates for each of the 1050 synthetic tropical storm simulations for the NACCS.....	61
Figure 5-30. Maximum wind speed and significant wave height locations in Level2 model domain for the 1050 synthetic tropical storm event simulations. ....	65
Figure 5-31. Maximum wind speed and significant wave height locations in Level3N and Level3C model domains for the 1050 synthetic tropical storm event simulations.....	67
Figure 6-1. ADCIRC mesh domain boundary (shown in red).....	74
Figure 6-2. ADCIRC mesh for NACCS.....	76
Figure 6-12. Mean and 95% confidence band steric adjustment of mean sea level for Station #8534720 Atlantic City, NJ.....	89
Figure 6-13. Mean and 95% confidence band steric adjustment of mean sea level for Station #8638863 Chesapeake Bay Bridge Tunnel, VA. ....	89
Figure 6-14. NAP save point locations at 7 inlets in New Jersey; the ADCIRC mesh resolution for these inlets ranges from 70-200 meters.....	93
Figure 6-15. High-frequency save points, shown as black dots, in Maine and New Hampshire. ....	94
Figure 6-16. High-frequency save points, shown as black dots, in Massachusetts and Rhode Island. ....	95
Figure 6-17. High-frequency save points, shown as black dots, in Connecticut and New York. ....	95
Figure 6-18. High-frequency save points, shown as black dots, in New Jersey. ....	96
Figure 6-19. High-frequency save points, shown as black dots, in Delaware and Maryland. ....	96
Figure 6-20. High-frequency save points, shown as black dots, in Virginia.....	97
Figure 6-21. Tidal harmonic analysis for Portland, Maine gage top) before and bottom) after Gulf of Maine bathymetric correction.....	99
Figure 6-22. Tidal harmonic analysis for Thomaston, Maine.....	100
Figure 6-23. Tidal harmonic analysis for The Battery, New York.....	101

Figure 6-24. Tidal harmonic analysis for Atlantic City, NJ. ....	102
Figure 6-25. Tidal harmonic analysis for Lewes, Delaware.....	103
Figure 6-26. Tidal harmonic analysis for the US Coast Guard Station, Hatteras, NC. ....	104
Figure 6-27. Fine resolution wind domains for validation storms and NACCS.....	105
Figure 6-28. Paths of tropical validation storms. ....	107
Figure 6-29. NOAA station locations. ....	108
Figure 6-30. Hurricane Gloria time series comparison at Atlantic City, New Jersey.....	108
Figure 6-31. Hurricane Josephine time series comparison at Lewes, Delaware.....	110
Figure 6-32. Hurricane Isabel time series comparison at Duck, North Carolina.....	111
Figure 6-33. Hurricane Irene time series comparison at Chesapeake Bay Bridge Tunnel, Virginia. ....	113
Figure 6-36. ET070 time series comparison at Lewes, Delaware. ....	117
Figure 6-37. ET073 time series comparison at Willets Point, New York. ....	118
Figure 6-38. Hurricane Sandy IMEDS scores for the northern portion of the study area. ....	120
Figure 6-39. Hurricane Sandy IMEDS scores for the southern portion of the study area.....	120
Figure 6-40. Differences between modeled and measured water levels of less than 0.5 m.....	121
Figure 6-41. Differences between modeled and measured water levels of more than 0.5 m.....	122
Figure 7-1. STWAVE grid domains.....	127
Figure 7-2. WAM offshore spectra locations and bathymetry of NME. ....	130
Figure 7-3. WAM offshore spectra locations and bathymetry of CME. ....	131
Figure 7-4. WAM offshore spectra locations and bathymetry of SME.....	131
Figure 7-5. WAM offshore spectra locations and bathymetry of EMA. ....	132
Figure 7-6. WAM offshore spectra locations and bathymetry of SMA. ....	132
Figure 7-7. WAM offshore spectra locations and bathymetry of LID. ....	133
Figure 7-8 WAM offshore spectra locations and bathymetry of NNJ. ....	133
Figure 7-9. WAM offshore spectra locations and bathymetry of CNJ. ....	134
Figure 7-10. WAM offshore spectra locations and bathymetry of CPB.....	134

Figure 7-11. Bathymetry of WDC. No spectral points are shown since waves were locally generated within the domain. ....	135
Figure 7-12. Maximum significant wave height color contour of LID grid for Sandy.....	138
Figure 7-13. Location of identified buoys. ....	139
Figure 7-14. Time plot of model results versus measurements at 44013 for Sandy.....	140
Figure 7-15. Taylor diagram for ET070. ....	141
Figure 7-16. Taylor diagram for ET073. ....	141
Figure 7-17. Scatter plots of validation extratropical storms. ....	142
Figure 7-18. Taylor diagram for Gloria. ....	143
Figure 7-19. Taylor diagram for Josephine.....	143
Figure 7-20. Taylor diagram for Isabel.....	144
Figure 7-21. Taylor diagram for Irene. ....	145
Figure 7-22. Taylor diagram for Sandy.....	145
Figure 7-23. Scatter plots of validation tropical storms. ....	146
Figure 7-24. Color contour of time paired significant wave heights for all validation storms.....	149
Figure 7-25. Color contour of time paired mean wave period for all validation storms. ....	149
Figure 8-1. A schematic showing the major components of the CSTORM-MS coupling paradigm and the flow of information. ....	152
Figure 8-2. A workflow schematic showing the order of operation between ADCIRC and STWAVE within the CSTORM-MS coupling framework. Red and blue alternating patterns are used for visual effects only to show separation of individual run periods. ....	152
Figure 8-3. Schematic showing the sequence of operations performed during the CSTORM-PS process. ....	158
Figure 8-4. A schematic description of the general directory structure for simulation classifications.....	162
Figure 8-5. Distribution of synthetic tropical storms by their forward speed.....	164
Figure 8-6. Grouping of synthetic tropical storms into three forward speed categories and the number of storms in each category. ....	164
Figure 8-7. Synthetic tropical storm number 2's track (a land-falling storm) and indicators for ADCIRC only (blue) computations and ADCIRC+STWAVE (red) computations along the track.....	165

Figure 8-8. The track for synthetic tropical storm number 990 (a by-passing storm for Region 1) and indicators for ADCIRC only (blue) computations and ADCIRC+STWAVE (red) computations along the track.....	166
Figure 8-10. Chesapeake Bay region ADCIRC peak surge contour plot for synthetic tropical storm number 180.....	169
Figure 8-11. Chesapeake Bay STWAVE significant wave heights contour plot for synthetic tropical storm number 180.....	170
Figure 8-12. Chesapeake Bay STWAVE peak wave periods contour plot for synthetic tropical storm number 180.....	170
Figure 8-13. STWAVE peak wave heights combined overview contour plot for synthetic tropical storm number 180.....	172
Figure 8-15. Example STWAVE QA/QC diagnostics and information.....	174

## Tables

Table 2-1. Discrete values of synthetic tropical cyclone parameter marginal distributions. ....	7
Table 5-1. Model grid information evaluation testing. ....	24
Table 5-2. Baseline extreme storm events. ....	25
Table 5-3. Evaluation testing extratropical extreme wave events.....	27
Table 5-4. Number of point source measurement sites model evaluation testing.....	39
Table 5-5. Model grid information production.....	47
Table 5-6. Wind speed / $H_{m0}$ maxima locations. ....	68
Table 6-1. River flow rates determined from analyzing 100 historical tropical events. ....	86
Table 6-2. Save points. ....	94
Table 6-3. Coupled ADCIRC validation IMEDS scores.....	121
Table 7-1. STWAVE grid geometries.....	128
Table 7-2. Latitude and longitude of offshore boundary spectra for grids in UTM Zone 19. ....	129
Table 7-3. Latitude and longitude of offshore boundary spectra for grids in UTM Zone 18. ....	129
Table 7-4. Full-plane runtime parameters.....	137
Table 7-5. Unconverged time steps for validation storms. ....	138

---

Table 7-6. Summary statistics for validation storm significant wave height.....	147
Table 7-7. Summary statistics for validation mean wave period.....	148
Table 7-8. Statistical summary of STWAVE's overall performance.....	150
Table 8-1. Excerpt from the run parameters table for historical extratropical storms 29-35. ....	159
Table 8-2. A listing of the simulation characteristics and their description used in constructing a unix prefix name for simulation results. ....	161

## Preface

This study was conducted for the North Atlantic Division under Project Number xxxxx, “North Atlantic Coast Comprehensive Study.” The technical monitor for the modelling and statistical analysis was Ms. Lynn M. Bocamazo.

The work was performed by the Coastal Processes (HF-C), Harbors, Entrances, and Structures (HNC), Estuarine Engineering (HFE), and Coastal Engineering (HNC) Branches of the Navigation (HN) and Flood and Storm Protection (HF) Divisions, U.S. Army Engineer Research and Development Center – Coastal and Hydraulics Laboratory (ERDC-CHL). At the time of publication, Mr. Mark Gravens, Mr. James Gutshall, Dr. Robert McAdory, and Ms. Tanya Beck were Branch Chiefs; Dr. Ty Wamsley and Dr. Jackie Pettway were Division Chiefs; and Mr. William Curtis was the Technical Director for Flood and Coastal. The Deputy Director of ERDC-CHL was Dr. Kevin Barry and the Director was Mr. Jose Sanchez.

COL Jeffrey Eckstein was the Commander and Executive Director of ERDC, and Dr. Jeffery P. Holland was the Director.

## Unit Conversion Factors

Multiply	By	To Obtain
feet	0.3048	meters
miles per hour	0.44704	meters per second

# 1 Introduction

The goal of the North Atlantic Coast Comprehensive Study (NACCS) modeling effort was to ultimately compute the joint probability of coastal storm forcing parameters for the North Atlantic Coast of the United States as this information is essential for effective flood risk management project planning, design and performance evaluation. The main focus was on storm winds, waves and water levels along the coast for both tropical and extratropical storm events. The area of interest was coastal watersheds in the Mid- to North-Atlantic region, from Maine to Virginia. Coastal communities in these areas are vulnerable to storm-induced flood damage. Flood and wind damage from coastal storms continues to cause dramatic negative impacts to the national economy with combined direct costs of over \$400 billion for the top seven most damaging hurricanes. Six of these seven storms have occurred since 2004. Hurricane Sandy alone accounted for roughly \$66 billion in damages and over 200 deaths. With more than 52% of the U.S. population living in coastal watershed counties and the coastal population expected to increase 10% by 2020, the *potential* for damages from future storms is expected to increase as a result of the rise in population density and the accompanying added infrastructure. Potential changes in sea level and storm frequency may or may not exacerbate the vulnerability of these coastal communities, depending on future climate conditions.

This study employed the most current atmospheric, wave and storm surge modeling and extremal statistical analysis techniques. The study was performed using the high-fidelity models within the Coastal Storm Modeling System (CSTORM-MS), the Joint Probability Method with Optimum Sampling (JPM-OS) and traditional joint probability techniques applied recently in FEMA Risk MAP (FEMA, 2012) and USACE studies (IPET, 2009). The North Atlantic Coast Comprehensive Study (NACCS) study produced nearshore wind, wave and water level estimates and the associated marginal and joint probabilities. This study did not include engineering calculations, such as wave runup, nearshore morphology change, sediment transport, and probabilistic analysis of riverine stage or overland flooding.

For the joint probability of coastal storm forcing, the standard-of-practice is to develop a joint probability of nearshore waves, water levels, winds, overland flooding, river flow and any other parameters of interest. For recent similar USACE and FEMA studies, planetary boundary layer numerical models are used to generate wind and pressure fields that are then used to drive high-fidelity storm surge and wave hydrodynamic models. Waves and water levels are modeled to the nearshore area. This is done for historical storm events and/or synthetic events to define a robust statistical population of project storm forcing. The details vary for each of the recent regional studies completed by FEMA and the USACE, but generally follow the approach outlined herein. The regional studies conducted for hurricane-prone areas have utilized ERDC-CHL-developed hydrodynamic and statistical techniques and numerical models. This study also exercised these proven strategies.

Prior storm characterization work along the eastern seaboard of the U.S. is extensive. Storm surge was modeled and resulting stage-frequency relations were generated for the Fire Island to Montauk Point, NY area as part of the Fire Island to Montauk Point, NY (FIMP) study (Irish et al. 2005). The study was conducted with the pre-hurricane-Katrina wave and storm surge numerical models as well as pre-Katrina statistical methods. The modeling methods have since been greatly improved. The statistical approaches for estimating the joint probability of coastal storm response, such as surge and waves, have also been greatly improved within USACE studies as well as FEMA Risk MAP studies. Present approaches include the Joint Probability Method with Optimum Sampling (JPM-OS) technique for hurricanes and more traditional joint probability techniques for extratropical storms. FEMA Region II and III are currently updating base flood elevation maps as part of the Risk MAP program. That FEMA work has direct parallels to the NACCS study. FEMA has performed a JPM-OS-based analysis of tropical storm surge hazard and an EST-based analysis of extratropical storm surge hazard. They have applied both a highly detailed and geographical extensive ADCIRC mesh and the corresponding parameter estimation information for that area. The ADCIRC model for the FEMA study was validated for a series of historical storms, both tropical and extratropical for those regions (II and III). Because of these extensive, recent studies by FEMA, the modeling grids, bathymetry, and joint probability models available from the FEMA II and III studies were used as a starting point for the central and southern portions of this study and will be described in the grid development section of this report. The northern

portion of this study reach (Maine to New York) is part of FEMA Region I where another methodology was applied and therefore no JPM-OS-based analysis exists for this region. FEMA Region I therefore required more development from storm selection, forcing conditions, and grid development.

Historical water level and meteorological measurements extend back approximately 100 years along the area of interest. Also, relatively long-term wave measurements extend back into the 1970's while continuous wave and wind hindcasts extend back to 1954. As such, there are considerable supporting data already available that were used to develop comprehensive and accurate joint probability models of coastal storm response. This "Joint Probability Study of Coastal Storm Forcing Parameters" will compute the coastal storm hazard for the east coast region from Maine to Virginia. The primary focus is on storm winds, waves and water levels along the coast for both tropical and extratropical storm events. Winds, waves and water levels are computed by applying a suite of high-fidelity numerical models within CSTORM-MS. Products from this work include simulated winds, waves and water levels for 1050 synthetic tropical events and 100 extratropical events computed at over three million computational locations. A smaller number of save points (18,000) will archive the same information at higher frequency for more convenient/concise data handling. The simulated storm events are determined to span the range of practical storm probabilities. The water levels are modeled in such a way that the effects of storm surge, waves, tide, and sea level change can be assessed.

The products of this work are intended to close gaps in data required for flood risk management analyses by providing statistical wave and water level information for the entire North Atlantic coast, while providing cost savings compared to developing coastal storm hazard data for individual local projects. The statistical database can potentially be revised based on estimates of future climatology. The CSTORM-MS platform provides the raw model data (winds, waves, and water levels) as well as processed data (visualization products and statistics) and is available through the internet-based Coastal Hazards System. These data are available for engineering analyses and project design for coastal projects from Maine to Virginia.

This report documents the storm selection process, development of wind and pressure fields, model development and validation, production system development, and modeling of production storms.

## **2 Storm Selection**

### **2.1 Introduction**

This chapter provides a summary of the detailed storm selection description contained in Nadal-Caraballo et al. (2015). The NACCS coastal region is primarily affected by tropical, extratropical, and transitional storms. It is common to group the storms into statistical families of tropical and extratropical with transitional storms that were once tropical being mostly categorized as tropical. For the NACCS, both tropical and extratropical storms were strategically selected to characterize the regional storm hazard. Extratropical storms were selected using the method of Nadal-Caraballo and Melby (2014) with an observation screening process. The result was an efficient sample of historical extratropical storms that were then simulated using climate and hydrodynamic numerical models as described in Chapters 4 through 7. The tropical storm suite was developed using a modified version of the joint probability method (JPM) methodology (Ho and Myers 1975) with optimized sampling (JPM-OS) methods from Resio et al. (2007) and Toro et al. (2010). In this process, synthetic tropical storms are defined from a joint probability model of tropical cyclone parameters. The cyclone parameters describe the storm size, intensity, location, speed, and direction. These storms are also simulated using climate and hydrodynamic models. This approach to statistical sampling is specifically designed to produce coastal hydrodynamic responses that efficiently span practical parameter and probability spaces specific to the study area.

### **2.2 Storm Selection Process for Extratropical Cyclones**

The screening and sampling of extratropical cyclones was limited to screening from water level and meteorological observations. As part of this process, the storm surge response (non-tidal residual) was estimated as the difference between the verified observed water level and the astronomical tide. Approximately 40 NOAA water level stations were initially identified but ultimately 23 stations were retained based on the criterion of having at least 30 years of verified hourly measurements. The preliminary screening of the 23 NOAA stations resulted in the sampling of approximately 250 extratropical storms for the entire NACCS region. This number was reduced to an optimal amount using the Composite Storm Set (CSS)

method (Nadal-Caraballo et al. 2012). Employing this approach, storms were screened and sampled using the peaks-over-threshold (POT) technique from the 23 NOAA gages, and the highest ranked storms (largest water level values) among all stations were retained to constitute the CSS. The storms list from screening water level observations was cross-checked with atmospheric observations to further identify storms.

Based on sensitivity analyses, it was determined that a CSS of 100 storms is adequate to capture the extratropical cyclones response statistics in the NACCS region. So, as a result of the CSS method, the number of sampled storms was reduced to an optimal set of 100 historical extratropical cyclones. These storms are listed in Appendix A: NACCS Historical Extratropical Cyclones.

## 2.3 Storm Selection Process for Tropical Cyclones

Storm selection for tropical storms, or transitional storms that were previously tropical, began by assembling historical data from authoritative sources, such as the HURDAT2 database distributed by NOAA. Although the entire HURDAT2 data set dating from 1851 to 2012 was used to discern parameter ranges, the data used for the quantitative analysis corresponded to the period 1938 – 2012, roughly corresponding to the period of modern aircraft reconnaissance missions. Tropical cyclone parameters for storms that impacted the region from Virginia to Maine were collected. The primary parameters considered were:

- landfall or reference location,  $x_0$
- heading direction,  $\theta$
- central pressure deficit,  $\Delta p$
- radius of maximum winds, RMW
- forward speed,  $V_f$ .

These storm parameters were required as inputs to the planetary boundary layer (PBL) model used for the generation of wind and pressure fields that were consequently used to force the hydrodynamic models. Storms were segregated into three spatial regions, primarily by latitude, and by landfalling and bypassing criterion (Figure 2-1). Storm parameter marginal distributions from the above list of parameters were developed and discretized and combined into regional joint probability models. The joint probability model was a critical component. Storms were synthesized from the discrete probability models.

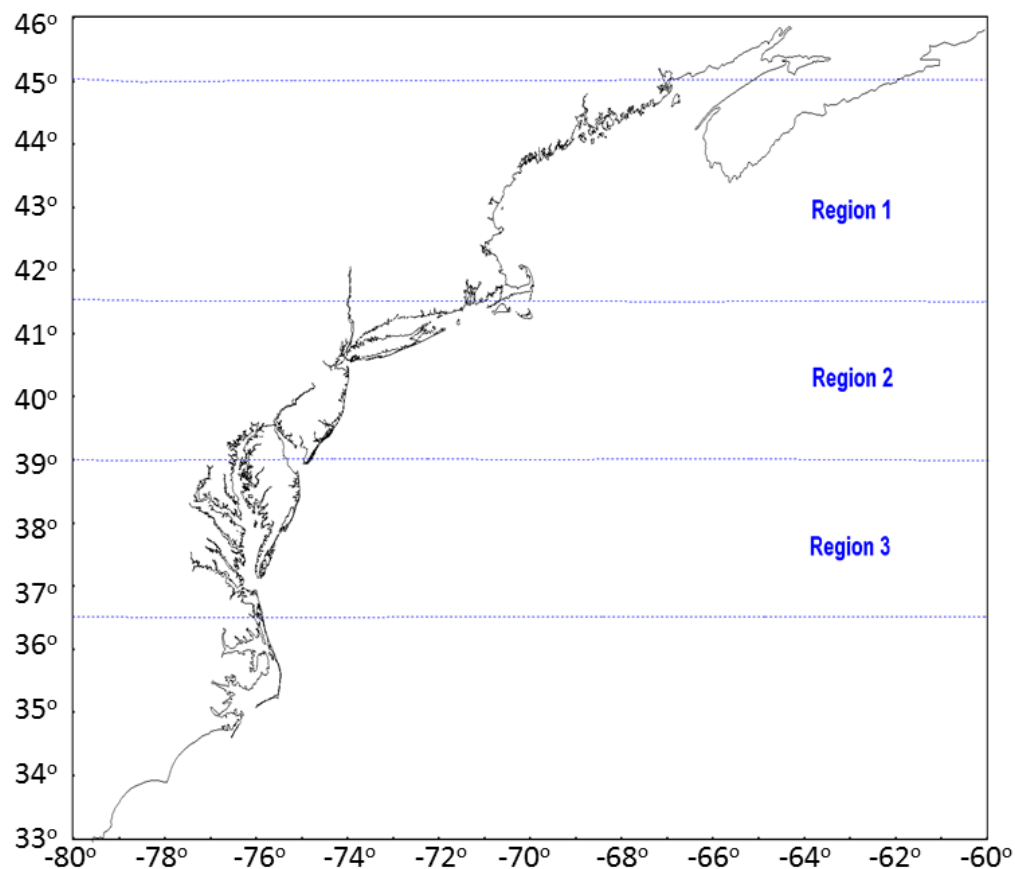


Figure 2-1. Three regions identified for selecting storms.

The product of the probability model discretization is a suite of storm parameter combinations listed in Table 2-1. The parameter ranges exceed the historical record but reasonably represent extreme potential storms.

Table 2-1. Discrete values of synthetic tropical cyclone parameter marginal distributions.

Tropical Cyclone Parameters	NACCS Subregion 3	NACCS Subregion 2	NACCS Subregion 1
Heading direction	-60°, -40°, -20°, 0°, +20°, +40°	-60°, -40°, -20°, 0°, +20°, +40°	-60°, -40°, -20°, 0°, +20°, +40°
Central pressure deficit	From 28 to 98 hPa at 5 hPa intervals	From 28 to 88 hPa at 5 hPa intervals	From 28 to 78 hPa at 5 hPa intervals
Radius of maximum winds	From 25 to 145 km, median of 54 km	From 25 to 158 km, median of 62 km	From 26 to 174 km, median of 74 km
Translation speed	From 12 to 59 km/h, median of 27 km	From 14 to 88 km, median of 45 km	From 16 to 83 km, median of 49 km
Holland <i>B</i>	From 0.45 to 1.32	From 0.56 to 1.35	From 0.66 to 1.37

Landfalling storms have track headings of  $-60^\circ$ ,  $-40^\circ$ ,  $-20^\circ$ , and  $0^\circ$  (clockwise from North) at the point of landfall. At landfall, storms had linear tracks with a starting location of  $35.0^\circ\text{N } 76.1^\circ\text{W}$  with parallel track spacing determined by the landfall region location. In all, 130 master tracks were developed. Of these, 89 were landfall track paths. All landfalling tracks apply a constant heading from 250 km prior to and post landfall. A natural spline fit is applied prior to (farther offshore of) the 250 km offshore reference location to result in track path consistent with climatology. Bypassing storms have track headings of  $20^\circ$ , and  $40^\circ$  (clockwise from North). The bypassing storm set applies storm parameters specified over the entire latitudinal range of each region (i.e., NACCS subregions 3, 2, and 1). Bypassing storms had linear tracks with parallel track spacings starting from each region's southern latitude. A total of 41 bypassing track paths were developed. All bypassing tracks apply a constant heading within each region, and transitions using a spline fit to climatologically consistent track paths outside the region latitudinal limits. For NACCS, the track path spacing was varied across the three NACCS subregions. The final master track spacing used for subregions 3, 2, and 1 were 60 km, 67 km, and 74 km, respectively. The resulting 130 master tracks are listed in Appendix B: Synthetic Tropical Cyclone Master Tracks.

In the landfall set, the storm parameters are constant until a reference location 250 km from the point of landfall is reached. Then, pre-landfall filling of the storm parameters is applied. The pre-landfall filling rates were determined based on HURDAT2 data for 45 historical storms. This same set of historical storms was used in the development of the JPM parameter set.

To reflect infilling, a 5% reduction in central pressure from the 250 km offshore point to the coastline. This reduction profile was applied to the central pressure deficit prior to landfall for the JPM storm set. Since both Holland's B and RMW depend on central pressure deficit, these parameters were also recomputed during the pre-landfall filling. An example of pre-landfall filling of storms is shown in Figure 2-2.

The combination of parameter variations resulted in a total of 1050 tropical storms as listed in Appendix C: NACCS Synthetic Tropical Cyclones.

Three variations of the 1050 tropical and 100 extratropical storms were modeled for this study. The first set was modeled on mean sea level with

no tides or long term sea level change. The second set consisted of the first set but with each storm modeled on a unique randomly selected tide phase. The third set was the same as the second except a single global sea level rise (GSLR) offset of 1.0 meter was included in the hydrodynamic simulations. An additional set of results was developed by linearly adding 96 random tide phases to the first set of results.

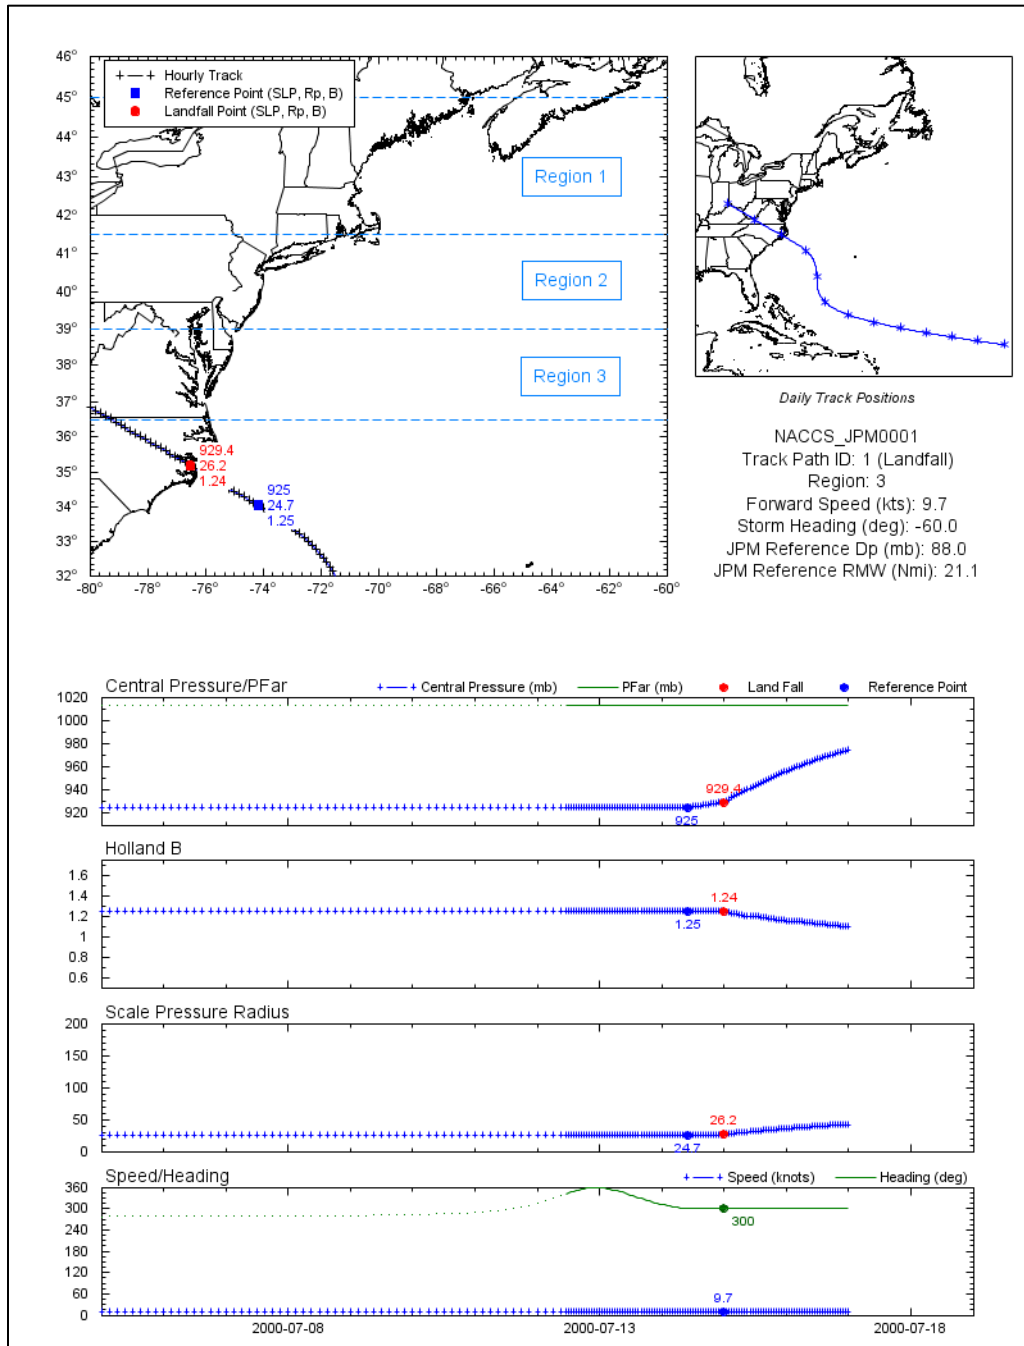


Figure 2-2. Example of along-track variations for landfalling tropical cyclones.

## **3 Coastal Storm Modeling System (CSTORM-MS)**

### **3.1 Introduction**

The Coastal Storm Modeling System (CSTORM-MS) is a comprehensive methodology and system of highly- skilled and highly-resolved numerical models used to simulate coastal storms and accurately assess risk to coastal communities. With physics-based modeling capabilities, CSTORM-MS integrates a suite of high fidelity storm modeling tools to support a wide range of coastal engineering needs for simulating, tropical and extra-tropical storms, wind, wave and water levels and for representing the coastal response, including erosion, breaching and accretion due to the storms (Figure 3-1). CSTORM-MS more rigorously represents the underlying physical processes than other existing coastal storm modeling systems. It does not have to adjust or tune coefficients to produce realistic results, reducing dependency on empirical tuning factors. The CSTORM-MS makes use of a powerful and user-friendly graphical user interface (GUI) within the SurfaceWater Modeling System (SMS). The CSTORM-MS GUIs within SMS allow for efficient configuration of models that are generally applicable to a wide range of modeling scenarios and required for accurate risk assessment of coastal storms. For the NACCS numerical modeling study, the primary modeling emphasis was to produce accurate surge and waves in the coastal zone. Accordingly, the CSTORM-MS was applied with the following models:

- WAM for producing offshore deep water waves mainly intended for providing boundary conditions to the nearshore steady-state wave model STWAVE
- ADCIRC model to simulate the surge and circulation response to the storms. The ADCIRC and STWAVE models were applied in a tightly-coupled mode using the CSTORM-MS coupling framework
- STWAVE to provide the nearshore wave conditions including local wind generated waves.

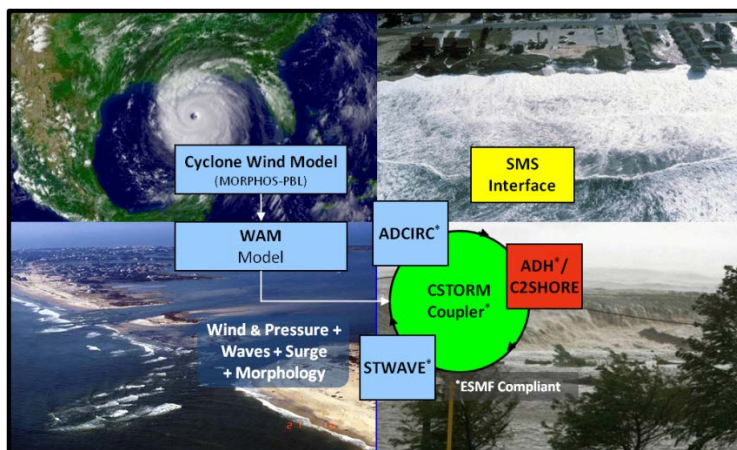


Figure 3-1. Schematic of CSTORM-MS workflow.

The CSTORM-MS coupling framework options used for the NACCS numerical modeling study tightly links the ADCIRC and STWAVE models in order to allow for dynamic interaction between surge and waves. The ADCIRC model provided the STWAVE model with updated water surface elevations along with wind fields and in turn the STWAVE model provided to ADCIRC gradients of wave radiation stresses. The execution of each model and the interchange of information between the models were controlled by the CSTORM-MS coupling framework. This type of coupling system is referred to as being tightly coupled. The information exchange between models takes place via computer memory to allow for fast and efficient sharing of information. Individual models, ADCIRC and STWAVE in turn can produce a file record of the inputs conditions that were supplied to them by the coupler. These records are useful for quality control purposes and for performing additional simulations in non-coupled mode.

A description of the winds and pressure fields is provided in Chapter 4. An overview of the offshore wave model WAM is given in Chapter 5. The applications of ADCIRC and STWAVE are found in Chapter 6 and 7, respectively. The Coastal Storm Modeling Production System (CSTORM-PS) is described in detail in Chapter 8.

## **4 Wind and Pressure Field Generation**

### **4.1 Historical Extratropical Storms Wind and Pressure Fields**

Oceanweather Inc. (OWI) generated extratropical wind and pressure fields for the 100 historical extratropical events identified in the storm selection process for the NACCS effort (Appendix A: NACCS Historical Extratropical Cyclones). A summary report detailing this effort was produced by OWI and provided to ERDC for review and reference (Oceanweather 2014). As mentioned in Chapter 2, the list of storm dates provided to OWI for generation of extratropical wind and pressure fields was identified by ERDC based on a peaks-over-threshold process. A second list of 25 substitute storms were identified by ERDC in the event that any of the selected storms was later determined by OWI to be a non-event (rain storm). Three such non-storm events were identified by OWI during their analysis (Storms 71, 3, and 9), therefore OWI generated wind and pressure fields for Storms 101, 102, and 103, respectively, in place of the non-events (Appendix A: NACCS Historical Extratropical Cyclones).

Prior to the NACCS Study, OWI developed the WIS (Wave Information Study) Level II wind fields on a 0.25 degree grid, covering the domain 22-48N 82-52W for the 1980-2011 time period. These fields applied adjusted NCEP/NCAR reanalysis wind fields as a base, then assimilated NDBC buoy/C-MAN stations and manually reanalyzed storm events using the Interactive Objective Kinematic Analysis (IOKA) methodology (Cardone and Greenwood 1993; Cox et al. 1995). Storm analysis for the WIS Study was primarily offshore (wave driven) rather than near-shore/coastal which is an essential component of the NACCS storm surge modeling.

Wind fields for the NACCS study were developed for the 100 storm set on two working grids: the original WIS Level II domain as well as a 0.125-deg domain covering 36-45N 78-66W (NACCS domain covering Virginia to Maine) (Figure 4-1). Storm analysis consisted of reanalysis of the storm core of winds generating the maximum ocean response and included the assessment/assimilation of coastal station data such as National Weather Service reporting stations and National Ocean Service stations not considered as part of the WIS effort. Background fields were sourced from the NCEP/NCAR reanalysis for the 1948-2012 periods, preserving the en-

hancements applied in the WIS effort. Storms prior to 1948 were developed from the NCEP 20th Century Reanalysis project. Matching pressure fields on both grids were sourced from reanalysis products and interpolated onto the WIS/NACCS grids. Each storm event produced by OWI contains 8 days of wind/pressure fields with the core of manual reanalysis (8 hours of meteorologist time per storm) spent on the coastal domain of the storm with high wind forcing. The reader is referred to contractor report "Development of Wind and Pressure Forcing For the North Atlantic Coast Comprehensive Study (NACCS), Oceanweather, Inc 2014" for more information.

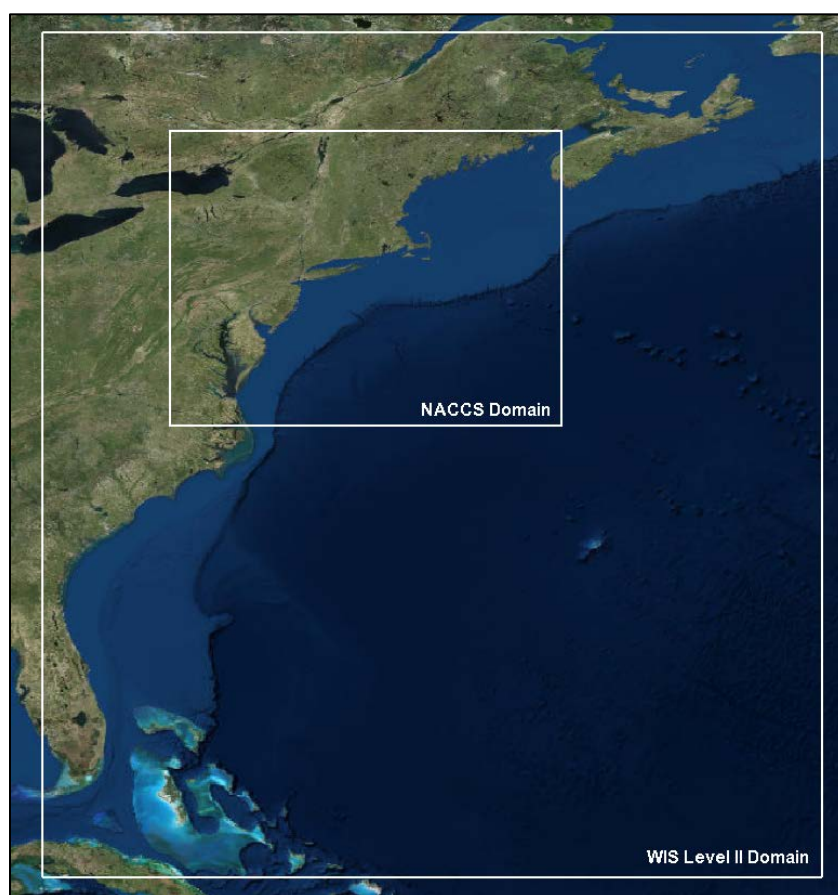


Figure 4-1. WIS Level II and NACCS wind and pressure domains.

## 4.2 Synthetic Tropical Storm Development

In addition to the extratropical storm wind and pressure fields developed by OWI for the NACCS study, OWI provided development support and analysis associated with the generation of synthetic tropical storm wind and pressure fields. Data provided to OWI by ERDC for this task included

the landfall/closest approach location (latitude/longitude), central pressure ( $C_p$ ), radius of maximum winds (RMW), and storm heading and forward speed for approximately 1050 synthetic events. OWI was responsible (with input from ERDC) to expand these landfall parameters into a full track time history to drive the ERDC Tropical Planetary Boundary Layer (PBL) Model developed by OWI as part of the MORPHOS (now CSTORM-MS) project. Additional data required from ERDC were the HURDAT storm parameters applied by ERDC for the development of the landfall statistics to ensure that the analysis done by OWI was based on a consistent set of input data.

Parameters supplied by ERDC for the 1050 synthetic set were evaluated by OWI to ensure that they were consistent with real storms previously designed and applied by OWI with the tropical PBL model. This task was not intended as a full evaluation (which would entail repeating the full analysis), but rather a check on the inputs provided to identify combinations of parameters which may fall outside previous modeling experience.

The development of a track path both pre- and post-landfall followed the same basic methodology as was applied in OWI's contribution to the FEMA Region IV Georgia/North Florida Surge study. Storm speed remained constant for the storm duration by applying the landfall speed specification supplied by ERDC. Post-landfall, the storm heading was preserved for a suitable amount of time (usually 24 hours) to allow sufficient spin-down time for the response (surge and wave) models. Prior to landfall, an analysis of mean track paths for 3 regional stratifications supplied by ERDC was evaluated to recommend a suitable turning rate (by stratification, if needed) of storm heading so that synthetic track paths were consistent with the historical record. Typically, the storm was modeled 3-5 days prior to landfall/closest approach to allow sufficient spin-up time for the ADCIRC model.

An analysis of "high intensity" ( $C_p < 965$  mb) and "low intensity" ( $965 < C_p \leq 985$ ) HURDAT storms (intensity thresholds defined by ERDC) was performed to evaluate if a pre-landfalling  $C_p$  algorithm should be applied. Extent/application of pre-landfall filling was subject to approval by ERDC. Storm conditions well away from the study area remained steady-state as has been applied in previous FEMA work. The Vickery filling model was applied post-landfall. ERDC provided algorithms to OWI to set the appropriate Holland's B and RMW values for any prescribed change in  $C_p$  so

each synthetic storm was consistent with the methodology applied by ERDC at landfall. Additional model parameters, such as the conversion from RMW to the scale pressure radius ( $R_p$ ), were determined with approval from ERDC.

Generation of synthetic tropical storm wind and pressure fields from 3-5 days prior to landfall/closest approach to 1 day post-landfall was accomplished with the tropical PBL model. Wind (WIN) and pressure (PRE) output files of 10-meter wind and sea level pressures were made on two target grids. The same WIS Level II and NACCS domains described in the extratropical wind and pressure field development were applied with the synthetic tropical storms.

Sample images of wind and pressure fields for Storm 1050 for the NACCS domain are shown in Figure 4-2 and Figure 4-3, respectively. In addition, quality control figures for both the model inputs and outputs were produced and are documented in the contractor report "Development of Wind and Pressure Forcing For the North Atlantic Coast Comprehensive Study (NACCS), Oceanweather, Inc 2014". Data was delivered from OWI to ERDC and uploaded to the ERDC HPC for application to the NACCS modeling study. WAM simulations began immediately, followed by CSTORM-MS production simulations.

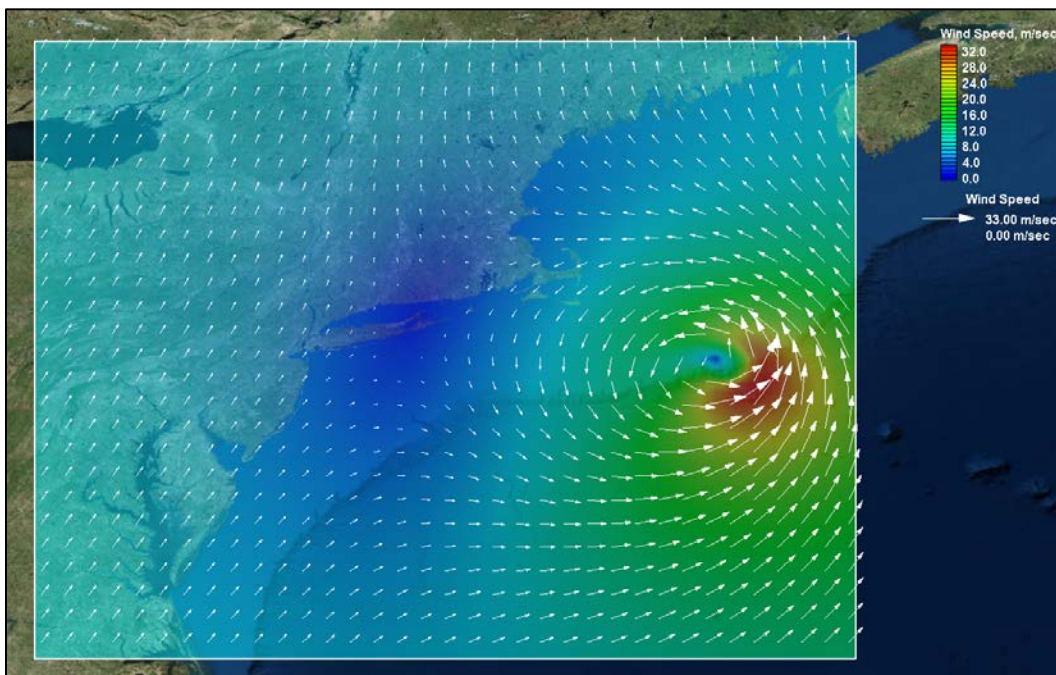


Figure 4-2. Wind field snapshot for Storm 1050 for the NACCS domain.

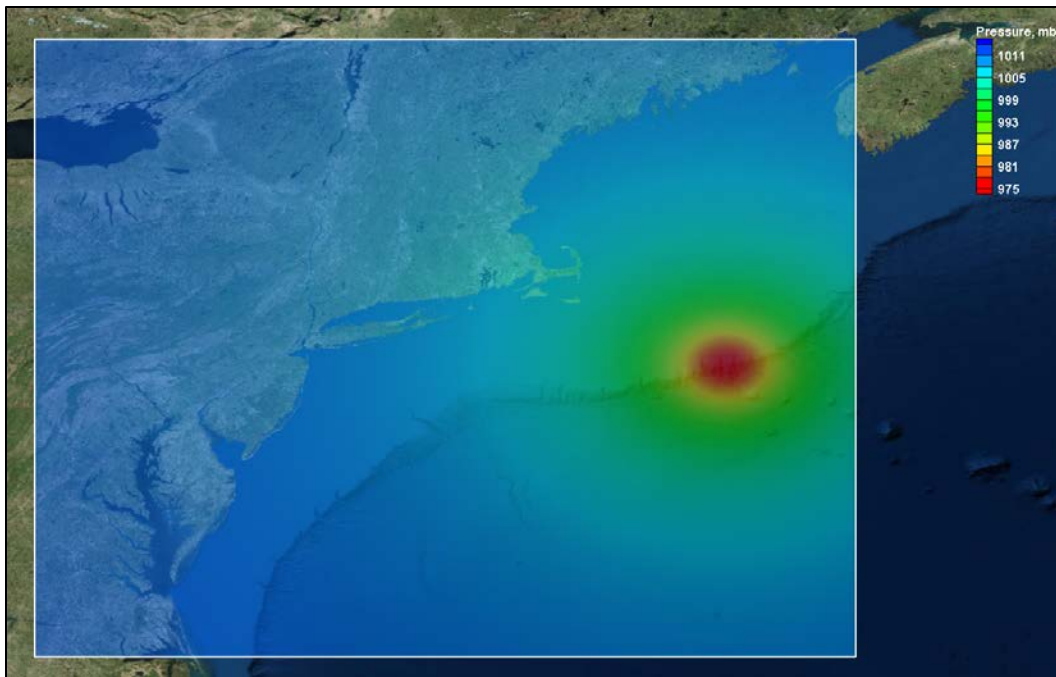


Figure 4-3. Pressure field snapshot for Storm 1050 for the NACCS domain.

## 5 Offshore Wave Generation

### 5.1 Introduction

The primary motivation of the Offshore Wave Generation task in NACCS is to estimate wave conditions during the extratropical extreme storm events (100 selected events) and synthetic tropical storm events (1050 individual events) to be used by STWAVE (Massey et al., 2011) assessing the net impact of the contribution of waves on the overall water level estimates.

The wave climate in the NACCS domain (Figure 5-1) can be generalized as a mixed locally generated wind-sea component and swell environment. Extratropical storm systems in the NACCS are dominated by Nor 'Easters that develop in response to the large temperature gradient resulting from the Gulf Stream and cold air masses coming from Canada. The larger the temperature gradient between the two air-masses the greater the turbulence and instability and more severe the storm can become. As the migration of these low pressure centers move in a northeasterly direction they can intensify or attenuate based on the loss of the cold air that is the energy source for the development of these storm systems<sup>1</sup>. These events can originate as far away as the Gulf of Mexico as in the case of the Storm of the Century (Cardone et al. 1996). These storms will elevate the offshore waves, increase the probability of extreme water levels along the coast and produce an abundance of precipitation on land. In some instances as these Nor 'Easters lift toward the northeast they lose intensity, resulting in a very different, and generally lower wave climate north of Cape Cod in the Gulf of Maine compared to the New Jersey-South shore of Long Island. Nor 'Easters can also form from merging of several weaker storms as in the case of the Perfect Storm (October 1991, Cardone et al. 1996), where warm air from a low-pressure system coming from one direction, a flow of cool dry air generated by a high pressure system from another direction and tropical moisture resulting from Hurricane Grace combined forming a massive, and extreme storm affecting the New England coast. A Nor 'Easter generally reach its maximum intensity while off the Canadian coast, and can meander in the North Atlantic for weeks at a time. Through the lifecycle

---

<sup>1</sup> The development and intensification is directly opposite of that found in tropical storm generation, requiring warm surface water temperatures.

cle of a N “Easter, the resulting wave climate along the coast is initially dominated by local-wind seas increasing in magnitude as the winds increase, then as the storm lifts to the northeast, the local wave climate would transition to long-period swell energy. On the other hand, tropical systems are rare event but they do exist in the NACCS domain and can have a devastating effect along a coastline. In general, as a tropical system moves north of Cape Hatteras, there is a tendency for the forward speed to increase; are modulated by synoptic-scale systems (combining with low pressure centers, picked up by fronts) and affected by the jet-stream. These systems are rare (12 land-falling systems occurring along the NACCS coastline), and based on track position are very random. Even for by-passing tropical systems (e.g. Luis, 1995 or more recently in 2014 Gonzalo, Edouard, Cristobal and Bertha) these systems can radiate long-period swell energy and have a significant impact on the coastal environment.

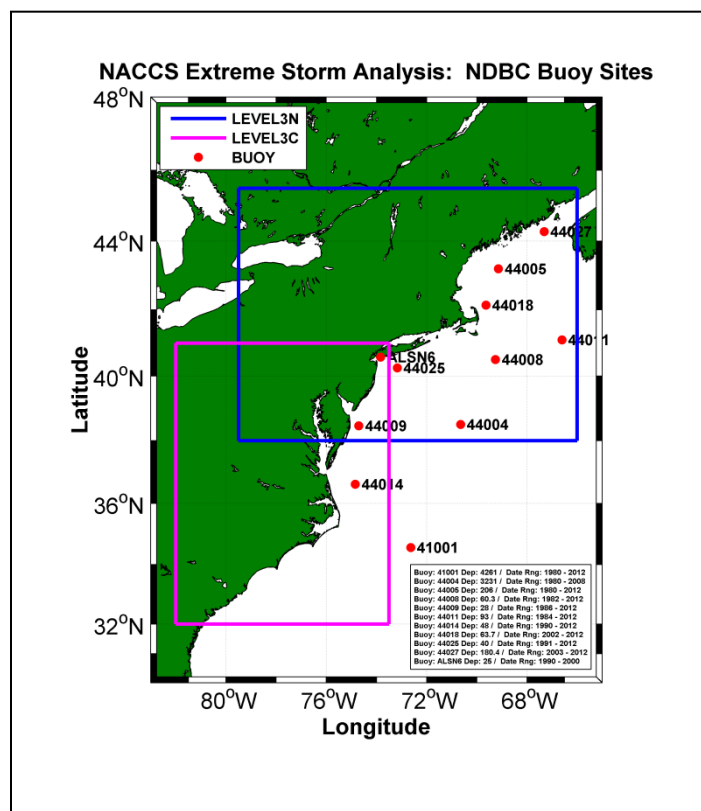


Figure 5-1. Offshore wave model Regional and Sub-region domains, and NOAA National Data Buoy Center sites used for extreme wave storm analysis.

The local wave climate of the NACCS becomes more complex looking further into the Atlantic Ocean Basin. Thompson (1980) indicated from a se-

ries of wave gages positioned along the Atlantic coast the wave climate is dominated (65-percent) by multiple wave systems occurring at the same time. For the evaluation of extreme storm events, especially the extratropical events, special care is required to account for far-field wave energy. In general, one primary storm event will stand out over all other events, however selective coastal areas will be impacted by all energy in the large-scale domain. For example, (Figure 5-2) during the migration of SuperStorm Sandy, Hurricane Rafael (Cat-1) was making landfall along the Portugal coastline, Tropical Storm Tony was developing in the central Atlantic Ocean radiating swell energy to the US coastline along with the locally generated wind-seas from SuperStorm Sandy. To a lesser degree the Halloween Nor 'Easter (or the Perfect Storm, Figure 5-3), the evidence of the No-Name Storm just south of Long Island, Tropical Storm Grace, and Fabian east of Florida. Wave energy contained in these systems by virtue of their respective storm tracks will emit swells to the Atlantic coast.

Focusing on the local wave conditions will provide a part of the solution however accounting for all wave energy, whether the levels are minute compared to the major system will impact the final results. Indications from Smith and Vincent (1992) suggest swell energy in the presence of a high frequency wind-sea component will be unaffected in the decay stages as the energy is transmitted to the coast. This can only be accomplished with proper estimation of the winds, spatial and temporal scaling of the meteorology and using a wave modeling technology that will properly simulate the complex extratropical systems (100 extreme events) identified in the NACCS.

The simulation of the 1050 synthetic tropical events is on the other hand somewhat more straightforward. The tropical wind fields are derived from a Planetary Boundary Layer Model (Thompson and Cardone, 1996), the winds appear as a moving vortex (Cardone et al. 1992), with prescribed central pressure, radius to maximum wind, forward speed, Holland B parameter (Holland, 1980) and the inflow angle. This reduces the problem to one single storm system, and is contained in the NACCS Regional domain. Locally (to the tropical system) wind-seas develop, and as downshifting in frequency of the spectral energy takes place, swell energy will radiate outward forward of the storm system. There will be no resulting far-field wave energy (derived from the Atlantic Ocean Basin) to consider. The storm's simulation length is fixed where the duration of the storm is esti-

mated based on the time of entrance into the Regional NACCS domain extending to one day after landfall.

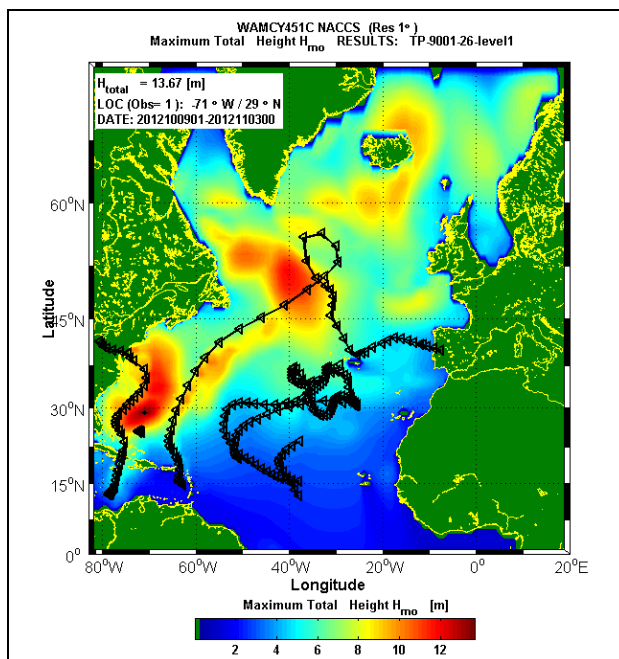


Figure 5-2. Maximum wave height envelope during SuperStorm Sandy 26-day simulation, where five tropical systems were evident in the Level 1 Atlantic Ocean domain.

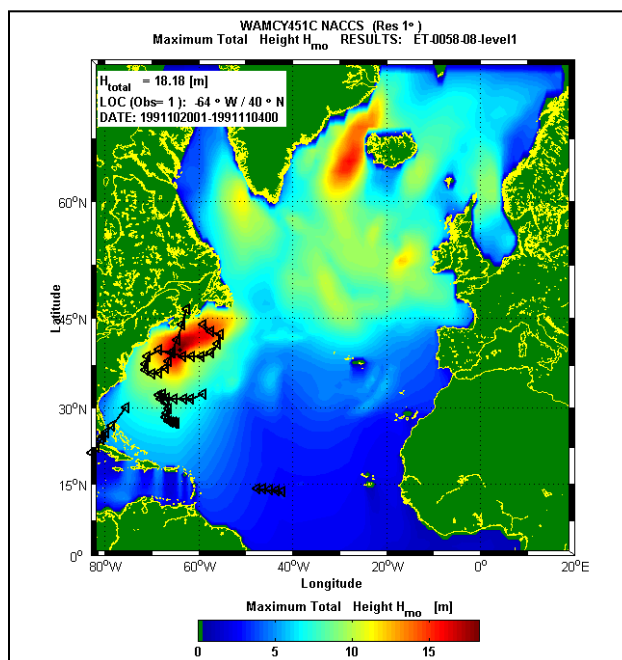


Figure 5-3. Maximum wave height envelope during Halloween Nor 'Easter (ET0058-8) 8-day simulation, where three tropical systems were evident in the Level 1 Atlantic Ocean domain.

Proper testing and evaluation is required prior to the production step in the generation of the offshore wave conditions for NACCS. This includes the grid systems and bathymetry, model set-up (grid resolutions, model resolutions-frequency/direction intervals, time steps for propagation and source term integration, and optional mechanisms identified), and storm duration properly defined. For the latter case, this is more critical to the extratropical events because they represent real conditions, but also contain in the coastal region wave energy derived from distant storm events.

A synopsis of these steps is provided in the sections below. In addition selected examples from the evaluation analysis and production procedures will be documented. The final sections will summarize the results from the extratropical and synthetic tropical event production storm sets.

## 5.2 Wave Model Selection.

The wave modeling technology used to generate the offshore wave estimates for NACCS is the WAM model (Komen et al. 1994). The model is a 3<sup>rd</sup> Generation wave model, where there are no a priori assumptions governing the spectral shape, and the source terms are solved and consistent to the wave model's frequency/directional spectral resolution. WAM was developed by a consortium of wave theoreticians, and modelers over a ten year period specifically used by Weather Prediction Centers (the European Center for Medium Range Weather Forecasts, ECMWF), researchers and in the private sector. WAM is similar to other 3<sup>rd</sup> generation wave models like WaveWatch III (Tolman, 2014), or SWAN (The SWAN Team, 2014).

The model solves the Action Balance Equation (Equation 1 and displayed below) for the temporal and spatial change in action. Wave action is selected because the model could be used in an area containing surface current fields given by:

$$\frac{DN}{Dt} = \frac{1}{\omega} \left[ S_{in} + S_{nl} + S_{ds} + S_{w-b} + S_{br} + \sum_{i=1}^N S_i \right] \quad (1)$$

where:

$N$  = wave action ( $N=E(x,y,t,f, \theta)/\omega$ )

$t$  = time

$\omega$  = radial frequency ( $\omega=2\pi f$ )

- $S_{in}$  = atmospheric input source term (wind forcing)
- $S_{nl}$  = nonlinear wave-wave interaction source term (moves energy across the frequency domain)
- $S_{ds}$  = high frequency dissipation sink term (energy loss due to white-capping)
- $S_{w-b}$  = wave bottom (e.g. bottom friction energy loss)
- $S_{br}$  = depth-induced wave breaking sink term.

The last term represents additional source/sink mechanisms some of the 3<sup>rd</sup> Generation wave models retain (Tolman, 2014; SWAN Team, 2014).

In deep water the above equation reduces to:

$$\left\{ \frac{\partial}{\partial t} + \vec{c}_g \cdot \frac{\partial}{\partial \vec{x}} \right\} E(\vec{k}, \vec{x}, t) = \sum_{i=1}^N S_i \quad (2)$$

where:

- $C_g$  = vector group speed (dependent on frequency)
- $k$  = vector wave number (related to frequency,  $f$  and direction,  $\theta$ )
- $S_i$  =  $S_{in}$ ,  $S_{nl}$ ,  $S_{ds}$ ,  $S_{w-b}$ , and  $S_{br}$  identified above.

WAM solves the Action Balance Equation (Equation 2) in two steps. The first step is propagation or advection of energy over the model grid domain (the second term on the left side of Equation 2). The second step is to solve for the source terms, adding energy from the wind forcing ( $S_{in}$ ), transferring energy across frequency bands ( $S_{nl}$ ), compensating for energy losses due to white-capping ( $S_{ds}$ ), removing energy (where applicable) from wave-bottom effects ( $S_{w-b}$ , bottom friction), and then in very shallow water collapse of the spectrum resulting from depth induced wave breaking ( $S_{br}$ ). The result after one time step is the spatial and temporal change of  $E(x,y,t,f,\theta)$ . For the NACCS offshore wave climate generation the WAM frequency range is defined by:

$$f_{n+1} = 1.1 \cdot f_n \text{ where } f_0 = 0.03138428 \cdot s^{-1} \mid n=1, 28$$

$$\theta_m = 7.5 + 5.0 \cdot (m - 1) \mid m=1, 72$$

### 5.3 WAM Grid Development.

The second major task in the generation of the offshore wave climate for NACCS is to develop, and test the model's grid system. A multi-level WAM

grid system used by the Wave Information Study (WIS) was applied to and modified for application to the NACCS (<http://wis.usace.army.mil/>). The original WIS grid system included a Basin (Level 1), Region (Level 2) and four Sub-Regions (Level 3N, 3C, 3S1, and 3S2). These grids were quality controlled, and manually edited to place offshore islands, and to match high-resolution shorelines. The Atlantic Basin domain (Level 1) and Atlantic Regional domain (Level2) grids remained intact for NACCS. The coastal WIS grids 3N and 3C were modified (altered the domain boundaries). The WIS Level 3S1 and 3S2 were removed. Most if not all point source wave measurement sites used in the model evaluation are identified by the red symbols identified in Figure 5-4 and Figure 5-5. The final model grid domains, resolutions used, time steps, and the wind field boundaries (spatial and temporal resolutions) for all evaluation testing are identified in Table 5-1.

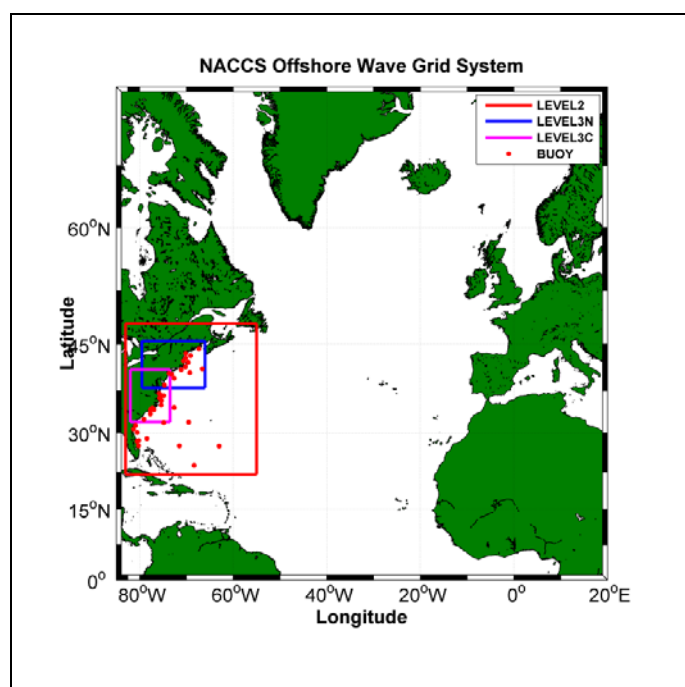


Figure 5-4. WAM multi-level grid system used in NACCS. Note Level 1 covers the entire domain illustrated.

The three multi-level grid system identified in Figure 5-4 and Figure 5-5 were used for all evaluation tests and all extratropical extreme storm simulations. The role of the Level1 simulations is only to resolve the far-field wave energy providing that information at the Level2 boundaries (Figure 5-4 red box). Two-dimensional spectral estimates define the boundary condition information provided at a 900-s interval. Following the Level1

simulation the Level2 domain is run, creating boundary conditions for Level3N and Level3C. Once Level2 simulation completes, the Level3N and Level3C simulations commence creating boundary condition information to be used in the STWAVE simulations.

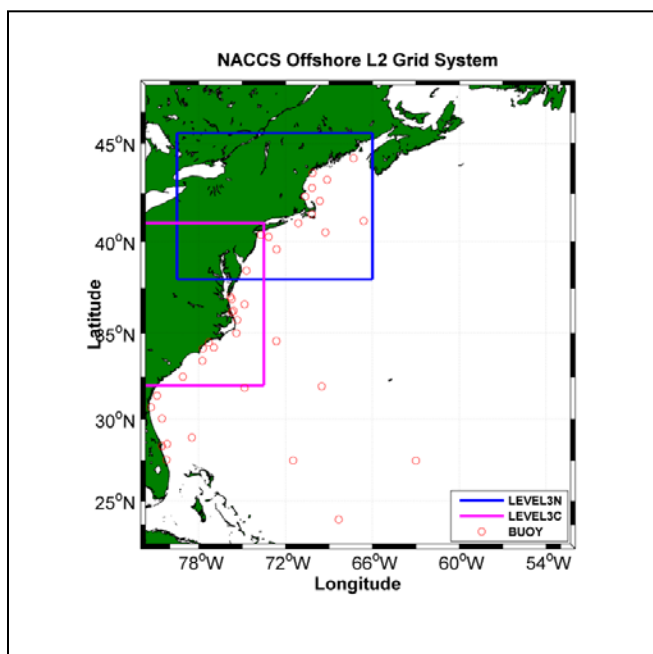


Figure 5-5. WAM multi-level grid system used in NACCS. Note Level 2 covers the entire domain illustrated.

Table 5-1. Model grid information evaluation testing.

Domain	WAM Boundary Extent				WAM $\Delta x/\Delta y$	Wind*		WAM Time Steps (s)		Depth Effects
	Longitude		Latitude							
	West	East	South	North		$\Delta x/\Delta y$ (deg)	$\Delta t$ (hr)	$\Delta Prp$	$\Delta ST$	
Level 1	-83.33	+20.83	0.00	75.625	1.0 / 1.0	.833/ .625	6	900	900	Deep
Level 2	-82.00	-52.00	22.00	48.00	.25 / .25	.25 / .25	1	400	400	Shallow
Level 3N	-79.50	-66.00	38.00	45.50	.083 / .083	.25 / .25	1	200	200	Shallow
Level 3C	-82.00	-73.50	32.00	41.00	.083 / .083	.25 / .25	1	200	200	Shallow

\*Winds used in all Evaluation Tests were derived from the WIS archive

## 5.4 WAM Model Evaluation

Evaluation testing is a requirement in any study such as NACCS. It is necessary to test and evaluate the wind forcing, wave modeling technology, grid systems used and the operational system to be implemented during the production phase. The evaluations are based on time, scatter, Quartile-

Quartile graphics (Q-Q), and a battery of statistical tests (Bias, Root-Mean-Square-Error, Regression, Correlation, Symmetric Correlation, Scatter Index, Skill Score). The principle focus of the wave model evaluation is on the extreme storm period of record and the storm peak condition. The wind fields are also assessed at the same sites for the similar sites used for the WAM comparisons. These results will provide sufficient information to determine the causes of any differences found in the wave model results compared to that measured. The evaluation analysis also provides the basis to test all operational production shells, determine the run times required for each simulation, pre-setting check for consistency in the model output locations compared to all point source measurements (also over time), boundary condition locations in the Level3N and Level3C regions used for input to the STWAVE (Massey, et al. 2011) nearshore wave simulations, additional quality control of all available point-source wave/meteorological data and their availability.

A series of extreme storm events were initially tabulated for these tests. Five tropical storms (Figure 5-6) and seven extratropical events were selected and listed in Table 5-2. These events were chosen based on long-term archive water level measurement sites in the NACCS domain.

The original tests were started at least one month prior to the storm eventually affecting the NACCS domain. It was assumed to capture all far-field wave energy from the Atlantic Ocean basin, a sufficient amount of time, and in this case one-month (or more) was assumed to properly estimate all energy sources in the Atlantic Ocean Basin.

Table 5-2. Baseline extreme storm events.

Storm Type	yr/mnth	Storm Name	Peak Date	Storm No.	Winds Used	BCs Gen
Tropical	2012-09	Sandy	20121029	TP-9001	WIS* / L1-L2	YES
	2012-10				WIS / L1-L2	YES
	2012-11				WIS / L1-L2	YES
Tropical	2011-07	Irene	20110828	TP-9002	WIS / L1-L2	YES
	2011-08				WIS / L1-L2	YES
	2011-09				WIS / L1-L2	YES
Tropical	2003-07	Isabel	20030918	TP-9003	WIS / L1-L2	YES
	2003-08				WIS / L1-L2	YES
	2003-09				WIS / L1-L2	YES
Tropical	1996-08	TS-Josephine	19961009	TP-9004	WIS / L1-L2	YES

Storm Type	yr/mnth	Storm Name	Peak Date	Storm No.	Winds Used	BCs Gen
	1996-09				WIS / L1-L2	YES
	1996-10				WIS / L1-L2	YES
Tropical	1985-08	Gloria	19850927	TP-9005	WIS / L1-L2	YES
	1985-09				WIS / L1-L2	YES
	1985-10				WIS / L1-L2	YES
Extratropical	1996-10	ET-0073	19961206	ET-0073	WIS / L1-L2	YES
	1996-11				WIS / L1-L2	YES
Extratropical	1995-10	ST-0069	19951115	ST-0069	WIS / L1-L2	YES
	1995-11				WIS / L1-L2	YES
Extratropical	1994-02	ET-0066	19940303	ET-0066	WIS / L1-L2	YES
	1994-03				WIS / L1-L2	YES
Extratropical	1993-12	ET-0065	19940104	ET-0065	WIS / L1-L2	YES
	1994-01				WIS / L1-L2	YES
Extratropical	1991-11	ET-0058	19911211	ET-0058	WIS / L1-L2	YES
	1991-12				WIS / L1-L2	YES
Extratropical	1986-12	ET-0054	19870123	ET-0054	WIS / L1-L2	YES
	1987-01				WIS / L1-L2	YES
Extratropical	1984-02	ET-0050	19840329	ET-0050	WIS / L1-L2	YES
	1984-03					

\*WIS: Wave Information Study long-term hindcast wind fields were used for all evaluation tests.

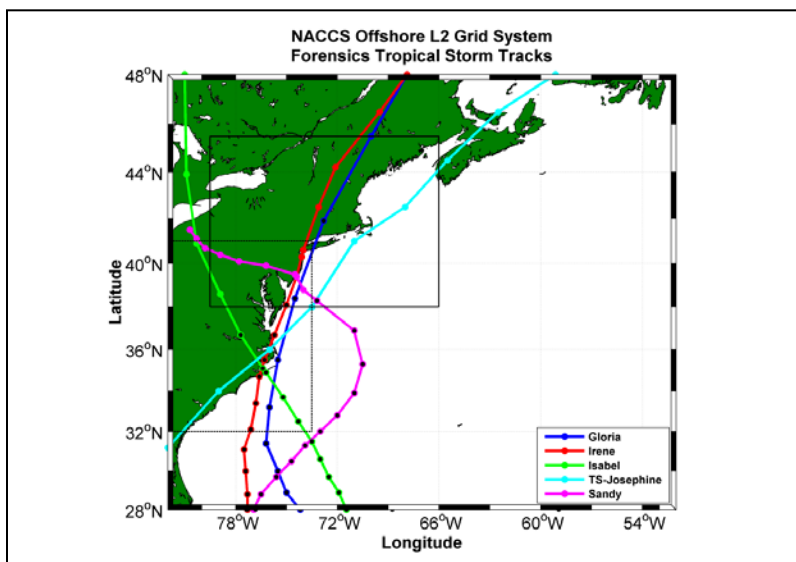


Figure 5-6. Five tropical storm tracks used in evaluation tests. Level3N and Level3C domains are identified by the black boxes, black dot represents hurricane intensities of Cat-1 and higher.

The selected tropical events provided sufficient information to evaluate WAM's performance under hurricane conditions. A preliminary list developed as part of this study was derived from water level and local (coastal) meteorological measurements. In many cases these events were not major wave events; hence an independent analysis was performed for the purpose of evaluating WAM for large wave events. Eleven NDBC sites were selected for this purpose (Figure 5-1). These sites were selected based on their record length of at least 10-years being sufficiently long to quantify the offshore wave climate. This technique is somewhat flawed because any wave measurement record contains gaps, from missing hourly, monthly or at times yearly records. In addition, there is a strong likelihood of a buoy transmission failure in or around high winds and/or wave conditions. Hence, there is a high probability that major storm conditions are missing from the wave record. Despite these potential flaws, each buoy record was evaluated based on a peaks-over-threshold (mean plus 2 times the standard deviation,  $\sigma^2$ ) to determine a storm condition.

The evaluation process isolated all tropical and extratropical events and tropical events were omitted from the extratropical list. The final top ten extratropical storms were selected based on:

- Availability of wind fields (1980 through 2012) derived from the Wave Information Study (Oceanweather, Inc. prepared wind fields).
- Maximum number of available buoy sites (of the eleven selected) with data during the storm period.

The list of added extratropical storms selected for the model evaluation study of WAM is presented in Table 5-3. As noted in Table 5-3, there were four extreme wave events found in this analysis that were not part of the extreme storm population. This most likely was due to the buoy locations selected residing in offshore (50-100 km from shore) rather than close to the coast.

These additional ten extreme wave events would provide the means to fully test the wave model, procedures to be used in the production, isolate any wind field deficiencies, distinct grid problems or other factors that could contaminate the final wave estimates.

Table 5-3. Evaluation testing extratropical extreme wave events.

Storm Type	yr/mnth	Storm Name	Peak Date	Storm No.	Winds Used	BCS Gen
Extratropical	2011-12	N/A	20120114	ET-9304	WIS / L1-L2	YES

Storm Type	yr/mnth	Storm Name	Peak Date	Storm No.	Winds Used	BCS Gen
	2012-01				WIS / L1-L2	YES
TP-Noel*	2007-11	N/A	20071103	ET-9303	WIS / L1-L2	YES
	2007-11				WIS / L1-L2	YES
Extratropical	2007-03	ET-0086	20070416	ET-0086	WIS / L1-L2	YES
	2007-04				WIS / L1-L2	YES
Extratropical	2005-02	N/A	20050309	ET-9302	WIS / L1-L2	YES
	2005-03				WIS / L1-L2	YES
Extratropical	2004-11	N/A	20041227	ET-9301	WIS / L1-L2	YES
	2004-12				WIS / L1-L2	YES
Extratropical	2003-11	ET-0080	20031206	ET-0080	WIS / L1-L2	YES
	2003-12				WIS / L1-L2	YES
Extratropical	1995-12	ET-0070	19960108	ET-0070	WIS / L1-L2	YES
	1996-01				WIS / L1-L2	YES
Extratropical	1993-02	ET-0062	19930305	ET-0062	WIS / L1-L2	YES
	1993-03				WIS / L1-L2	YES
Extratropical	1992-11	ET-0060	19921211	ET-0060	WIS / L1-L2	YES
	1993-12				WIS / L1-L2	YES
Extratropical	1991-12	ET-0059	19920104	ET-0059	WIS / L1-L2	YES
	1992-01				WIS / L1-L2	YES

\*It was assumed this storm was extratropical (from the November date), however it was later identified as Hurricane Noel.

A total of twenty-two extreme storm events were simulated (five tropical and seventeen extratropical) using WAM with the multi-level grid nesting and domains defined in Table 5-1 (and shown in Figure 5-4). All wind fields used in these tests were derived from the Wave Information Study wind field archive (Table 5-1 for domains and resolutions). All runs were started from an initial condition based on simple wave growth approximations. From that point they were run for the entire storm period identified in Table 5-2 and Table 5-3. The Level1 simulation fed boundary condition information (two-dimensional spectral estimates) to the Level2 region; the Level2 simulation fed boundary condition information to both the Level3N and Level3C domains. The Level3 domains were run, and during that time two-dimensional spectral estimates were saved STWAVE (Massey et al., 2011) boundary locations (Figure 5-7) at a time-step between 5- to 30-minute intervals.

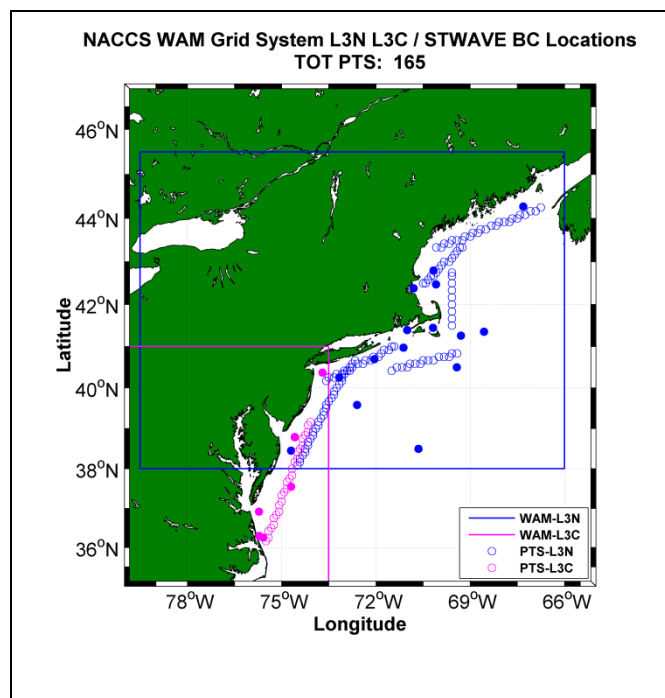


Figure 5-7. STWAVE boundary condition save points (open circles), buoy sites (solid points). Initialization analyses use both STWAVE boundary points and measurement sites.

Approximately thirty wave measurement sites were used (Level1, Level2, Level3N and Level3C) for these storms; however at times not all of buoys were fully operational during a given simulation. The evaluation of the model's performance is based on comparisons of the model simulated waves to the wave measurements. Preliminary results were generated and examples are provided from the SuperStorm Sandy simulation for Level3N and Level3C (Figure 5-8 and Figure 5-9, respectively). Results for the remaining four tropical simulations compared well to the measurements, however there was a slight net increase in errors (based on bias, Root-Mean-Square-Error, Scatter Index, Correlation) proceeding back in time.

Compendium time plots are provided for the Level3N (Gulf of Maine, Figure 5-8; Long Island, Figure 5-9) to illustrate the temporal and spatial quality of the model results spanning the region. For the southern domain (Level3C), the number of active buoy sites was limited, and for illustration purposes one location is shown (Figure 5-10). WAM replicates the measurements well at the five northern region sites (Figure 5-8). There are some phasing and elevated conditions at 44005 prior to the peak of the storm. Most of these errors are derived from the wind field being slightly high (2-4 m/s) during that time period. The remaining sites show excellent agreement, from the initial growth, through the storm peak and then

decaying at the same rate as the observations. Moving to the five Long Island sites, the WAM results also produce high quality estimates (Figure 5-9). The model tracks the measurements from growth through the storm peak and decay. Capturing peaks ranging from over 9-m offshore to 3-m at 44020 (Nantucket Sound) in a water depth of 9.8-m provides evidence that WAM can replicate SuperStorm Sandy-like storms. These results also imply the high quality of the wind forcing derived from the Oceanweather, Inc. winds fields applied in the Wave Information Study and now applied to the NACCS WAM simulations.

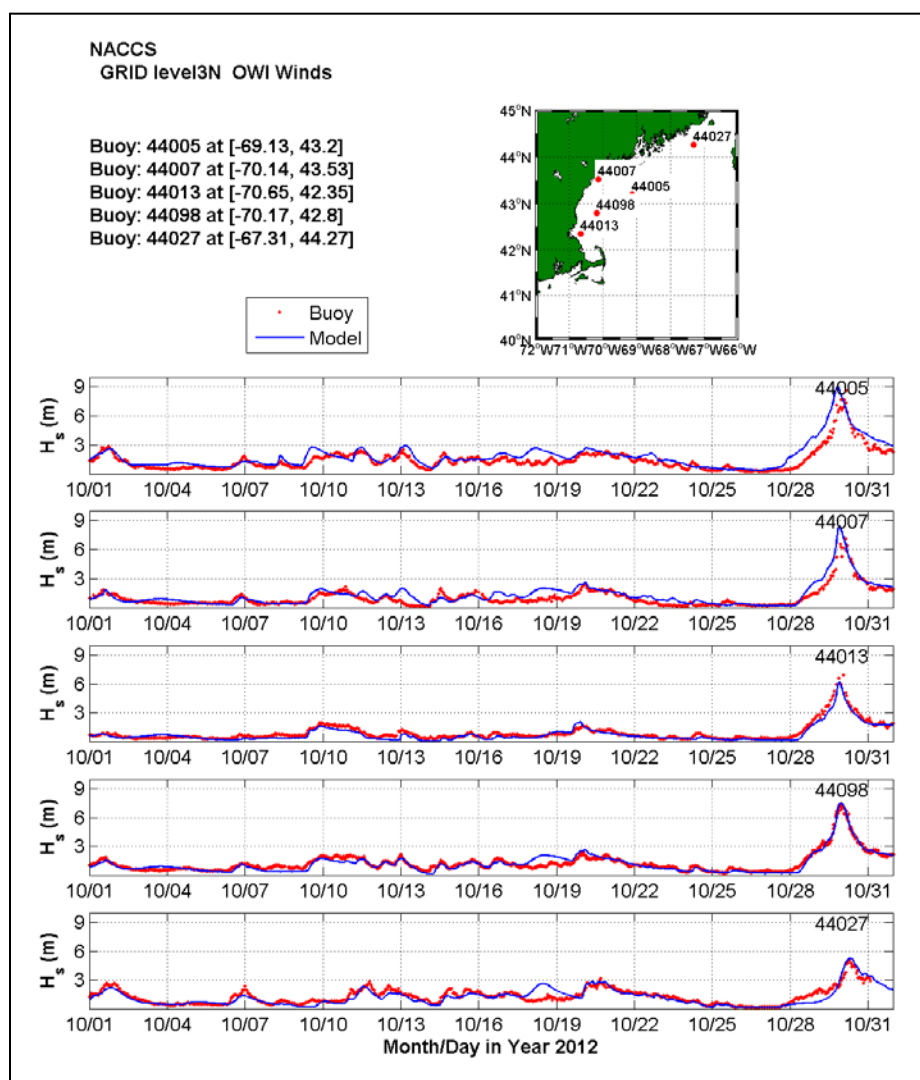


Figure 5-8. Evaluation of WAM Level3N, northern region results for five wave measurement locations.

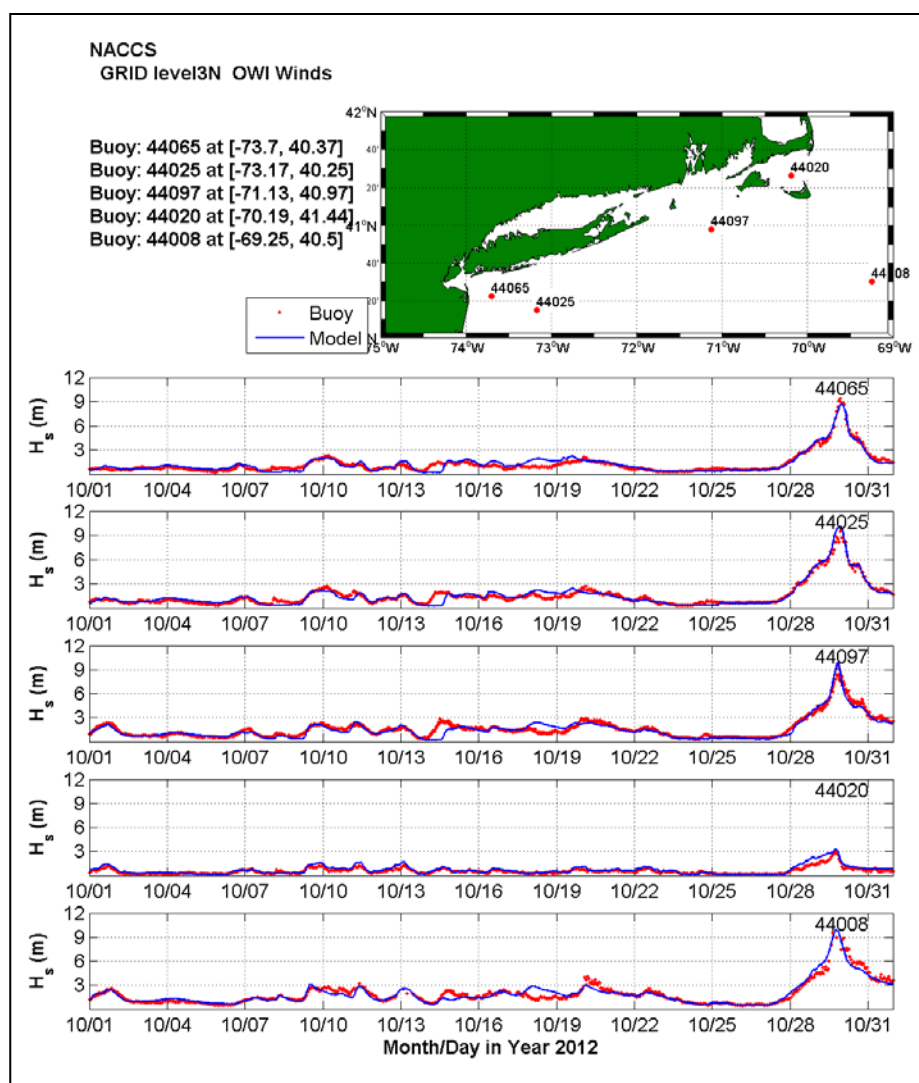


Figure 5-9. Evaluation of WAM Level3N, Long Island region results for five wave measurement locations.

Of the seven sites in the southern portion of the NACCS region, only three were actively recording wave data during this storm event. Buoy 44099 is just offshore of Chesapeake Bay and shows a vastly different wave height trace compared to the other ten sites shown for the Long Island and northern domains (Figure 5-10). The storm peak for 44099 is only 4-m (compared to 7- and 9-m), and does not show the rapid intensification of the storm peak that is observed at the Long Island and northern domains. Buoy 44095 (in the southern domain) was also recording and shows a similar trend to Buoy 44099.

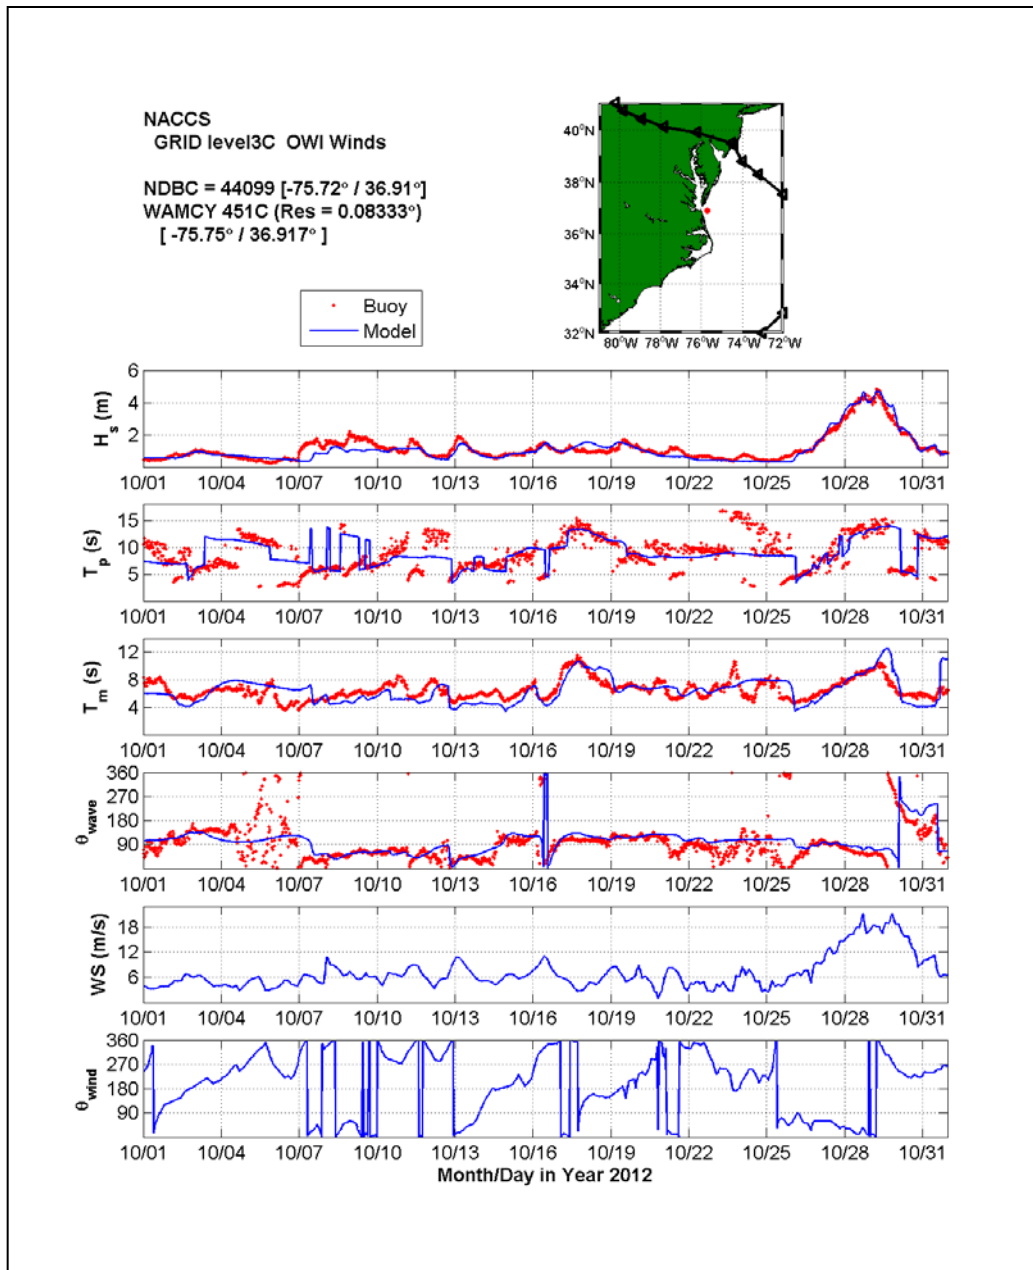


Figure 5-10. Evaluation of WAM results at NDBC 44099, the significant wave height, parabolic fit wave period, the mean wave period, and the vector mean wave direction.

WAM again performs well for SuperStorm Sandy. Modeled wave heights emulate the measurements and both mean and peak wave period estimates follow the measurement trends. There is a slight difference in the mean wave period results soon after the storm peak, where WAM tends to increase the low frequency energy, whereas the measurements follow a newly formed wind-sea. This is also evident in the peak wave period results, showing a phase difference between the two model results and

measurements. The modeled wave direction also follows the measurements from the growth and peak sequences. Soon after the storm peak, there is a divergence between the modeled and measured wave direction. WAM tends to follow the swell energy longer before moving to the new wind-seas as is the case of the measurements.

## 5.5 Model Sensitivity to Simulation Length

In order to minimize computation time while retaining quality of the wave estimates during the extreme storm event peaks, sensitivity tests to simulation length were made. Simulations lengths were performed and compared to the base condition. Starting the simulation prior to the storm peak is required to insure that far-field wave energy has sufficient time to propagate into the study domain. The WAM evaluation is based on comparisons between the base-line runs (padded one month prior to the storm peak) versus the 5-, 10-, 15- and 20-day padding. For brevity two examples are provided for the L3N domain: one tropical storm (SuperStorm Sandy) and one extratropical event (ET-0062, Storm of the Century March 1993) and comparisons were made at 165 special output locations (Figure 5-11 through Figure 5-14).

The first event was a rapidly moving extratropical storm which occurred over a 3-day period. Plotting all individual time series results in a wave height envelope as found in Figure 5-11. This shows the temporal change in all 165 special output locations, essentially defining the range of conditions for the entire data set. Analysis of these time-series shows that the differences in results between the 20-, 10- and 5-day pad around the storm peak is negligible (identified by the green curve and less than 0.1-m). In contrast to this observation, the maximum differences occur immediately after the initiation of the simulation, and occur during transitions between growth and lull sequences in the wave records. Though the focus is on one principle event (in this case the peak just prior to 15 March), there are additional meteorological events in the Atlantic Ocean that have an impact on the local NACCS study area. In addition, the start of the simulation may occur during the growth sequence of a minor event (e.g. Figure 5-11 around 4 March) that generates the largest differences. However the time period around the selected storm event is well replicated even with a 5-day pad (Figure 5-12). Investigating further, Figure 5-13 shows the results from time-pairing the baseline wave height estimates compared to the 5-, 10- and 20-day padded results. Two obvious trends emerge from this analysis. The first is that the 10-day padded wave estimates display larger dif-

ferences than in any other simulation, including the 5-day pad. Most if not all of these differences are a result of where the start of the simulation occurs (see Figure 5-11) relative to where a minor event occurs. In this case, a minor event begins to develop around 4 March and rapidly evolves to about 5-m wave heights. This storm sequence is well replicated in the 20-day pad, and occurs prior to the initiation of the 5-day pad simulation. Looking closely at the scatter plot (Figure 5-14) and the wave height trace for the selected/focus storm (14 March), there is very little observable difference in wave heights greater than about 5-m to the peak of the storm of nearly 14-m.

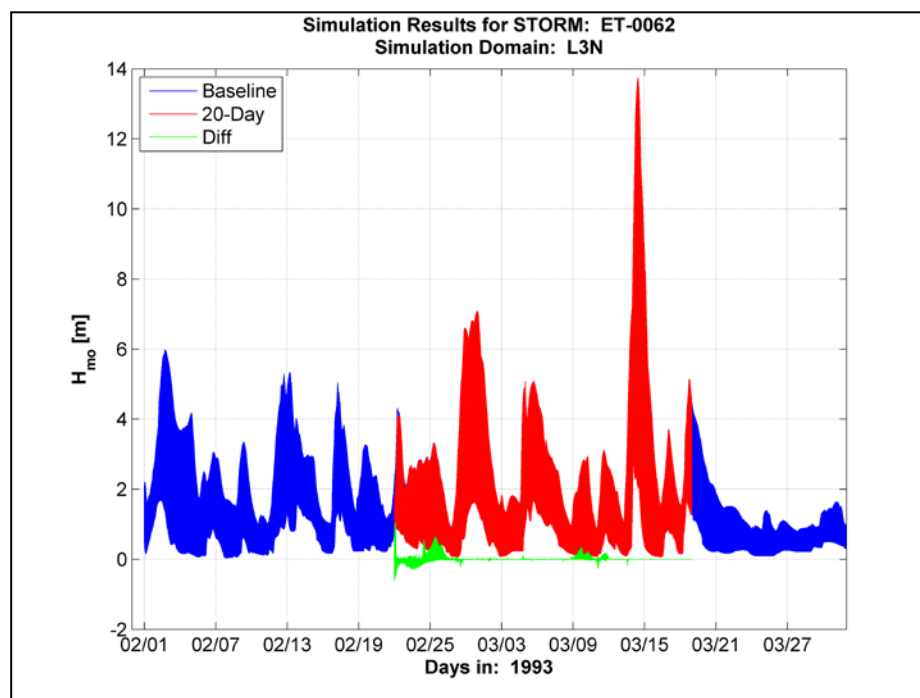


Figure 5-11. Time plot envelope of 165 special output locations for 20-day pad, Storm of the Century.

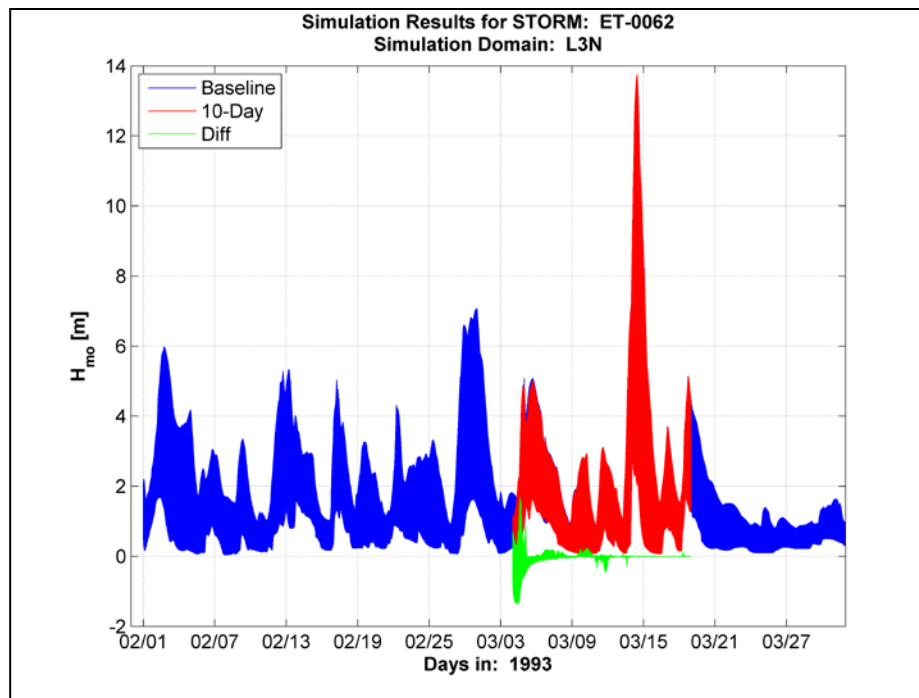


Figure 5-12. Time plot envelope of 165 special output locations for 10-day pad, Storm of the Century.

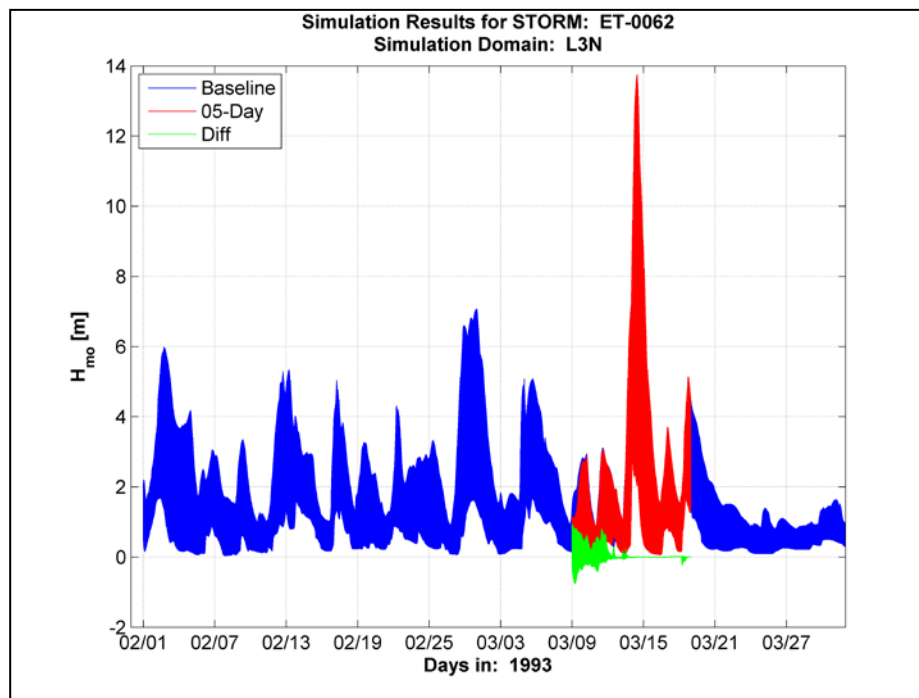


Figure 5-13. Time plot envelope of 165 special output locations for 05-day pad, Storm of the Century.

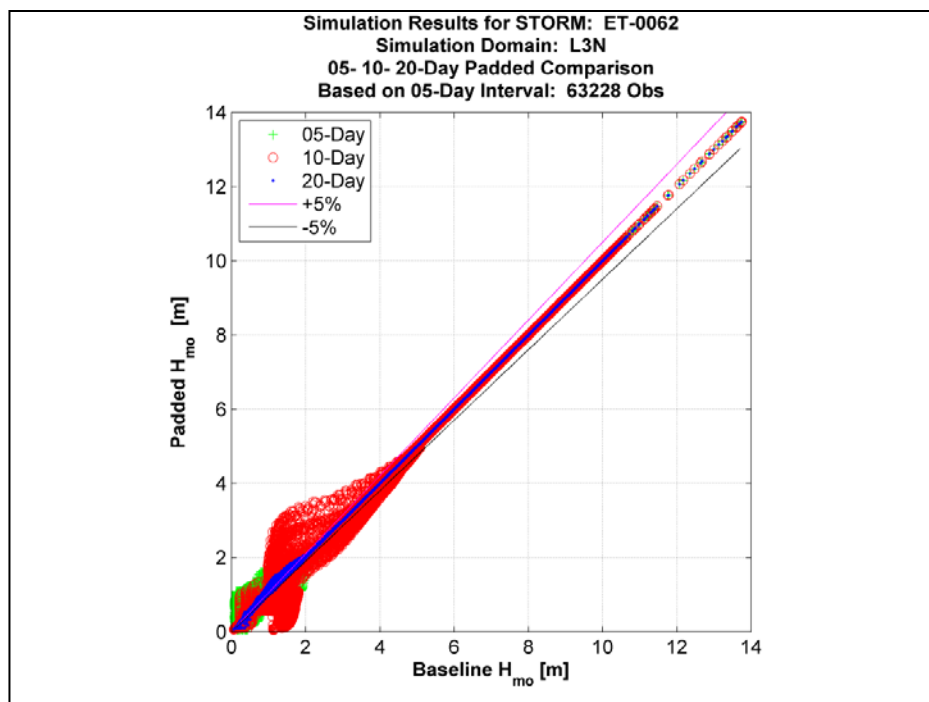


Figure 5-14. Scatter plot of time paired results of 165 special output locations compared to base-line (30-day pad), Storm of the Century.

The results from SuperStorm Sandy (Figure 5-15 through Figure 5-18) show a similar trend to what was describe in the previous example. There are very small differences between the 20- and 10-day pad results (Figure 5-15 and Figure 5-16) during the growth, peak and decay sequences of SuperStorm Sandy at all locations. However, the 5-day pad results clearly show about a 0.5 m difference at the initial growth stages of the storm sequence (Figure 5-17). Clearly these differences are small compared to the peak estimates of 10-m but they still represent a 5-percent discrepancy relative to the storm peak. The scatter plot derived from the time-paired estimates between the base-line simulation and the three padded results (Figure 5-18) show little or no differences above a 4-m wave height.

This analysis indicates the need for some criteria to be selected in order to set the initialization of the deepwater WAM simulations. For brevity, and introducing a certain degree of conservatism, all simulations will use a 10-day pad for the starting date in the Atlantic Ocean Basin Simulations (Level1). The boundary conditions generated from these simulations should be sufficient to define the far-field wave energy in the higher resolution simulations. All finer resolution domains will be initiated at the start times defined in the wind field. Despite shortening the spin-up for these domains, the boundary condition information (two-dimensional wave spectra)

should contain most if not all of the far-field wave energy derived from distant storm events.

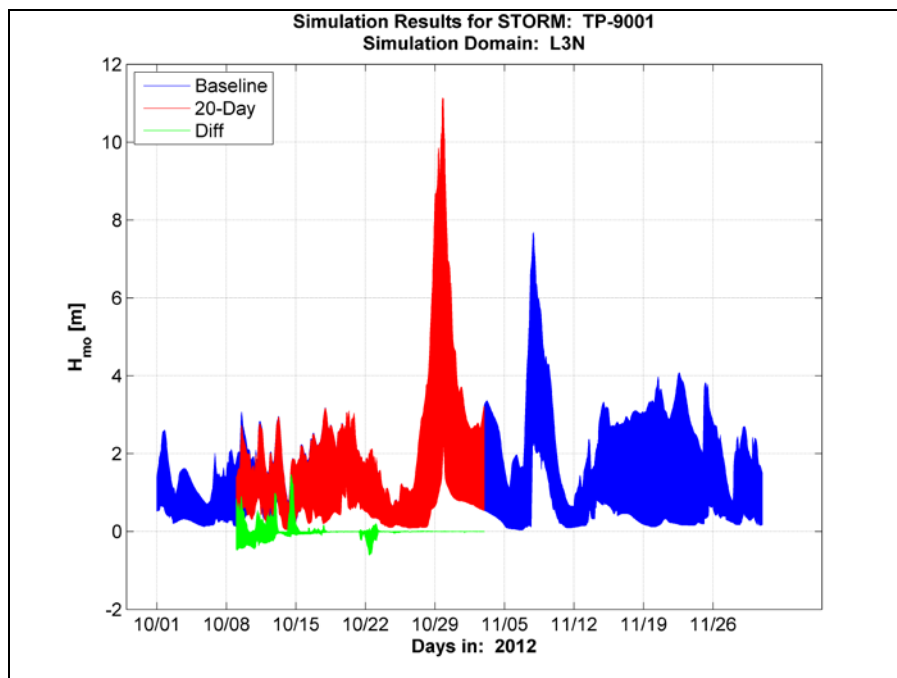


Figure 5-15. Time plot envelope of 165 special output locations for 20-day pad SuperStorm Sandy.

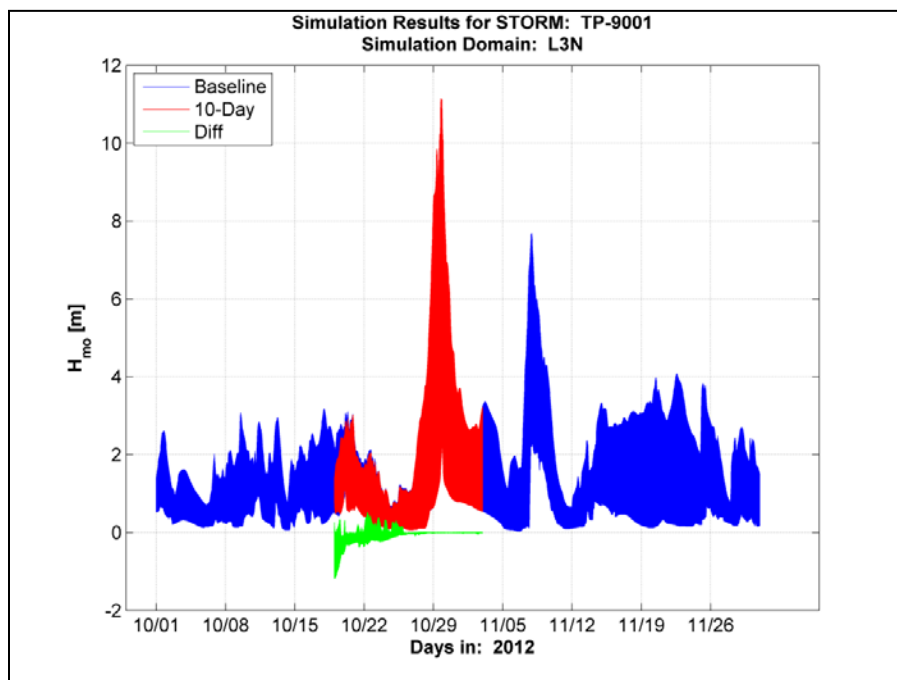


Figure 5-16. Time plot envelope of 165 special output locations for 10-day pad SuperStorm Sandy.

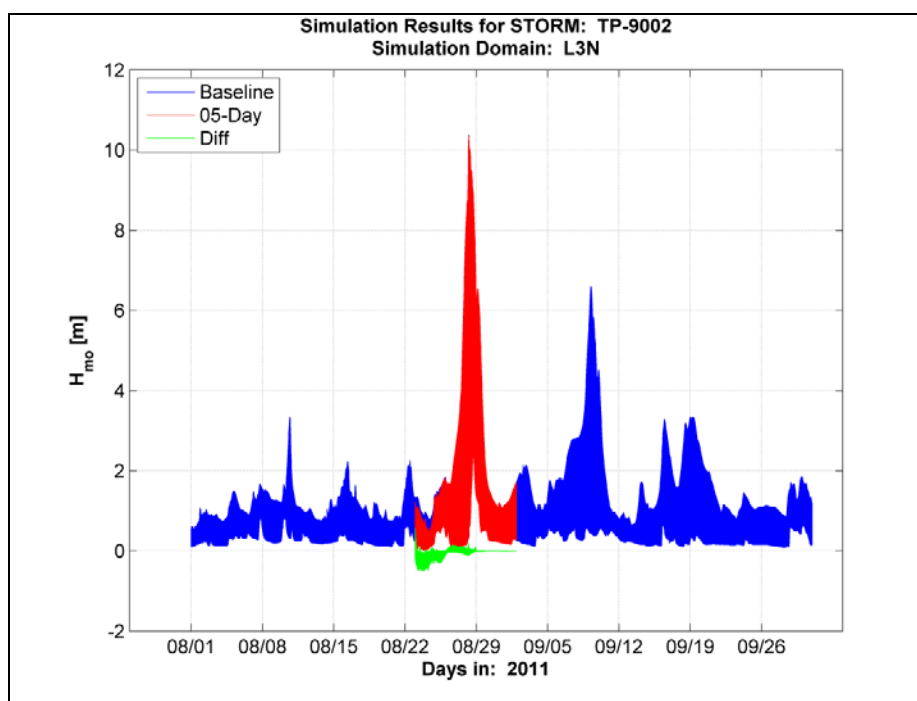


Figure 5-17. Time plot envelope of 165 special output locations for 05-day pad Hurricane Sandy.

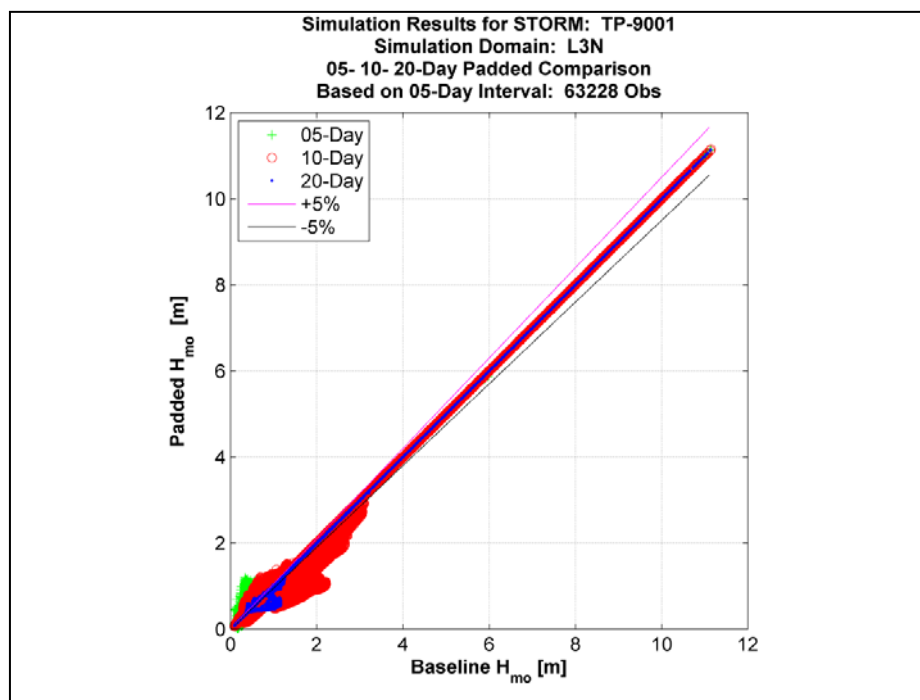


Figure 5-18. Scatter plot of time paired results of 165 special output locations compared to base-line (30-day pad), Hurricane Sandy.

## 5.6 Summary of Model Evaluation and Testing

Twenty-two extreme storm (seventeen extratropical and five tropical) event simulations were run using the three level grid systems, initiating the Level1 (Atlantic Ocean) 10-days prior to the storm peak. The Level2, Level3N and Level3C were run according to the final extreme storm simulation period of 8-days, where the start date was four days prior to landfall, and the end date was three days after landfall (or 4-day:1-day:3-day). WAM simulations used the WIS wind fields for all levels as noted in Table 5-1. All storm simulations were individually evaluated based on time, scatter, Quartile-Quartile graphics and a battery of statistical tests. Each evaluation storm simulation and the number of point-source measurement sites used in the evaluation are presented in Table 5-4. The number of sites decreases back in time and also decreases as the simulation approaches the coastline. The total number of sites for all extratropical events tested is 353, and for the tropical events simulated a total of 141 locations. In most all instances, the sites found in either Level3N, Level3C were also tested in Level2 and Level1 (i.e. double or triple counted). These results will provide the means to compare the increase in WAM resolution and also the increased resolution of the wind fields. The summary information provided and discussed below focuses on the Level2, Level3N and Level3C results.

Most importantly, the tropical storm simulations used in the evaluation portion of the study were derived from actual events and not synthetic as in the 1050 tropical storm population production data set.

Table 5-4. Number of point source measurement sites model evaluation testing.

Storm No.	Date	Description	WAM Grid Levels				Total	Total2
			Level1	Level2	Level3N	Level3C		
ET-0050-08	1984-03	-	3	1	0	1	5	
ET-0054-08	1987-01	-	3	0	0	1	4	
ET-0058-08	1991-02	-	10	5	1	3	19	
ET-0059-08	1991-01	-	9	5	1	2	17	
ET-0060-08	1992-12	-	7	5	1	2	15	
ET-0062-08	1993-03	Storm of Century	7	5	1	2	15	
ET-0065-08	1993-01	-	7	5	1	2	15	
ET-0066-08	1994-03	-	5	4	1	1	11	
ET-0069-08	1995-11	-	7	5	1	2	15	

Storm No.	Date	Description	WAM Grid Levels				Total	Total2
			Level1	Level2	Level3N	Level3C		
ET-0070-08	1995-01	-	7	4	1	1	13	
ET-0073-08	1996-12	-	6	4	1	1	12	
ET-0080-08	2003-12	-	10	7	2	2	21	
ET-0086-08	2007-04	-	16	10	2	3	31	
ET-9301-12	2004-12	Added	10	7	1	2	20	
ET-9302-12	2005-03	Added	9	8	2	2	21	
ET-9303-12	2007-11	Added (Noel)	19	11	1	3	34	
ET-9304-12	2012-01	Added	37	29	10	9	85	353
TP-9001-16	2012-10	Sandy	24	17	6	5	52	
TP-9002-16	2011-08	Irene	26	16	4	7	53	
TP-9003-16	2003-09	Isabel	9	7	2	0	18	
TP-9004-16	1996-10	TS-Josephine	6	4	1	2	13	
TP-9005-16	1985-09	Gloria	3	1	0	1	5	141
<b>TOTAL</b>			<b>240</b>	<b>160</b>	<b>40</b>	<b>54</b>	<b>494</b>	

During each storm simulation for each measurement site the WAM evaluation generates a set of graphical products. Given the total number of buoy locations it is more prudent to summarize the results in a concise fashion. The results are based on time-paired model and measurement data sets and combined into four graphics: bin averaged scatter plot; color contour plot; Quartile-Quartile (Q-Q) plot and a Taylor Diagram (Taylor, 2001). The latter graphic provides a concise statistical summary of how well model and measurements match in terms of their correlation, Root-Mean-Square Error (RMSE), and the ratio of their standard deviation. The results depicted in the four panel plots will provide the means to summarize these results. The WAM results for all twenty-two evaluation storm events are shown in Figure 5-19.

A total of nearly 84,000 time-paired observation/model points have been used to generate these results. The binned averaged plot shows the distribution of all individual time-paired model and measurements (open circle is the mean, the vertical lines identify the  $\pm$  standard deviation ( $\sigma^2$ ); the color contour plot shows the population density of the distribution with the linear fit line defined (where the results are forced to a 0. intercept) and the 95-percent confidence limits; the Q-Q plot represents a cumulative distribution comparison where extreme values (tail of the wave height probability density function where the rightmost point is the 99.99-

percentile) are clearly identified. The Taylor Diagram is slightly more difficult to interpret. Three different statistical measures are plotted in the same graph. The correlation coefficient (statistic derived from least squares linear fit to the data) is represented by the blue dashed radial lines. The higher the correlation, the better the model fits the measured data. The dashed green contours (centered about the value of 1 along the x-axis) indicate the RMSE, or a measure of the spread in the model results relative to the measurements. The lower the RMSE the lower the spread about the mean, and the lower the error in the model estimates. The last statistical variable plotted is the normalized Standard Deviation (solid black contours, centered on the origin). The standard deviation of the model results are normalized by the observations, and thus the closer to (1,0) the better the results. There is an “X” identified in the figure representing a Perfect Fit to all variables: Correlation of 1.0, RMSE of 0., and a normalized Standard Deviation of 1.

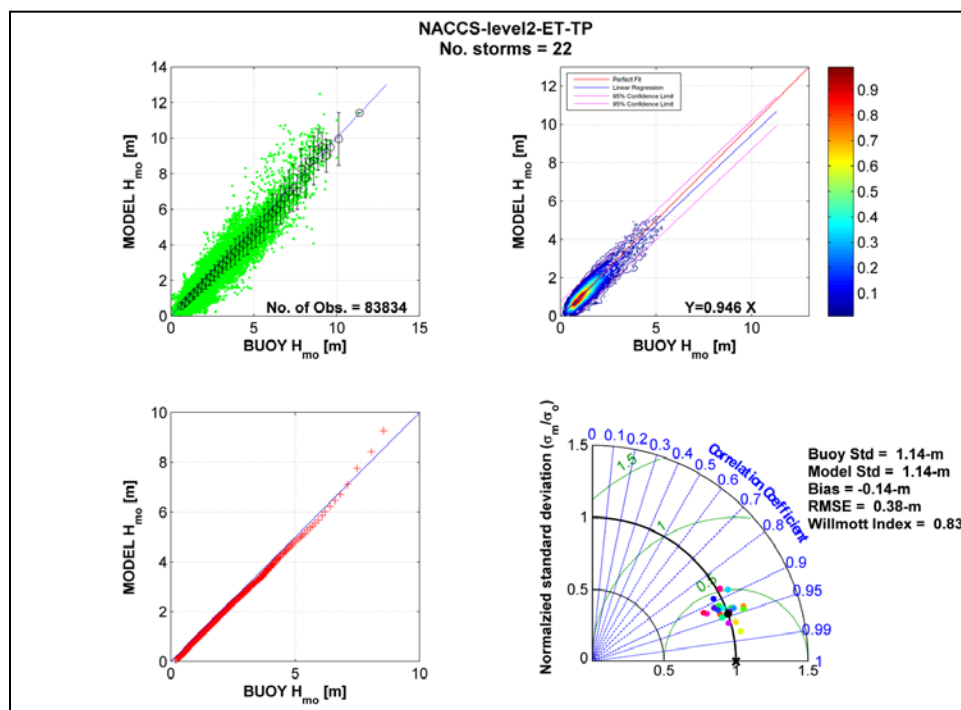


Figure 5-19. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level2 results derived from the extra- and tropical storm set.

The Level2 WAM results for all twenty-two extreme storm events selected for the evaluation test are presented in Figure 5-19. In general the results are very good. The trend in the WAM results (bin average) compare favorably to the measurements, however there is a slight under estimation in

the model  $H_{mo}$  estimates between 3- to 7-m but that difference is less than 0.25-m. Looking at the top of the scatter plot, there are signs of the model over estimating the larger wave height conditions. The color contour plot (Figure 5-19 upper right panel) shows a similar trend. The color contours will not identify all time-paired model and measurement points. The distribution shows a limit around 5-m despite containing data greater than this threshold as shown in the bin averaged scatter diagram. This noted, the model results when contoured remain in the 95-percent confidence band, and from the linear fit (using a zero intercept) shows over the average the model results are about 5-percent low compared to the measurements. This result (despite over estimating the high  $H_{mo}$  values) is weighted heavily on the larger population of low (less than 2-m) wave height values contained in the data set. The Q-Q emulate the previous two graphics; a modest negative bias in wave heights less than about 7-m then an increasing positive bias in the larger wave heights peaking at the 99.99-percentile at about 0.5-m for nearly 9-m conditions. The results plotted in the Taylor Diagram are found in a very small area of the plot, where the individual storm simulation results are consistent. The correlation ranges from 0.97 to 0.87, the RMSE is about 0.5-m, and the normalized standard deviation is close to 1.0. Over the mean of all storm simulations (solid larger black symbol) the Correlation is about 0.94, with a RSME less than 0.5-m and normalized standard deviation of 1.0. Overall the WAM results are quite good replicating the  $H_{mo}$  conditions derived from the seventeen extreme extratropical and five tropical events.

The summary continues with the Level3N, plotting the WAM results for all twenty-two events in the four panel plot (bin average, color contour, Q-Q and Taylor diagram) found in Figure 5-20. The number of time-paired observations is over a factor of four lower for the Level3N WAM evaluation, however the 20,000 points is sufficiently large to carry out a meaningful assessment of the model's performance. The Level3N bin average graphic is very similar to that of Level2. The distribution of the data is nearly uniform on either side of the 45-deg line (perfect fit); however WAM again tends to under estimate  $H_{mo}$  values for heights greater than 5-m (indicated by the open symbols). The divergence does not grow and remains at about 0.25- to 0.5-m. The series of six dots where WAM does poorly is during ET-9304-16 (Jan 2014), where a very local coastal jet emerged in close proximity to NDBC 44005 elevating the wave height to a maximum of near 9-m while the remaining three point source measurement sites recorded  $H_{mo}$  values from 4- to 6-m. From the data, it appears the modeled winds

were biased low by 6-m/s and the directions were rotating to the south while the buoy recorded near constant easterlies. This event was not selected as an extreme extratropical event so the wind forcing in the Level3N domain (0.083-deg) used a bi-linearly interpolated 0.25-deg WIS Level2 wind field strongly suggesting a wind error.

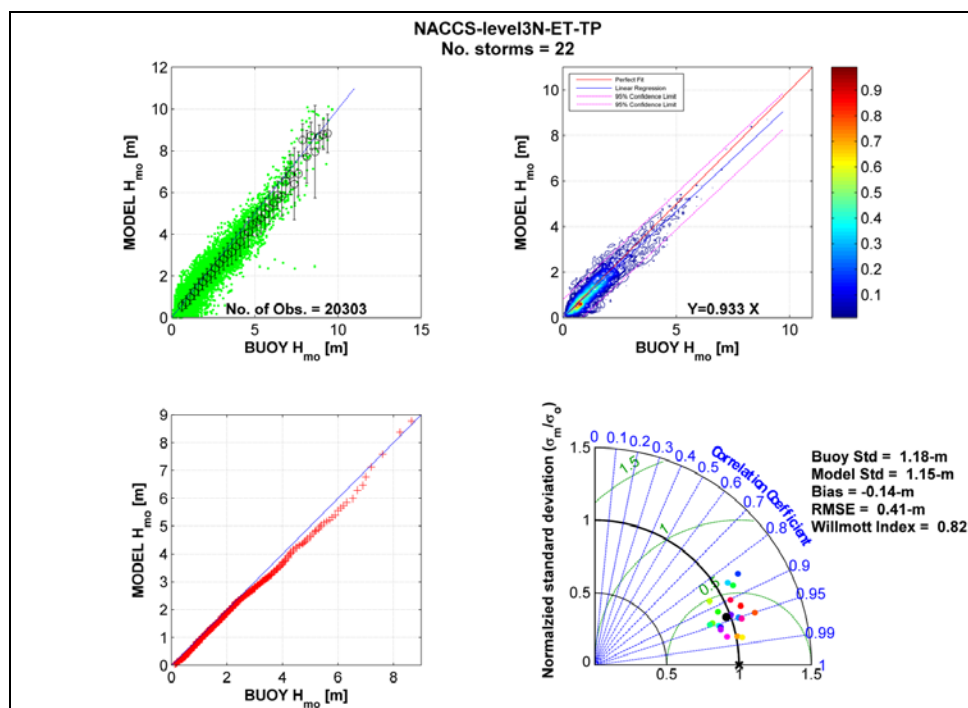


Figure 5-20. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level3N results derived from the extra- and tropical storm set.

The color contour plot (Figure 5-20 upper right panel), emulates the Level2 results. The distribution generally falls within the 95-percent confidence limits, with exception of the lobe of relatively low wave heights (2-m and less), where WAM is biased low. The linear fit (symmetric fit) indicates the model results over the mean are biased low by about 7-percent. This is a result of the large population of extremely low wave heights (red lobe) residing below the 45-deg line (perfect fit). The Q-Q graphic (Figure 5-20 lower left panel) reflects the preceding two results. The WAM slight under-estimation (between 3- to 7-m) is very obvious in plot. However for the larger  $H_{mo}$  values WAM tends to recover and only slightly over-estimates for conditions of about 9-m. Last, are the results shown in the Taylor diagram (Figure 5-20 lower right panel). The cloud of data points is larger compared to Level2, or a greater spread in the statistical results. The range of Correlation Coefficients is between 0.85 to about 0.97; the

RMSE is between 0.75 to 0.30-m, while the normalized Standard Deviation is between 0.75 and 1.25. Despite the individual increase in errors, the overall result (large black symbol) is only slightly lower than that represented in the Level2 (Figure 5-19, lower right panel) results. These results are indicative of wind resolution deficiencies used in the nine (five tropical and four added extratropical storms) evaluation storm event population. In general for a very complicated meteorological and wave climate domain WAM did very well estimating these extreme events.

Level3C is the remaining domain to be tested. The near 26,000 time-paired model and measurement data points reflect a slightly larger population size for the twenty-two storm events simulated compared to the Level3N. The first obvious difference found in the Level3C results is the scatter of time-paired model to measurement data shown in the bin average (Figure 5-21 upper left panel). As the  $H_{mo}$  increases the over and under estimation in modeled results increases. In addition, the  $\sigma^2$  (vertical lines) are longer than Level2 or Level3N even for low wave height estimates. This indicates the WAM results for the Level3C domain show a greater variability compared to the measurements.

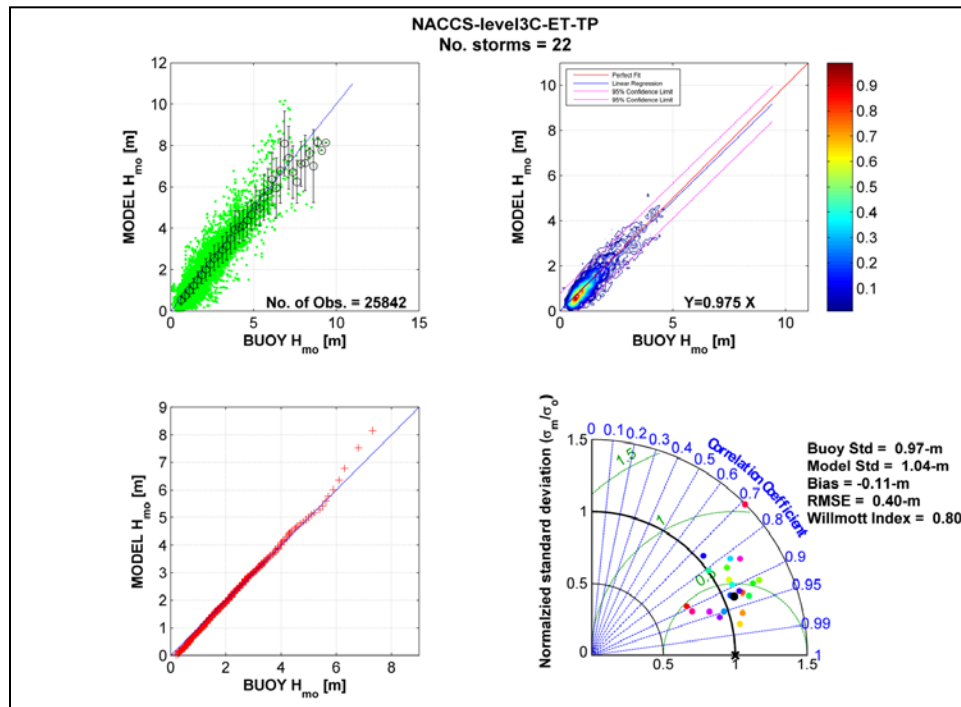


Figure 5-21. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level3C results derived from the extra- and tropical storm set.

The bin average also displays an increase in the number of over estimations in the WAM estimates (i.e. higher than the line of perfect fit). Embedded in the Level3C data are measurements obtained from the USACE's Field Research Facility (FRF) 17-m Waverider buoy located about 3-km offshore. The bathymetry in this region consists of straight and parallel contours with some local variation. However the WAM grid resolution used is 5-min (or about 7.5-km for this latitude) and would be difficult to co-locate the FRF's Waverider in the grid. This would be a predominant source of error and dependent on the direction of the wave climate, the local winds and other site specific factors in and around the buoy site. It is quite possible and likely this one site is contaminating the summary statistics. Removing this set of data would improve the statistics but would significantly reduce the population size. The color contour plot (Figure 5-20 upper right panel), the high population of low ( $< 1.5$ -m)  $H_{mo}$  results where WAM is negatively biased. However throughout the range of wave heights the model replicates the measurements quite well remaining within the 95-percent confidence limits. The linear fit indicates over the mean WAM has a 2.5-percent error (again reflecting the negative bias), which is an improvement compared to the results found in Level2 and Level3N. The Q-Q graphic clearly reflects quality in the WAM results for  $H_{mo}$  values slightly less than 6-m, following the line of perfect fit. However above this threshold, WAM results diverge yielding a positive bias growing as  $H_{mo}$  increases to a maximum of about 0.5-m for a 7.5-m wave height (about a 6.5-percent error). Analysis of the Taylor diagram indicates a larger range in the statistics for the time-paired model and measurements data set for Level3C. The poor results in the Correlation (less than about 85-percent) is primarily based on limited data (despite the near 26,000 individual points) for the more historical events selected (e.g. ET-0050, ET-0054), and the uncertainty in spatially co-locating the FRF Waverider to the WAM grid. The number of active wave measurement sites contained in Level3C varies between zero and nine, where in general the number of sites is on the order of one or two. Of the limited number of sites, the FRF Waverider was one, and thus negatively weighed (or skewed) the results. Despite these inherent errors the majority of the WAM results have an RMSE less than 0.5-m, the Correlation is generally 90-percent or greater and the normalized  $\sigma^2$  values range from 0.75 to 1.25 with mean values of Bias of -0.11-m, RMSE of 0.40-m and very acceptable.

In summary, from the results of the evaluation tests it was concluded the modeling technology WAM provided good estimates for the large variety

of extreme tropical and extratropical storm events. The multi-level grid system (Level1: Atlantic Ocean Basin, Level2: Atlantic Coastal Regional domain, Level3N and Level3C: Atlantic Coastal Sub-Regional domains) were well posed accounting for the spatial variability in the geographic features in the NACCS area. The winds used for these tests were derived from the WIS Atlantic Hindcast developed by Oceanweather, Inc. were very accurate accounting for the multiple meteorological scales of the weather patterns (both tropical and extratropical events) associated with the Atlantic. Lastly, noting that all extratropical storm simulations used an eight-day storm duration (-4-days:1-day:3-days) it was concluded padding the Atlantic Ocean Level1 by 10-days (e.g. -10-days:1-day:3-days) was sufficient to account for all distant wave energy capable of reaching the NACCS domain. From this effort, production of the 100 Extreme Extratropical Storm Events, and the 1050 Extreme Synthetic Tropical Storm Events could be simulated. Note that for the 100 Extratropical Storm Event simulations the evaluation of the WAM (and OWI wind fields) would be carried out to the time when the point-source measurements were no longer available.

## **5.7 WAM Production 100 Extratropical Storm Events**

The motivation of the WAM Simulation of the 100 Extratropical and 1050 Synthetic Tropical Storm Events is to provide offshore and input boundary condition information to drive the nearshore STWAVE (Massey et al., 2011) simulations as part of the NACCS. The only change between the input conditions defining the production and that of the evaluation tests are the areal coverage of the:

- Level2 Wind Fields
- Level3 Wind Fields
- Level3N and Level3C WAM domains

There may be slight confusion between the winds used in the WAM and CSTORM (notably ADCIRC) simulations. The offshore wave estimates are based on three grid levels for all extratropical simulations and two levels (Level2 and Level3) for the synthetic tropical events. The CSTORM wave and surge estimates are based on only two sets of winds, omitting the Atlantic Ocean Level1 fields. In this section we carry the three level naming conventions for consistency. The domains for these new definitions are provided in Table 5-5, and graphically represented in Figure 5-22.

Table 5-5. Model grid information production.

Domain	WAM Boundary Extent				WAM Δx/Δy	Wind*		WAM Time Steps (s)		Depth Effects
	Longitude		Latitude			Δx/Δy (deg)	Δt (hr)	ΔPrp	ΔST	
	West	East	South	North						
Level 1	-83.33	+20.83	0.00	75.625	1.0 / 1.0	.833/ .625	6	900	900	Deep
Level 2	-82.00	-58.00	22.00	48.00	.25 / .25	.25 / .25	.083	400	400	Shallow
Level3 Wnd	-78.00	-66.00	36.00	45.00		.125 / .125	.083			
Level 3N	-78.00	-66.00	38.00	45.00	.083 / .083			200	200	Shallow
Level 3C	-78.00	-73.50	36.00	41.00	.083 / .083			200	200	Shallow

\*Shading reflects changes from Evaluation (see Table 5-1) to Production.

The simulation of the 100 extreme extratropical and 1050 synthetic tropical events during the production phase of the Offshore Wave Generation for NACCS was initiated. The WAM simulations were purposefully run independent of the CSTORM Workflow and were treated as input similar to the wind and pressure fields. Under this paradigm the WAM simulations were to be completed far in advance of the start of the CSTORM processing.

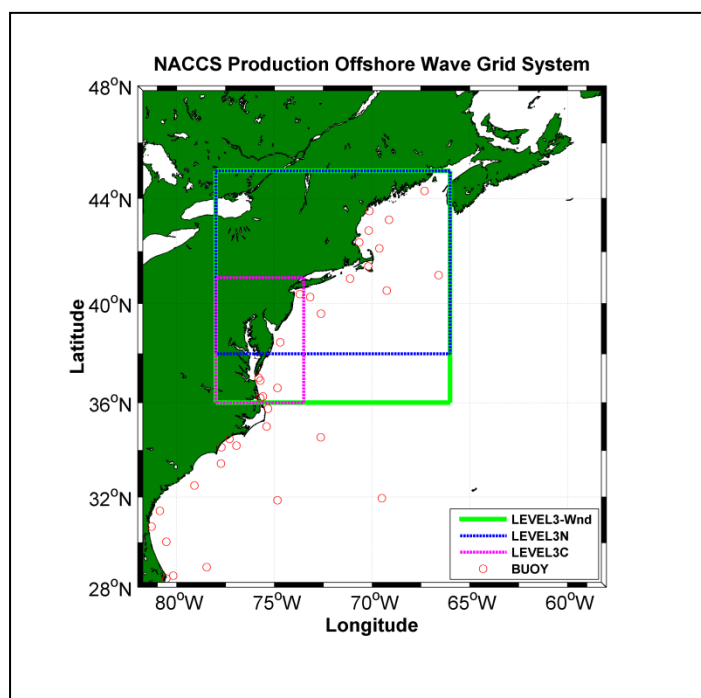


Figure 5-22. WAM multi-level grid system used in NACCS Production. Note Level 2 covers the entire domain illustrated, (compared to Figure 5-5 displaying evaluation test grid systems).

The procedure was automated to maximize the utility of the computational platform while minimizing wall clock time and staff support. All general input files derived from the evaluation tests were used in the production phase. These included the WAM specific general input files (including post-processing), and the grid/bathymetry file. For the NACCS offshore wave climate generation the WAM frequency range was defined by:

$$f_{n+1} = 1.1 \cdot f_n \text{ where } f_0 = 0.03138428\text{-s}^{-1} \mid n=1, 28$$

$$\theta_m = 7.5 + 5.0 \cdot (m - 1) \mid m=1, 72$$

and identical to that used in the evaluation tests.

Sets of wind fields were uploaded and the system was initiated. For the 100 extratropical extreme storm events the WAM Level1 was run, dropping boundary condition (two-dimensional wave spectra) every 900-s. Upon completion of the Level1 storm simulation, Level2 was initiated building boundary condition information every 400-s for Level3N and Level3C domains. Once Level2 completed, Level3N and Level3C commenced where boundary condition information (see Figure 5-7 for the STWAVE locations) was created. When Level3N and Level3C completed the post-processing phase of the storm simulation was started. Output files consisting of fields, defined as integral wave parameters (height, period, direction for total, wind-sea and swell components) at each active grid point in a given region was created. Point-source integral wave parameters were also saved at wave measurement sites and two-dimensional wave spectra. The naming convention of all files followed the construct defined by the NACCS Workflow procedures defined prior to the production phase of the NACCS. The STWAVE boundary condition information (two files) were created and made accessible for the ensuing STWAVE simulations. The raw binary files were tarred and automatically sent to the Mass Storage Facility for permanent archiving also defined by the NACCS Workflow construct. In addition a set of files (online, spectra and field files) were automatically transferred to local computer platforms for QA/QC processing. Final graphic products, color contour of the Maximum and Mean Wave Height envelopes were generated and evaluations performed. The graphic products were reviewed for consistency and quality assuring the WAM simulation performed correctly. On a daily basis summary information was transmitted to the NACCS working group identifying all runs completed and checked so that the progress under the CSTORM Simula-

tion would not be impeded. For each simulation a total of eight Mean/Maximum color contour graphics were generated for each of the four WAM domains (Level1, Level2, Level3N and Level3C). Graphic products were also generated to evaluate the STWAVE boundary condition input for each of the nine grids defined in the coastal region of NACCS. For each active measurement site (see Table 5-4) residing in a given region, three graphic products were produced. The synthetic tropical event simulations were handled differently and will be summarized in the next section.

To illustrate the similarities and differences between the 100 extreme extratropical events<sup>1</sup> the overall maximum (derived from the maximum wind speed and maximum wave height envelope graphics) wind speed and  $H_{mo}$  values are plotted as a function of storm number (examples are shown in Figure 5-2 and Figure 5-3). All three levels (i.e. Level1, Level2, Level3N and Level3C) estimates are shown in Figure 5-23 where the upper panel contains the maximum wind speed estimates and the bottom panel displays the maximum significant wave height estimates for the 100 extreme extratropical event simulations (eight-day storm length).

Evident from Figure 5-23 is a fairly consistent packet of maximum wind speeds from about 20- to upwards of 40-m/s. Proceeding from the large-scale domain of Level1 (L1), into Level 3N and 3C (target NACCS area of interest) the maximum winds tend to range between 20- and 30-m/s. The vast majority of the Level1 wind speed maxima occur in the upper north Atlantic, where the N' Easters track, or where tropical events dissipate and re-form into large, intense extratropical systems migrating in an easterly direction toward the United Kingdom and the European coast. Differences between the Level2 (L2) and Level3N (L3N) and Level3C (L3C) are generally modest, indicating the intensity and magnitude of these storms are preserved from the offshore domain to the coastal area defined by NACCS. However in general, results derived from Level3C are generally lower caused in part by the domain size relative to the other three regions. Based on these results it is evident that relatively intense extreme events were selected appropriately.

---

<sup>1</sup> Note that three original storms ET\_0003, ET\_0009 and ET\_0071 were replaced with ET\_0101, ET\_0102 and ET\_0103. The original events indicating high surge was caused by a rain event and outflow past various water level gauges.

The model estimates of  $H_{mo}$  maximums range from 5- to slightly over 20-m (primarily derived from Level1). Influence of these Level1 events will at best transport low frequency energy into the NACCS domain, assuming the wave directions are translating from the proper quadrant. There are at times when the Level 1 and Level2 coalesce toward similar values (e.g. the *Perfect Storm*, October 1991, ET\_0058; January 2000) indicative of a western Atlantic Coastal storm. This is also true comparing the Level2 with Level3N and Level3C results. This occurs at ET\_0068 for the Storm of the Century in March 1993, where the maximum  $H_{mo}$  estimates in Level3N are nearly identical to that in Level2 of 15- to 16-m. These results persist throughout the extreme storm record length where Level3N is in close agreement (slightly less) to the Level2  $H_{mo}$  estimates. The Level3C maximum wave height estimates are generally lower than other levels, akin to the wind speed results. Overall, the range in results from Level3N and Level3C is variable and consistent with estimating the wave climate for extreme extratropical events.

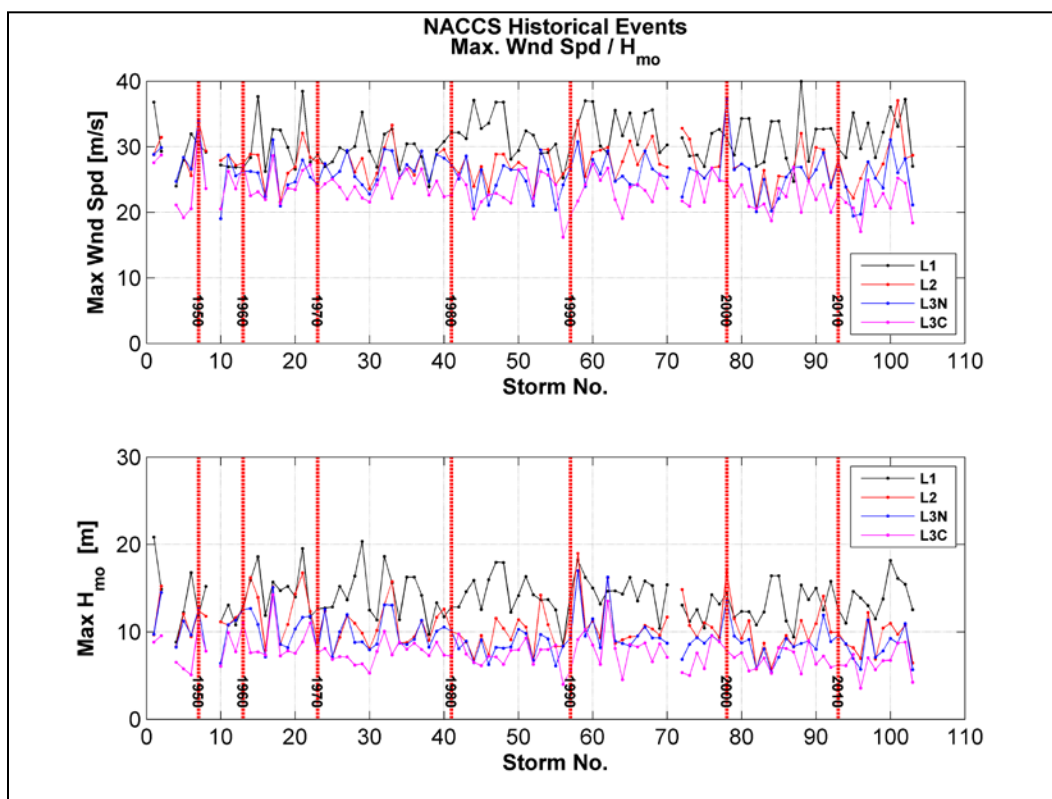


Figure 5-23. Maximum wind speed and  $H_{mo}$  estimates for 100 extratropical historical storm simulations. Decades are indicated by the red vertical lines.

The spatial variation of the maximum wind speed and significant wave height estimates are shown in Figure 5-24. The 100 extreme extratropical event results are plotted; however some locations will have multiple entries. The wind speed maximums fall in the offshore region which is not that surprising considering how spatially large these storms can be and the relative slow forward motion of the storms. There are, however, many cases falling along the seaward boundaries between the Level2 and Level3 domains. In addition there are a few cases in Level3N and Level3C where the wind speed maxima are located at or relatively close to the land/water boundary. Considering these events are dominated by Nor 'Easters, there seems to be a strong southwest to northeast distribution of the wind maxima. For the significant wave height maxima, there is a much different distribution. It is apparent that the significant wave height maxima do not correspond in space as much as they do in time (illustrated in Figure 5-23). There is generally a temporal phase shift between a wind speed maximum and  $H_{mo}$  maximum at a point location. Hence, the maximum wave height location may or may not reflect the forcing function derived from the maximum wind speed (i.e. a one-to-one correlation between the peak wind speed and the peak wave height). The majority of maximum  $H_{mo}$  estimates fall on or in close proximity to the boundary between Level2 and the two Level3 domains. This is an indication that both Level3N and Level3C maximum wave climate is a result of wave energy entering the region and rapidly attenuate, rather than continue to grow under the wind forcing. However there are some cases where local generation occurs. The pockets of maximum wave heights in the near the coastline reside in the Gulf of Maine, and offshore of the New Jersey-Maryland,-Virginia-North Caroline coastline. There is a void of  $H_{mo}$  maxima south and east of the south shore of Long Island and continues to east of Cape Cod. This is the transition region for many of the Nor 'Easters, where they would attenuate and track well to the east or amplify, lift up in a northeasterly direction, or become trapped (high pressure block to the north). In the latter case, the winds will continue to blow in a counterclockwise direction, local wind-seas would continue to develop off the northwesterly quadrant, while to the south of the low pressure system radiate the swells southeast and eastward.

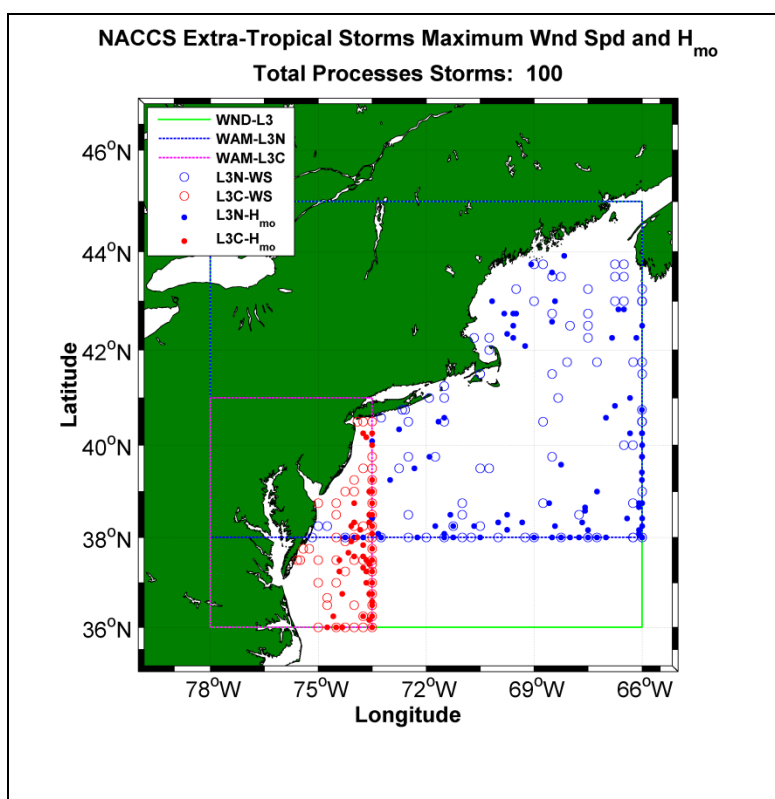


Figure 5-24. Location of wind speed and significant wave height maxima derived from the 100 extreme extratropical simulations.

During the production of the 100 extreme extratropical storm event simulations, the evaluation of WAM continued. All graphic generation (time, scatter Q-Q plots), and statistical testing was performed at all point-source wave measurement sites in all three model production levels. This continued until there were no available measurement sites. This is illustrated in Figure 5-25, where the Storm number is labeled along the abscissa and the number of point-source sites labeled along the ordinate. Any storm simulation below ET\_0040 (Storm 40 in Figure 5-25) has no point source measurement sites available and no evaluation can be performed. For all extratropical storm simulations the Level3C domains contains no more than four sites compared to a maximum of eight in Level3N. This limited population size will have an impact on the overall assessment of WAM and posed in that context. The limited data used for comparisons also contains the FRF Waverider and as previously noted could not be sufficiently co-located in the Level3C grid domain, producing false negative results. Lastly, the evaluation testing was based on simulation lengths (i.e. initiated at least one month prior to the storm maximum) that were considerably longer than the extratropical extreme event durations of 8-days (-4-days : 1-day : +3-days). Despite comparing the number of evaluation storm

events (22) versus the extreme extratropical events (100, about 60 containing data) used in the production, the actual number of time-paired observation to model results can be similar. This was the case for Level3C evaluation where the number actually decreased by about 2,000.

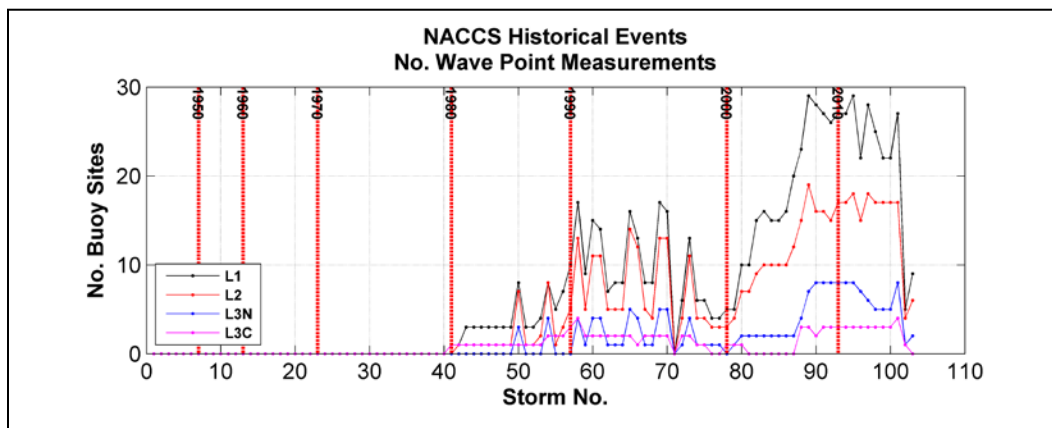


Figure 5-25. Number of point-source measurement sites available during the production of the 100 extreme extratropical storm events. Decades are indicated by the red vertical lines.

The Level2 WAM results from the 100 extreme extratropical storm simulations are presented in Figure 5-26. The results should generally emulate that found in the evaluation testing because most if not all storms are incorporated in the extreme storm population. The number of time-paired observation/model results compared to the evaluation test set increased by approximately 40,000 (see Figure 5-19), and the peak  $H_{mo}$  results increase by about 4-m (bin average, upper left panel). The bin average plot indicates a region where WAM is negatively biased (from 5- to 7.5-m), that is more obvious than in the evaluation testing. This is contrary to a visual inspection of the cloud of results appearing to be greater than the 45-deg line. It is more obvious for conditions greater than about 10-m, however the population size is restricted to a very small population size. The color contour plot is similar to the results derived from the evaluation tests. The WAM results generally fall within the 95-percent confidence bands, and the linear regression (slope of 0.964) is slightly better indicating about a 3.6-percent negative bias over the mean (actually -0.13-m shown in the lower right panel). These errors reflect the persistency in WAM slightly under estimating the large population (red color contours) of low wave conditions. As the wave heights increase there is a near uniform distribution of relative errors above and below the 45-deg perfect fit line. The Q-Q analysis and graphic (lower left panel) clearly demonstrates the reliability in WAM estimating the entire wave height distribution found in the point

source measurements. This includes up through the 99.99<sup>th</sup> interval for wave heights of 8.75-m. The last 1-percent has not been accounted however based on the bin-average WAM does show a slight over estimate (about 1-m) of the peak conditions for  $H_{mo}$  values above 10-m.

The Taylor diagram (multiple statistical tests presented in one graphic) provides a very good representation, and reflects the quality in the WAM results for the 100 extreme extratropical events (note that there are about 60 events containing wave measurements). The RSMS generally falls below 0.5-m, and the correlation is between 0.90 to 0.97 signifying quality in the model estimates. The normalized  $\sigma^2$  estimates are between 0.75 and 1.25 suggesting the scatter in the model emulates that of the measurements. This is true for all but three points (individual storms) that show slightly less quality, where the RMSE falls above 0.5-m, and the correlation coefficient is near 0.80.

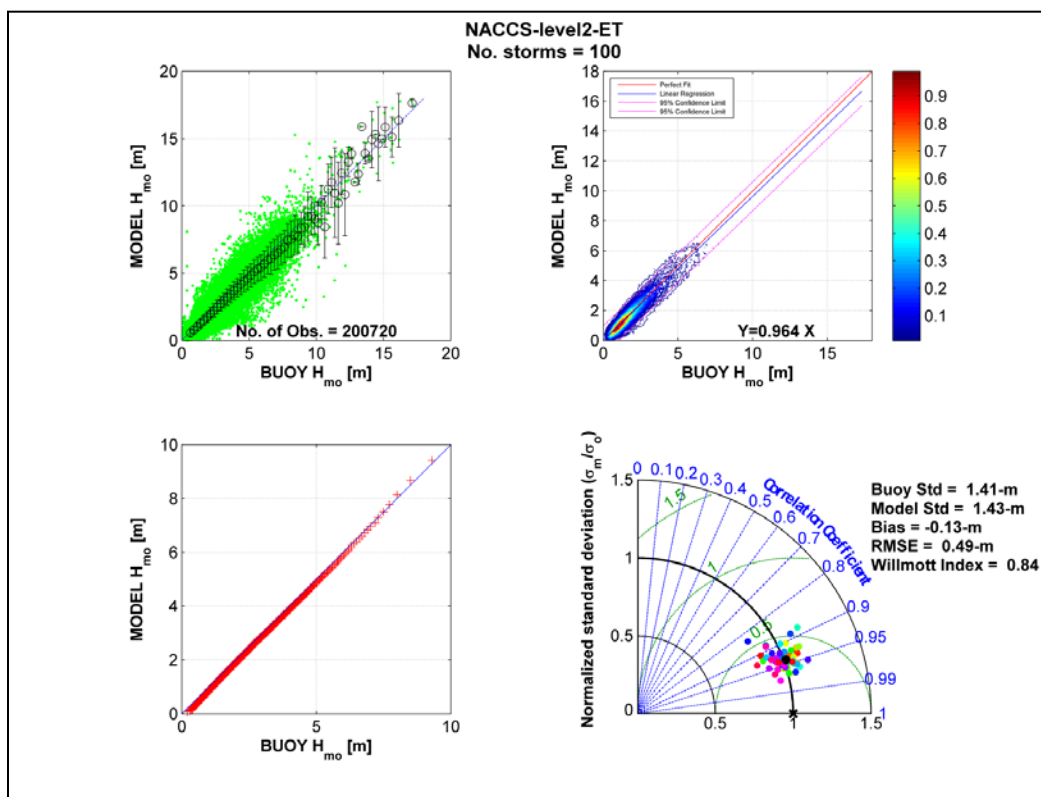


Figure 5-26. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level2 results derived from the 100 extreme extratropical storm events.

The Level3N summary results are displayed in Figure 5-27. With the additional storm simulations, the bin-average (upper left panel) there is an increase in scatter above and below the 45-deg line of perfect fit, but appears to be relatively uniform. However the binned mean  $H_{mo}$  model results diverge from the perfect fit around 5-m. These results are derived from one storm event (ET-0061-08, the Storm of the Century, Cardone et al., 1996) where an emerging northeaster entered the Level2 domain early into the hindcast. Wave measurements from multiple sites were on the order of 6- to 7-m compared to WAM estimates of 2- to 4-m generating the obvious under estimates (lack of sufficient spin-up in the L2 domain). WAM did relatively well at the selected storm of 6-m later in the simulation. With the limited population size, WAM does replicate the peak storm wave heights (> 12-m) rather well. The overall quality in the WAM estimates (upper right panel) is provided in the color contour plot, where WAM estimates run about 7.5-percent lower than the wave measurements.

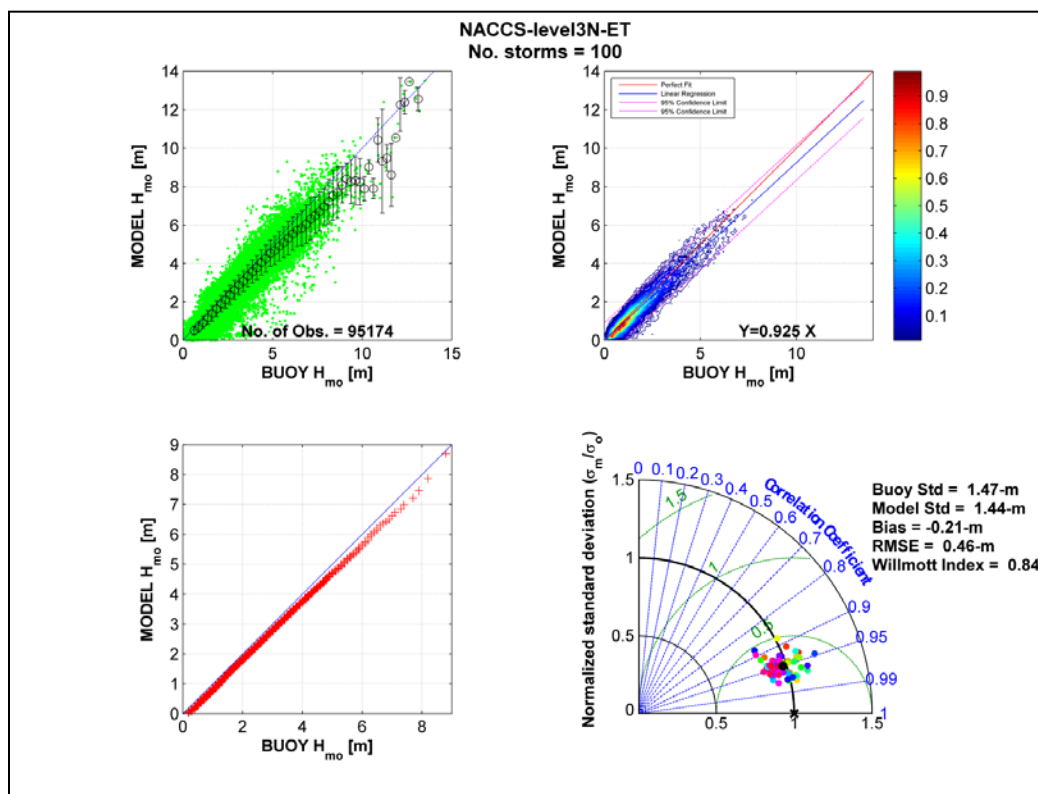


Figure 5-27. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level3N results derived from the 100 extreme extratropical storm events.

As found in the Level2 results the Level3N WAM estimates fall within the 95-percent confidence limits for the wide range of wave conditions in the

100 extratropical extreme events. It does appear the majority of these errors reside in under estimating the low  $H_{mo}$  conditions (i.e. < 2-m) indicated by the red region falling below the perfect fit

The Q-Q analysis (Figure 5-27, lower left panel) reveals the trend found in the bin average and color contour diagrams. For low significant wave heights (< 2-m) WAM tends to under estimate these conditions. This under estimation increases slightly through the remaining range in the wave climate. However, this error is only about 0.25-m at its maximum, or about 3-percent for wave heights of 8-m. The last analysis, displayed in the Taylor Diagram (lower right panel of Figure 5-27) summarizes the previous results. The overall bias for the 95,000 time paired observations is -0.21-m, with a RSME of 0.46-m and Correlation generally falling above 0.9 a good indication of the quality in the WAM estimates compared to multiple storm scenarios, and multiple locations. These results would be improved if only the selected storm period of record would have been used, essentially eliminating evaluations based on the spin-up deficiencies previously noted existing in the Level2 and Level3N regions.

The Level3C domain WAM evaluation results are provided in Figure 5-28. As previously indicated the number of wave measurement sites compared to Level2 and Level3N are much lower (Figure 5-25). Hence, the results will not indicate the true quality in the WAM estimates especially at locations such as the FRF WaveRider (the longest wave record of all measurement sites) where there were issues of co-locating the WAM estimates to the true buoy site. The bin-average scatter plot (upper left panel, Figure 5-28) display a lower overall wave climate relative to the Level2 and Level3N domains, where the maximum recorded wave height is on the order of 8-m (compared to 17-m and 12-m for Level2 and Level3N, respectively). This may in part be attributed to the number of sites available, the relative size of the domain or a natural condition. There is also a larger scatter in the WAM results and lie above the line of perfect fit. However over the binned-means WAM performs well until about 5-m where there is a tendency to under estimate  $H_{mo}$  conditions. The model errors (given adequate population size) are about -0.25-m and acceptable for these types of simulations. The distribution of the 34,000 time-paired observations (upper right panel, Figure 5-28) display a similar trend in the WAM results found in the scatter plot. There is a tendency for some contours to fall outside the 95-percent confidence limits for wave heights between 2- to 4-m, however the overall match of WAM to the measurements is approximately 5.5-

percent low. The majority of these errors (yellow to red colors in distribution) again reside in the low  $H_{mo}$  range ( $< 1.0$ -m) where WAM consistently under estimates. These results are also evident in the Q-Q analysis where the data fall below the line of perfect match for significant wave heights less than 1.0-m, follow the line up to about 3.5-m where again there is a small under estimation and finally track on the line, or at the extreme case ( $> 7$ -m) is slightly high. The Taylor diagram (lower right panel, Figure 5-28) displays a much larger scatter in the WAM results compared to Level2 and Level3N. The scatter is mainly attributed to the population size of time-paired model and measurements; the inability to co-locate the FRF WaveRider site in the WAM grid. These two conditions tend to drive the analyses producing sub-standard results. The five greatest outliers shown in the Taylor diagram (Correlation  $< 0.9$ , and RSME  $> 0.5$ -m) are based on the limited sites for the evaluation, or were based on only the FRF WaveRider data. However most of the WAM results for Level3C do fall above a Correlation of 0.9, a RMSE of 0.5-m and normalized  $\sigma^2$  between 0.75- and 1.25-m. The overall bias was -0.14-m with an RMSE of 0.42-m very similar to results found in Level2 and Level3N.

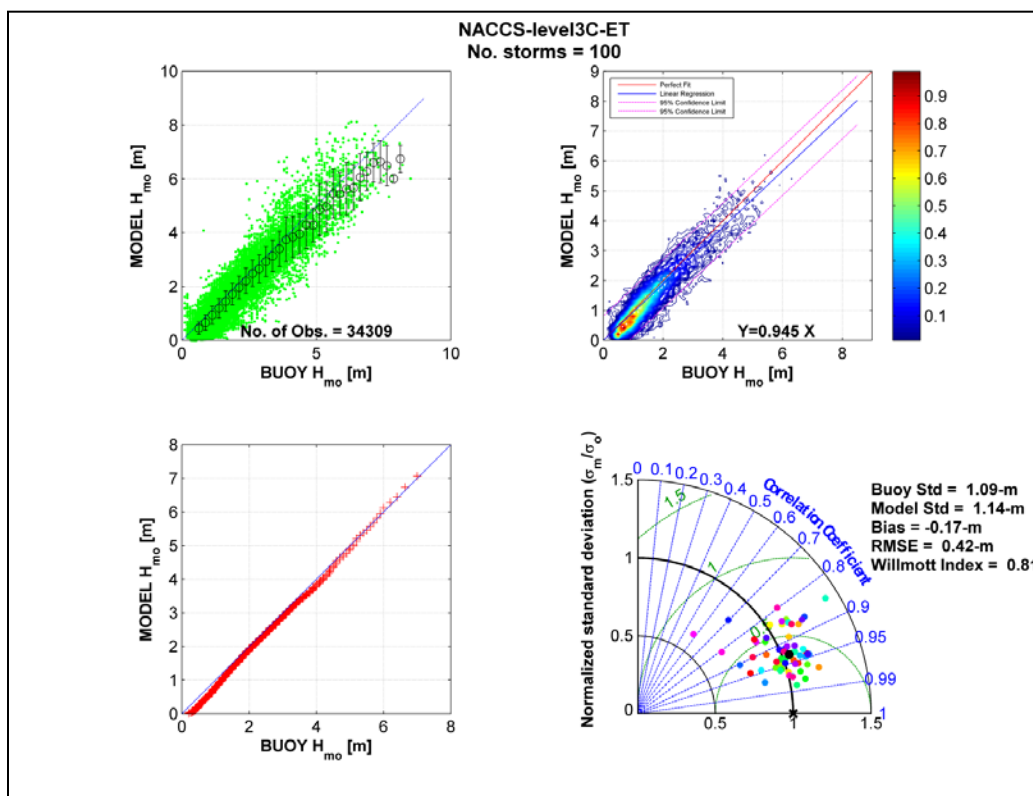


Figure 5-28. Bin average scatter diagram (top left), color contour (top right), Quartile-Quartile plot (lower left) and Taylor diagram (lower right) for WAM Level3c results derived from the 100 extreme extratropical storm events.

In summary, a total of 100 extreme extratropical events were simulated using a multi-level WAM grid system. Evaluations of WAM were performed for about 60 of those storm events to upwards of 30 measurement sites along the Atlantic coast (Level2) and in the NACCS domain (Level3N and Level3C). The summary of results indicated that in general WAM performed well for the extreme storm events where measurements were available. The overall trends showed high quality given sufficient data for the evaluation. Only when there were limited point-source sites available, or in some cases pre-emerging meteorological events prior to the designated storm peak where the WAM results become outliers. Otherwise the WAM estimates for the extreme extratropical simulations selected in the NACCS produced high quality results.

## **5.8 WAM Production 1050 Synthetic-Tropical Storm Events**

As in all wave modeling applications, accuracy in the wind field specification is the most critical factor influencing the quality of the resulting wave estimates. The wind fields used in this phase of the project were generated from a Planetary Boundary Layer Model (Thompson and Cardone, 1996), solving the vertically averaged equations of motion subject to horizontal and vertical shear. The model is an application of a theoretical estimate of the horizontal airflow in a boundary layer of a moving vortex. The model (TC96) has been used successfully for the past four decades in the generation of wind fields (and pressure fields) resulting from a tropical storm system. This methodology has been successfully used in the construction of all Wave Information Study wind fields used in its long-term wave hindcast effort; in the Interagency Performance Evaluation Task Force's Report on Hurricane Katrina and follow up studies by the USACE ERDC and the Federal Emergency Management Agency work on the Louisiana, and Texas coasts. For the NACCS production of the synthetic storm events, these are the only meteorological systems occupying the model domain and the results should be evaluated in the manner the wind fields were generated.

The 1050 storm events consisted of sets of storms with one of four land-falling track headings; two bypassing track headings, variations in central pressure deficit ( $\Delta p$ ), storm speed ( $V_f$ ), and radius of maximum winds (RMW) along the track. Note that  $\Delta p$ ,  $V_f$  and RMW were held constant along the storm track until pre-land fall filling would occur. A pre-land fall filling value was selected and based on an assessment of forty-five historical storm events defined in the NACCS domain. The pre-landfall filling

takes place approximately 250-km from the point of landfall. For the bypassing storm set use constant  $\Delta p$ ,  $V_f$  and RMW values and apply a post-region filling over the ocean were defined along the storm track. In the special cases of bypassing storms which make landfall prior to entering the NACCS domain the Joint Probability Method parameters were specified at and prior to landfall and then apply the Vickery (2005) post-landfall filling model. Three regions (see Figure 5-29) were pre-selected for the construction of the synthetic tropical storm events and designated for unique track spacing. These regions are defined by:

- Region 3 36.5-deg to 39.0-deg
- Region 2 39.0-deg to 41.5-deg
- Region 1 41.5-deg to 45.0-deg

The entire WAM production effort was separated from the CSTORM-MS operational system. The generation of the offshore boundary condition wave estimates (two dimensional spectral estimates provided at fifteen minute intervals along the nine offshore STWAVE domains) were to be treated as input (as in the case of the wind and pressure fields) to the CSTORM-MS production system. This required as many WAM simulations to be performed prior to the CSTORM-MS system was initiated. There was no lag time encountered during this procedure as the WAM simulations were completed well in advance of the CSTORM-MS production need for the required WAM boundary condition files.

The production for the 1050 Synthetic tropical storm events varied slightly from the extratropical simulations. The first difference restricted all storm events to be contained in the Level2 (and for the WAM simulations the Level3N and Level3C grid) domain. The second and more obvious change was to remove the evaluation step in post-processing (i.e. model to measurement tests performed). During the simulation of these events the WAM results were QA/QC to visual inspected the maximum and mean wave height and wind speed envelope graphics for consistency (eight graphical products). Boundary condition wave estimates used to drive the STWAVE model simulations were also evaluated graphically to assure the results derived from WAM were consistent with the forcing conditions. Upon completion of the QA/QC, the results (i.e. the boundary condition files) were saved for the CSTORM-MS simulations. All other output files were merged and archived on the ERDC HPC Mass Storage Facility.

An assessment of the WAM results for the 1050 synthetic tropical events is provided below. The information presented summarizes the maximum conditions generated for these storms, the relative location of these conditions, and to what degree do Level3N and Level3C compare to the Level2. Placing these storms in the context of real events the following are maximum wind speed estimates<sup>1</sup> occurring the life cycle of each event.

• 2012	SuperStorm Sandy:	46 m/s
• 2011	Hurricane Irene:	54 m/s
• 2003	Hurricane Isabel	72 m/s
• 1996	Tropical Storm Josephine	31 m/s
• 1991	Hurricane Bob	51 m/s
• 1985	Hurricane Gloria	64 m/s

The assessment as previously indicated is based on overall maxima for a storm event. These results were derived from the maximum wind speed and maximum significant wave height envelope generated during the QA/QC evaluation process. The values represent the overall maximum condition that was generated at any grid point in the WAM domain for the duration of each storm simulation. Figure 5-29 is a graphic presentation of the maximum wind speed (top panel) and the maximum  $H_{mo}$  estimates for the 1050 storm events. The lines are color coded for the Level2 (black), Level3N (blue) and Level3C (red) results. The vertical lines indicate the various classifications of storm events and land-falling position relative to the three Regions pre-selected in the initial generation of the events. Also the regional storm systems were sub-divided into land-falling and by passing storm scenarios. Last, for each of the sub-sets there are track numbers starting at a southern point and progressing in a northerly direction.

For the conditions presented in Figure 5-30 the Level2 maximum wind speeds are generally higher compared to the Level3N and Level3C results. Level3N winds tend to be higher than Level3C. The variation (low to high wind speeds) fall in the range of the tropical storm maxima listed above. Hurricane Isabel's maximum wind speed was located further east of the Level2 domain, and varied between 45- to 51-m/s once inside the Level2 boundaries. The bulk of the maximum wind speeds fall between 25- to 50-

---

<sup>1</sup> Wind speed estimates were found on <http://weather.unisys.com/hurricane/>

m/s with a few storm conditions containing winds in excess of 60-m/s consistent with historical storms affecting the NACCS domain.

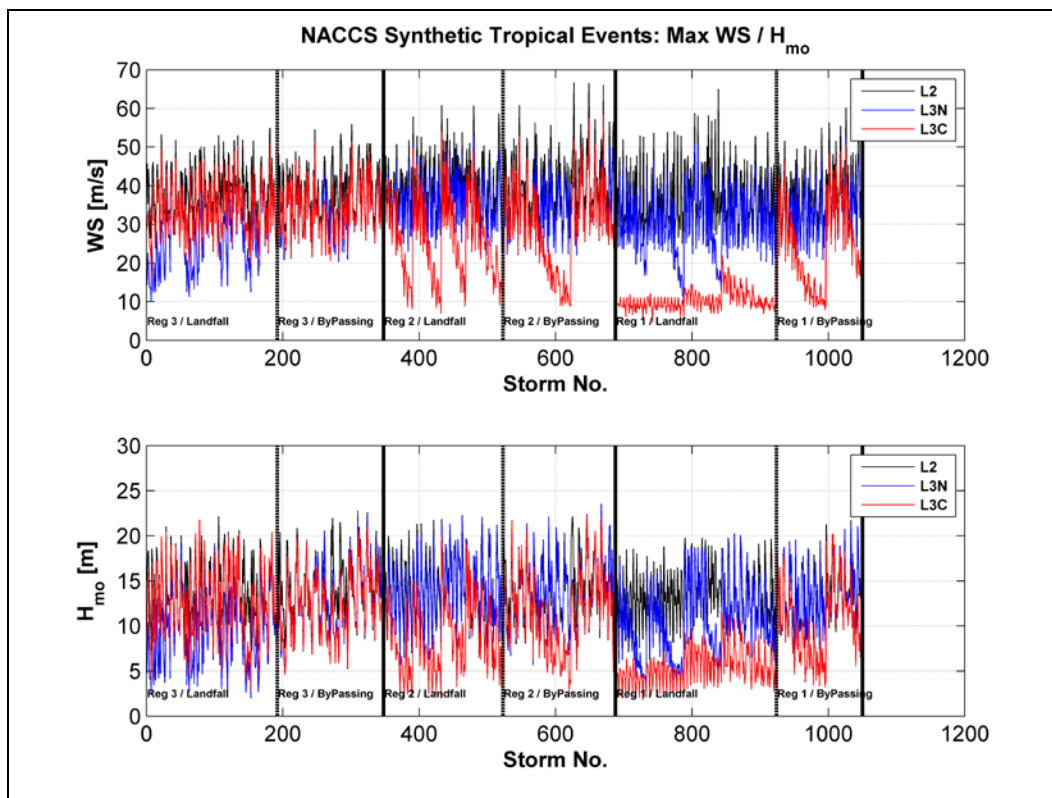


Figure 5-29. Overall maximum wind speed (top panel) and maximum significant wave height (bottom panel) estimates for each of the 1050 synthetic tropical storm simulations for the NACCS.

Level3C shows greater variability in the maximum wind conditions for nearly all sub-sets (by Region, land-falling or by-passing), and is highly dependent on the track number and angle of attack at landfall. The reasons are straightforward. There are three primary reasons for large gradients in the maximum wind speed trace. It is the relative position of the Level3C domain; it is located in the southernmost area of the NACCS. Second, tropical systems and their accompanying wind fields rotate counter-clockwise, with the core of the maximum winds of each storm located in the right front quadrant. This means for any track the maximum winds would fall to the right side of the track's position. The synthetic tropical systems are organized by type, (land-falling or by-passing), by region and by track. For all cases in the population there will be one unique track that falls to the north of the Level3C domain (see Figure 5-22) and the maximum wind speed would fall further outside the defined area. Figure 5-29

reflects these conditions where the large gradients (functionally related to the storm) in wind speeds occur in Region 2 and Region 1 (for Level3C). These gradients occur but to a limited extent for the Level3N model grid as found in Region 3. There is a similar pattern (storm dependent gradients) of Region 1 and Level3N winds where there are sets of storms with decreasing wind speeds as the new storm track location is translated in a more northerly position until it hits the Level3N northerly boundary. Geographical considerations (protrusion of Cape Cod to the east), storm track position, and tropical system parameters (e.g.  $\Delta p$ ,  $V_t$ , and RMW) for land-falling systems occurring in Region 1 will nearly eliminate any wind forcing effect on the Level3C domain.

The results from by-passing tropical systems generally emulate the conditions found in the land-falling systems. By-passing systems residing in Region 3 are *well behaved*. Maximum wind speeds for all three model domains (Level2, Level3N and Level3C) are very similar in magnitude. There are limited cases where the Level3C results depart from the other two domains. The storm tracks generally follow the coastline and will have a net impact on all three of the wave model domain. The sequencing of the individual storm tracks now runs from north to south, and west to east. As Figure 5-29 (top panel) indicates, the variation the storm track location is nearly invariant on the maximum wind speed magnitudes. The by-passing storms for Region 2 again show a variation in maximum wind speeds observed in the Level3C domain. The storm tracks for these by-passing events translate from west to east and eventually falling outside the eastern boundary of the Level3C domain, and thus resulting in a low maximum values (about 10-m/s). The return of the storm track position to the western edge of Level3C occurs at TP-0624-06 reflected by the step increase in the wind maximum. The Level3N results remain generally unaffected by the tropical storm track position because of the wider expanse of the domain. A similar trend exists for by-passing events in Region 1. The results reflect the track position relative to the Level3C domain that was evident in the Region 2 storm set. The initial storm track is positioned near the Atlantic coast (TP-0925-04). Each successive storm track moves in an easterly direction through TP-0996-02) and then repeats the sequence again starting along the Atlantic coastline. The results from Level3N again show very little changes over the track position sub-set. Maximum winds vary between 20- and 40-m/s for Level3N while the Level3C results observe winds as low as 10-m/s.

Scaling principles (Phillips, 1957) state that the significant wave height is proportional to the wind speed squared, hence the results found in Figure 5-28 (bottom panel) should emulate the maximum wind speed variations. In part this is true. For increasing wind speed maxima the  $H_{m0}$  maxima follow a similar trend. As wind speed maxima decrease the significant wave height decreases. There is an added component of the wave field that will also affect the coastal reaches of NACCS. The complexities of mapping the wave climate in the presence of a tropical system have been precisely measured (Walsh, et al. 2002) showing migration of swell energy across the core of a tropical system.

Certain variables of a tropical storm system are important in the development of the wave field; the wind speed, the forward speed and the storm track. Local wind-waves are developed by the existing wind fields. There is a dynamic balance between the atmospheric input ( $S_{in}$ ) the transfers of energy (downshifting in the frequency range) by the non-linear wave-wave interaction ( $S_{nl}$ ), and white-capping or dissipation ( $S_{ds}$ ) occurs when the energy level exceeds a threshold and breaking will commence. This will continue however if the phase speed of wave systems exceed the wind speed the relative energy will then be transformed to swell. As this is taking place the storm is moving at a given forward speed. As the tropical system translates along a given storm track energy will escape from the system because its group speed is greater than the system's forward speed. There are occurrences when the translation speed of the storm system matches the group speed. When this occurs the local wave climate will continue to develop and potentially become trapped or saturated (e.g. Pierson and Moskowitz, 1964; Resio et al. 1999). Extratropical systems have similar characteristics representing the local and distant wave field, however tropical systems are smaller, fairly well defined, are more rapidly moving and contain wind speeds of higher intensity.

There are similarities in the  $H_{m0}$  maxima as observed in the wind speed maxima for the 1050 synthetic tropical storm simulations. For the land-falling conditions in Region 3 the similarities are apparent; Level3N wave estimates are lower for lower wind speed maxima, and Level2  $H_{m0}$  results increase and decrease with the winds. Results from the Level3C maximum significant wave heights in general follow the winds, however at times they do exceed the results from Level2. The wave energy is carried further into this region with a combined effect of the local wind-seas surrounding the tropical storm core and the swell energy radiating outward toward the

coast. For Region 2 a similar situation exists for the land-falling events however the roles of Level3C and Level3N are reversed. Level3C maximum  $H_{mo}$  conditions follow the wind speeds. When individual storm tracks translate further to the northern Level3C boundary the wave heights will diminish. Level3N maximum significant wave heights despite lower wind speed maxima at times meet or exceed the results from Level2. The similarities persist in the Region 1 land-falling storm set. The Level3C domain  $H_{mo}$  conditions are nearly a factor of three lower than what is observed in Level3N. There is an observable decreasing trend in the significant wave heights in the Level3N results compared to its wind speed counterpart. The decrease in the wave heights is a result of the individual storm track position running into the Level3N northern and eastern boundaries reducing the capability of any local wind-wave generation. For the by-passing events the  $H_{mo}$  trends are similar to the winds. Occasionally the Level3N wave heights equal to or exceed the Level2 conditions. These tracks are slightly offshore and follow the coastline so that wind-wave generation will continue until the event makes landfall along Nova Scotia, Canada. In all cases, the results shown in Figure 5-29 follow an expected pattern for the types of conditions simulated. All of the outlier events results were explained by either geographical constraints or by the bounding boxes defined by the Level3N and Level3C domains relative to the storm track positions.

The second summary graphic (Figure 5-30) displays the geographical location of the 1050 wind speed and significant wave height locations. The Level2 grid domain is identified by the magenta box, the three Regions used in the tropical storm event set are defined (horizontal black dashed lines), and the maximum wind speed and  $H_{mo}$  estimates are plotted. One must note, only one point is generated for each synthetic tropical storm event whether multiple locations exist in the domain for that simulation. The tropical winds were based on a moving vortex translating along a given storm track. The winds in the core of the storm system remained constant through the simulation until the filling routine was applied at approximately 250-km offshore from the land-falling location. Hence the wind maxima for land-falling storms will be positioned along the initial storm track starting at approximately 20-deg N Latitude and 40-deg W Longitude. All maximum wind speed estimates follow the initial arch of the storm suite. The distribution found in Figure 5-30 replicates the original input wind field data set.

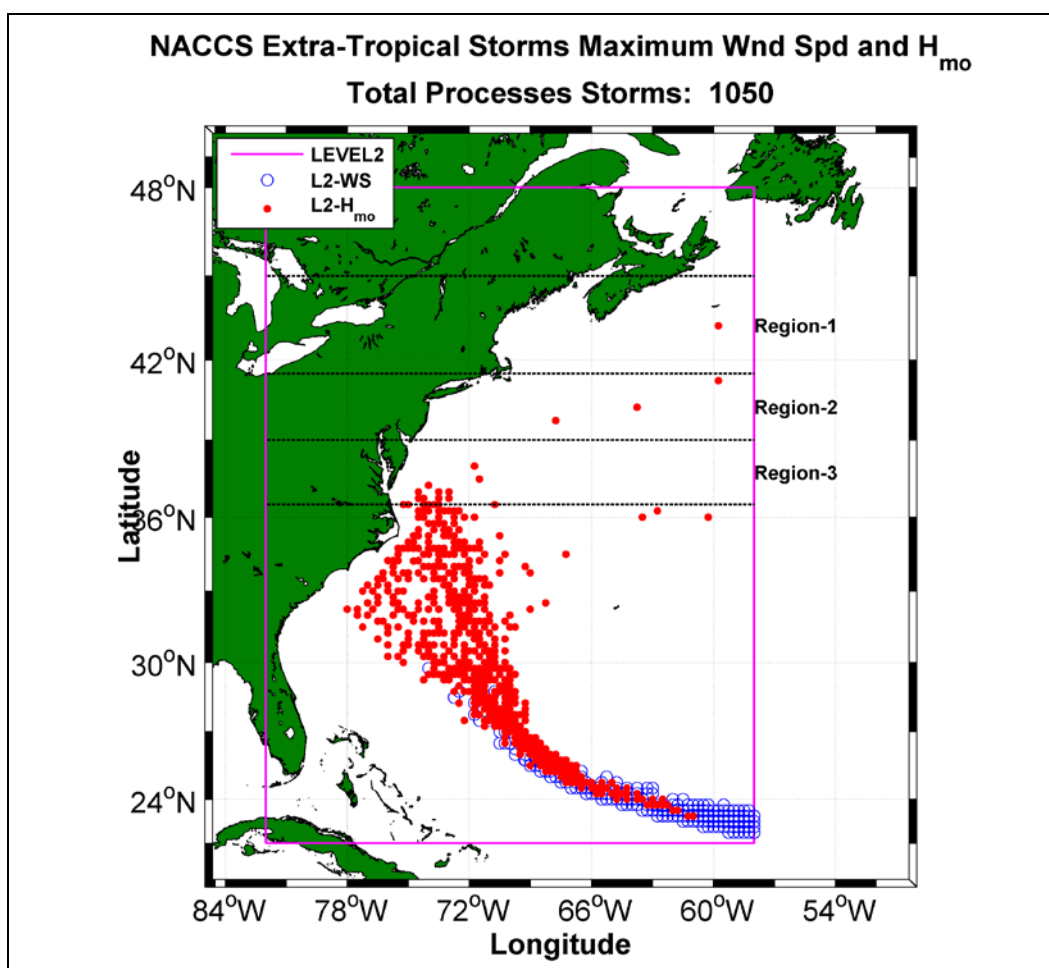


Figure 5-30. Maximum wind speed and significant wave height locations in Level2 model domain for the 1050 synthetic tropical storm event simulations.

The maximum significant wave height locations require additional reasoning. First, nearly all of the designated locations fall well south of the NACCS domain (southern boundary around 36-deg N Latitude). The maximum  $H_{mo}$  estimate locations are based (as in the wind speed) on an absolute value. If there are multiple values contained in the domain for a given simulation only the initial location is tabulated. Hence, if the wind fields are constant over the track position and time it is reasonable to expect these locations to populate into the NACCS region. Secondly, the magnitude of the wind speed falls between 30- to about 65-m/s. For these winds wave heights in wind-wave growth expressions can attain over 20-m as shown in Figure 5-29. Wind-wave growth is occurring from the initial storm track at the initial time step and will continue to grow until the wave field becomes saturated. This is essentially what is occurring for nearly all of the synthetic tropical storm events. The fan shaped pattern found in the

$H_{mo}$  maxima distribution is a result of two mechanisms. The first is the transition of all storm tracks originating at approximately 20-deg N / 40-deg W then following a specified track in an area defined approximately by:

- Southern Boundary: 27-deg N
- Northern Boundary: 30-deg N
- Western Boundary: 74-deg W
- Eastern Boundary: 78-deg W

The turn of the storm system will commence. When this occurs the local wind-seas will transition into swell energy and radiate outward toward the west. These two effects and the location of individual storm tracks will create the fan shape identified in Figure 5-30. Once the tropical system completes its transition to the proper track, local wind-wave growth will continue.

Located in Figure 5-30 are about seven points that appear to be outliers. These results were derived from by-passing storm conditions (Region 3 and 2) or from Region 1 land-falling conditions at -60, and -40 degrees. In order to achieve the latter condition the storm track must arch far to the east to meet the conditions (-40 and -60 degrees) at the land-falling position. Three of the seven events were a product of these conditions, while the remaining four storm simulations were by-passing events.

Similar analyses were performed for the Level3N and Level3C domains. These results are presented in Figure 5-31. The number of symbols may seem low (1050 potential symbols for the wind speed and  $H_{mo}$  maxima). It is because many of the maxima for an event are co-located with other storm simulation results. This is especially true for the Level3C domain. In addition there are a number of maxima residing on the boundaries of Level3N and Level3C (see Table 5-6). This is due to the selection procedure defining an absolute maximum value in the field files generated for a single synthetic tropical storm simulation. In general the storm track initially enters the southern or eastern boundary and the maximum value would be set despite achieving a similar value elsewhere in space and time. In-filling (resulting in a decrease in the wind speed) will occur within 250-km of coastline for land-falling systems. This will reduce the number of maxima residing landward from about 25 grid points in the model domain. More than half of the maximum wind speeds for the 1050 storms

reside on both the Level3N and Level3C boundaries while more than half of the maximum significant wave height estimates for the Level3C region again reside on the boundary.

There is no discernible pattern in the wind speed maxima because most of the population lies along the boundaries of Level3N and Level3C. It is interesting to note that some of the maximum wind speed estimates for particular simulations fall near the coastlines of the NACCS. Most if not all of these locations are from land-falling systems with low heading angles or by-passing systems running parallel to the NACCS coastline.

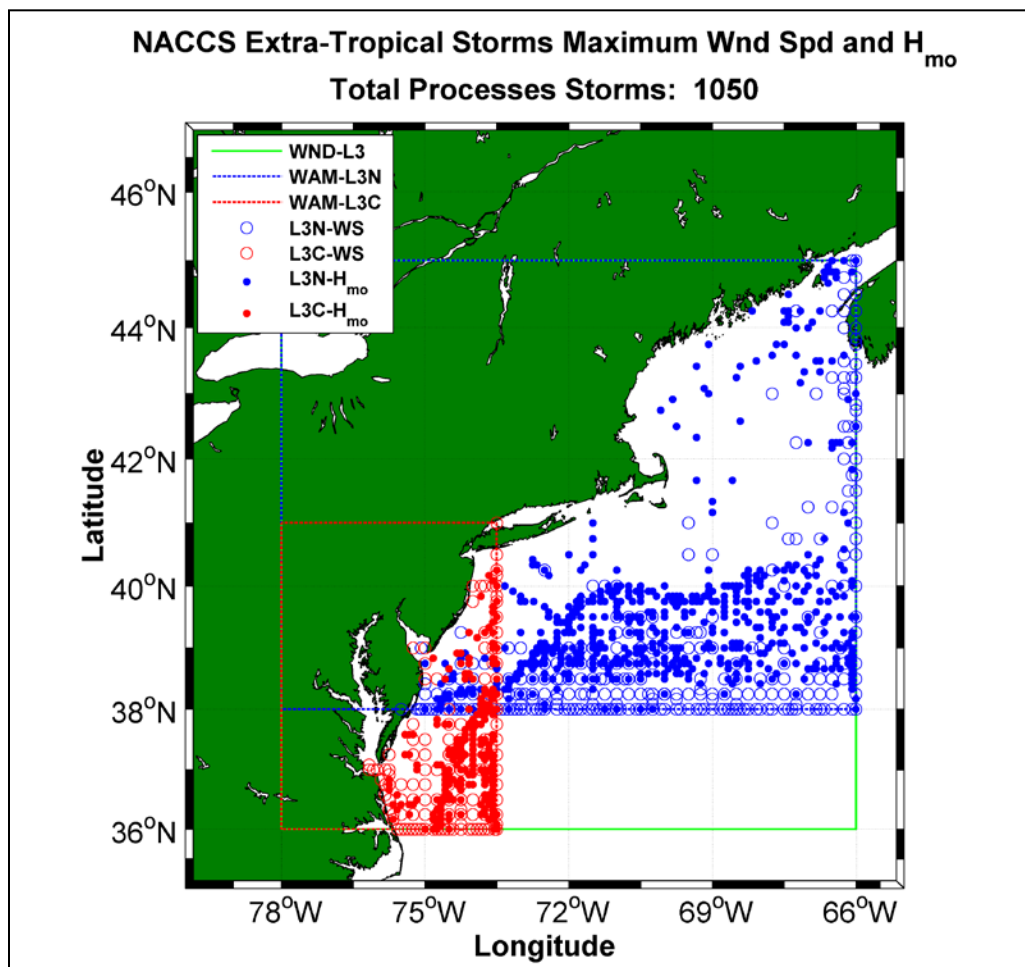


Figure 5-31. Maximum wind speed and significant wave height locations in Level3N and Level3C model domains for the 1050 synthetic tropical storm event simulations.

Table 5-6. Wind speed /  $H_{mo}$  maxima locations.

Domain	Positioned on Boundary		Positioned Inside Domain	
	Wind Speed	$H_{mo}$	Wind Speed	$H_{mo}$
Level3N	666	252	384	798
Level3C	843	666	207	384

The distribution of the  $H_{mo}$  maxima is a different matter. There is an observable pattern in the solid blue and red symbols for the population offshore the NACCS domain. In general there is a large grouping of significant wave height maxima in the southeast corner of Level3N and Level3C. Landward from this cloud there is a well-defined line that extends from Level3C southern boundary to the eastern boundary in the Level3N domain. This *line* approximately follows the 200-m isobaths in the wave model's grid. Landward of this line the water depth decreases slowly, arbitrary water depth effects (phase, group velocities), wave-bottom effects will affect and generally attenuate the offshore wave climate. The patterns in the  $H_{mo}$  maxima from the 200-m isobaths may appear to be random however the relative location of these points fall in areas of deeper water. It is depth effects that control where the maximum significant wave height exist for these synthetic tropical storm simulations in the Level3N and Level3C domains defined in the NACCS.

## 5.9 Summary

The offshore wave climate defined in the NACCS domain is very complex and a result of meteorological events of various scales and intensities passing through the region. Extreme storm events dominated by Nor 'Easters generally occur on an annual basis. These storms on land produce significant rainfall, or massive snowfalls. Offshore it is not uncommon for these events to produce  $H_{mo}$  values in the range of 8- to 15-m. Tropical events also occur but not as often as Nor 'Easters. These events are generally modified by other synoptic-scale systems once they pass Cape Hatteras and continue up the Atlantic seaboard. These systems as in the case of SuperStorm Sandy resulted in large-scale devastation of the coast, and infrastructure. It is also not uncommon for tropical systems passing well to the east of the NACCS domain to have an impact on the coastal environment from radiating swell energy from the moving system. It is necessary to properly estimate not only a tropical system but also embed that system into synoptic- and meso-scale meteorological events. Defining the offshore wave climate under these extreme storm events is a challenge; how-

ever is a tractable solution provided the wind forcing is well described. It is also critical for the wave modeling effort to be properly posed (grid systems, model resolutions, wave mechanisms) and to have a high quality model that is capable of accurately simulate these complex conditions. For real event simulations it is necessary to have high quality wave measurements to evaluate not only the wind forcing, but also the wave estimates.

The motivation for the generation of the offshore wave climate for the NACCS was to properly estimate the local and far-field wave energy in the form of two-dimensional wave spectra defined at boundary locations used to force the STWAVE (Massey et al. 2011) nearshore wave simulations. WAM (Komen et al., 1994) was selected as the wave modeling technology to be used in the generation of the offshore wave climate for the NACCS. The model is a 3<sup>rd</sup> Generation wave model solving the Action Balance Equation for the advection and source terms that will describe the temporal and spatial variation of two-dimensional wave spectra over a fixed grid system. A multi-level grid system (Level1, Level2, Level3N and Level3C) was implemented for the NACCS to minimize computational requirements yet maximize the resolution along the outer boundary defined. This assured proper temporal and spatial scaling of the meteorological events occurring in the Atlantic Ocean Basin and to local-scale conditions occurring offshore of the Atlantic seaboard.

Prior to the production phase for the offshore waves evaluation testing was conducted to assess the quality of the wave model estimates for various extratropical and tropical events. The testing also provided a means to evaluate the grid system, model resolutions (in frequency and direction), and forcing functions (i.e. wind fields). A total of twenty-two storm simulations were conducted, five tropical (SuperStorm Sandy, Irene, Isabel, TS-Josephine, and Gloria) and seventeen extratropical storms based on high water level measurements and extreme wave dominated events. All evaluation test simulations used the Wave Information Study (<http://wis.usace.army.mil/>) archived wind fields used in its long-term archive. Those winds were developed by Oceanweather, Inc. The wave model results were evaluated at as many as thirty point-source measurement sites contained in the Atlantic Basin derived from NOAA's National Data Buoy Center, the Coastal Data Information Program, Canada's Meteorological Service and the USACE's Field Research Facility. The evaluation consisted of time, scatter, Quartile-Quartile graphics and a battery of statistical tests performed at each site for each grid level and for each of the

twenty-two selected storm events. The summary of these results indicated that WAM provided high quality wave estimates (low bias, low RMSE, high Correlation) compared to the measurement sites. From these tests it was necessary to initiate the Level1 WAM simulations at a minimum of 10-days prior to the occurrence of the storm peak. This assured the nearshore wave climate contained sufficient far-field wave energy generated by synoptic-scale events in the entire Atlantic Ocean basin. The evaluation testing also provided a means to develop and test the fully-automated system, generation of the boundary condition information for STWAVE, and the tools for quality checking of the final model results to be used in the production portion of the work.

For production there were two sets of extreme storm events to be simulated; 100 extratropical events, and 1050 synthetic tropical storms. The extratropical events were run on the three multi-level grid system (Level1, Atlantic Basin, Level2, Atlantic Region, Level3N and Level3C coastal NACCS domain) used in the evaluation study. The wind fields were developed by Oceanweather, Inc. The duration of every event was 8-days, where the start date was set to four days prior to the coastally defined storm peak, one-day during the peak condition and three days subsequent of the peak. As noted, wind fields were also prepared for the Level1 with an addition six days added to the front of the simulation to assure far-field wave energy was properly accounted. All model results were evaluated to point-source measurements when available. Of the possible 100 extratropical storm events approximately 60 contained point-source measurements (from ET-0040-08 through ET-0103-08) and were evaluated using the same procedure developed during the evaluation testing. Time, scatter, Quartile-Quartile graphics and statistical tests were performed at each site and for every storm. Summary results indicated WAM performed well (low bias, low RSME, high Correlation), however there were instances where the results were poor. For these events the errors were attributed to small sample size, poor measurements or the inability to accurately co-locate the model to the measurement site.

The production of the 1050 synthetic tropical storm events commenced following the extratropical simulations. There was a slight modification to the operational paradigm previously implemented for the extratropical production. The tropical storm systems and accompanied wind fields were restricted to the Level2 and Level3N/Level3C domains. Also, the simulation length was based on the various forward speeds of the tropical sys-

tems and varied between four and twelve days. The results of these simulations were QA/QC based on visual inspection of the maximum and mean wave height envelopes, and the boundary condition estimates for all nine of the STWAVE coastal domains. The results were summarized for all 1050 events, and evaluated based on maximum wind speed and significant wave height estimates. Discussions were limited to an overall consistency in the results. Maximum wind speeds were found to be between 30- to 65-m/s with accompanying  $H_{m0}$  values between 8- to 20-m and consistent with scaling principles of wind-generated wave estimates.

Generation of offshore wave estimates for extreme extratropical and tropical storm events can become very complex. However given high quality wind field forcing, a good wave model, posed in a grid system that considers the spatial and temporal scales of these types of events the outcome will be successful as in the case of this project.

## 6 ADCIRC Modeling

This chapter summarizes the storm surge modeling conducted for the NACCS using the ADvanced CIRCulation (ADCIRC) long-wave hydrodynamic model (Luettich, Westerink, and Scheffner 1992; Westerink et al. 1992). The ADCIRC model has been applied extensively to simulate extreme water levels which are forced by winds, pressures, and waves; most recently in support of FEMA flood risk map updates in the northern Gulf of Mexico region, the Great Lakes (Jensen et al. 2012, Hesser et al. 2013), FEMA Region II, FEMA Region III, and in support of USACE projects in Louisiana and Mississippi (USACE 2006, Bunya et al. 2010, Wamsley 2011). A detailed description for the general application of ADCIRC is available at <http://www.adcirc.org>. The specific application of the model to the NACCS domain is described in this chapter. The ADCIRC modeling component of the NACCS supplies model-generated water-surface elevations that are applied in the statistical analysis and are also made available through the Coastal Hazards System (CHS). This chapter describes the hydrodynamic model ADCIRC, the NACCS model development including mesh generation as well as the forcing mechanisms used to drive the model, the validation procedure for ensuring the model accurately depicts water-surface elevations in the study area, and application of the validated model for NACCS production.

### 6.1 Model Description

The physics-based ADCIRC model was developed as part of the USACE Dredging Research Program (DRP) as a family of two- and three-dimensional finite element-based models (Luettich, Westerink, and Scheffner 1992; Westerink et al. 1992). The model represents all pertinent physics of the three-dimensional equations of motion including tidal potential, Coriolis, and all nonlinear terms of the governing equations as described in the paragraphs below. ADCIRC is capable of simulating tidal circulation and storm-surge propagation over very large computational domains while simultaneously providing high resolution in areas of complex shoreline configuration and bathymetry. The model provides accurate and efficient computations over time periods ranging from days to months to years.

ADCIRC has been successfully applied in a large number of coastal applications, including the Louisiana Coastal Protection and Restoration (LACPR) project (USACE 2006), and the Mississippi Coastal Improvements Program (MSCIP) (Wamsley 2011), the Lake Michigan storm wave and water level study (Jensen et al. 2012), and the Lake St. Clair storm wave and water level study (Hesser et al. 2013). This model was chosen for simulating waves and water levels for the NACCS study for a large suite of storms described in this report. Applying wind fields from Ocean-weather Inc., the two-dimensional, depth-integrated ADCIRC model accurately predicts tidally- and wind-driven water-surface levels for the study area.

In two dimensions, the model is formulated using the depth-averaged shallow water equations for conservation of mass and momentum. The formulation assumes that the water is incompressible, hydrostatic pressure conditions exist, and that the Boussinesq approximation is valid. Using the standard quadratic parameterization for bottom stress and neglecting baroclinic terms and lateral diffusion/dispersion effects, the following set of conservation equations in primitive, nonconservative form, and expressed in a spherical coordinate system (Flather 1988; Kolar et al. 1994, Westerink et al. 2008). The momentum equations are spatially differentiated and substituted into the time differentiated continuity equation to develop the Generalized Wave-Continuity Equation (GWCE).

ADCIRC solves the GWCE in conjunction with the primitive momentum equations. The GWCE-based solution scheme eliminates several problems associated with finite-element programs that solve the primitive forms of the continuity and momentum equations, including spurious modes of oscillation and artificial damping of the tidal signal. Forcing functions include time-varying water-surface elevations, wind shear stresses, atmospheric pressure gradients, and the Coriolis acceleration effect. Also, the study area can be described in ADCIRC using either a Cartesian (i.e., flat earth) or spherical coordinate system.

The ADCIRC model uses a finite-element algorithm in solving the defined governing equations over complicated bathymetry encompassed by irregular sea/ shore boundaries. This algorithm allows for extremely flexible spatial discretization over the entire computational domain and has demonstrated excellent stability characteristics. The advantage of this flexibility in developing a computational mesh is that larger elements can

be used in open-ocean regions where less resolution is needed, whereas smaller elements can be applied in the nearshore and estuary areas where finer resolution is required to resolve hydrodynamic details.

## 6.2 Mesh Development

### 6.2.1 General

The ADCIRC model domain developed for the NACCS encompasses the western North Atlantic, the Gulf of Mexico and the western extent of the Caribbean Sea (Figure 6-1). The mesh consists of 3.1 million computational nodes and 6.2 million elements with an open-ocean boundary specified along the eastern edge (60-deg west longitude). The largest elements are in the Caribbean Sea, with nodal spacing of about 40 km. The smallest elements resolve detailed geographic features such as tributaries, where nodal spacing is approximately 10 m. The NACCS mesh boundary was aligned with the U.S. National Geospatial-Intelligence Agency (NGA) Digital Nautical Chart (DNC) coastline and bathymetry was extracted from the NGA DNC database, except where specified in the following sections. Details of the mesh development are outlined herein.

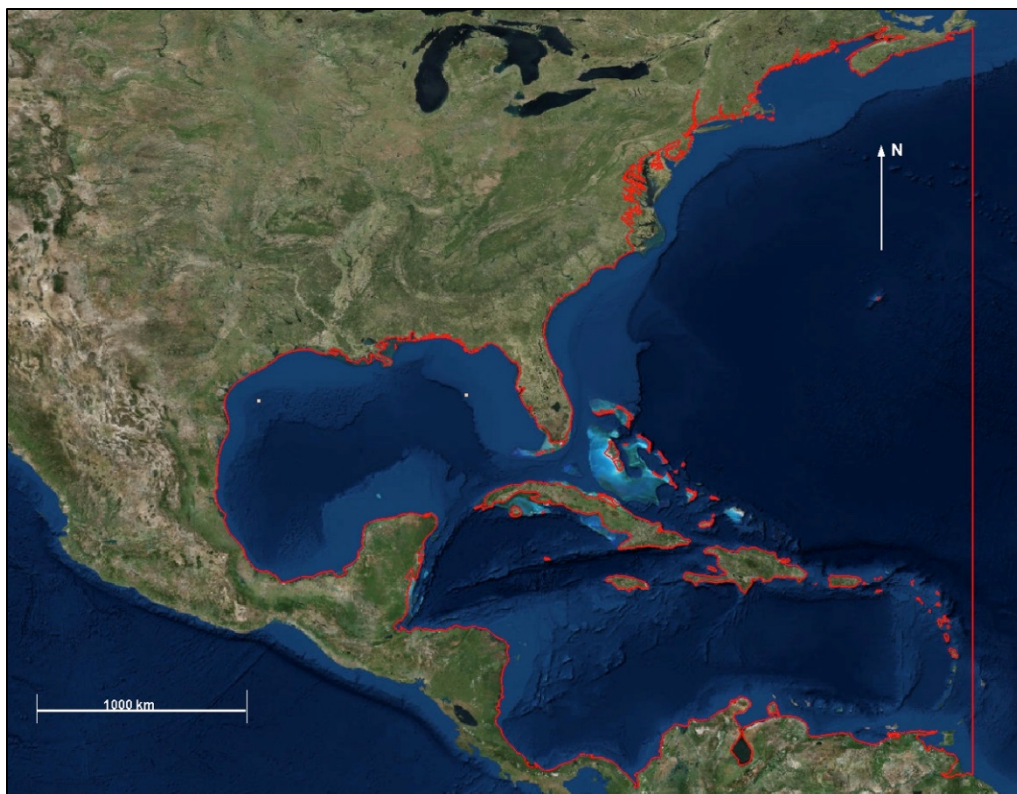


Figure 6-1. ADCIRC mesh domain boundary (shown in red).

### 6.2.2 Details

The ADCIRC mesh developed and applied to the NACCS was adapted from a combination of two previously validated FEMA model meshes and the NOAA VDATUM mesh. For the northern reaches, the combined mesh was refined, expanded, and extended into areas not included in the existing meshes. The full NACCS finite element mesh included the upland areas to allow for flooding and drying of these areas during storms and to allow for overland wind reduction in the model simulations. The inland limit of the ADCIRC mesh was determined by querying the USGS National Elevation Dataset (NED) 10-m resolution database and extracting the 20-m topographic contour.

Two of the existing meshes used in the initial NACCS grid development were generated and applied by FEMA to perform updates to their flood maps. The first mesh was developed for FEMA Region II, with mesh resolution focused in the New York and New Jersey areas. The second existing mesh was developed for FEMA Region III, with mesh resolution detail focused in the Chesapeake Bay region of the Atlantic coast. Areas south of and including Delaware Bay were extracted from the FEMA Region III mesh, while areas north of Delaware Bay to New York Harbor were extracted from the FEMA Region II mesh. As noted in the review process, there is variable mesh resolution off the coast of New Jersey when transitioning from the FEMA Region III mesh to the FEMA Region II mesh. The average nodal spacing along the NY/NJ area is noticeably larger from one mesh to the other and the nodal spacing normalized by the depth is also noticeably larger in this region. However, an examination of the bathymetry in the area shows that there is a continuous, smooth representation of the bathymetry. In addition, preliminary validation results with the combined NACCS mesh in the New York/New Jersey area shows that the model is correctly capturing the physics because model and measurements compare well regardless of the larger nodal spacing in this area. Based on the smooth bathymetry and the reasonable validation results, a decision was made to maintain the integrity of the two (FEMA Region II and FEMA Region III) validated meshes.

East of New York Harbor, from approximately Flushing Meadows to the northern mesh limits, the initial NACCS mesh was derived from the NOAA VDATUM mesh. However, the north mesh area extracted from the NOAA VDATUM mesh was extensively revised for this study, primarily by increasing mesh resolution, but also by optimizing the agreement between 1)

the mesh coastline definition and 2) Controlled-Image Base 5 (CIB5) satellite imagery published by the U.S. National Geospatial Intelligence Agency (NGA) and NOAA-published Electronic Navigation Charts (ENCs). This section of the mesh is referred to as the “North Mesh”. As with FEMA Region II and FEMA Region III, the full ADCIRC mesh developed for this study is referenced to NAD83<sup>1</sup> (horizontal) and mean sea level (MSL) (vertical) in meters. The final mesh contained over 6 million computational elements and over 3 million computational nodes (Figure 6-2).

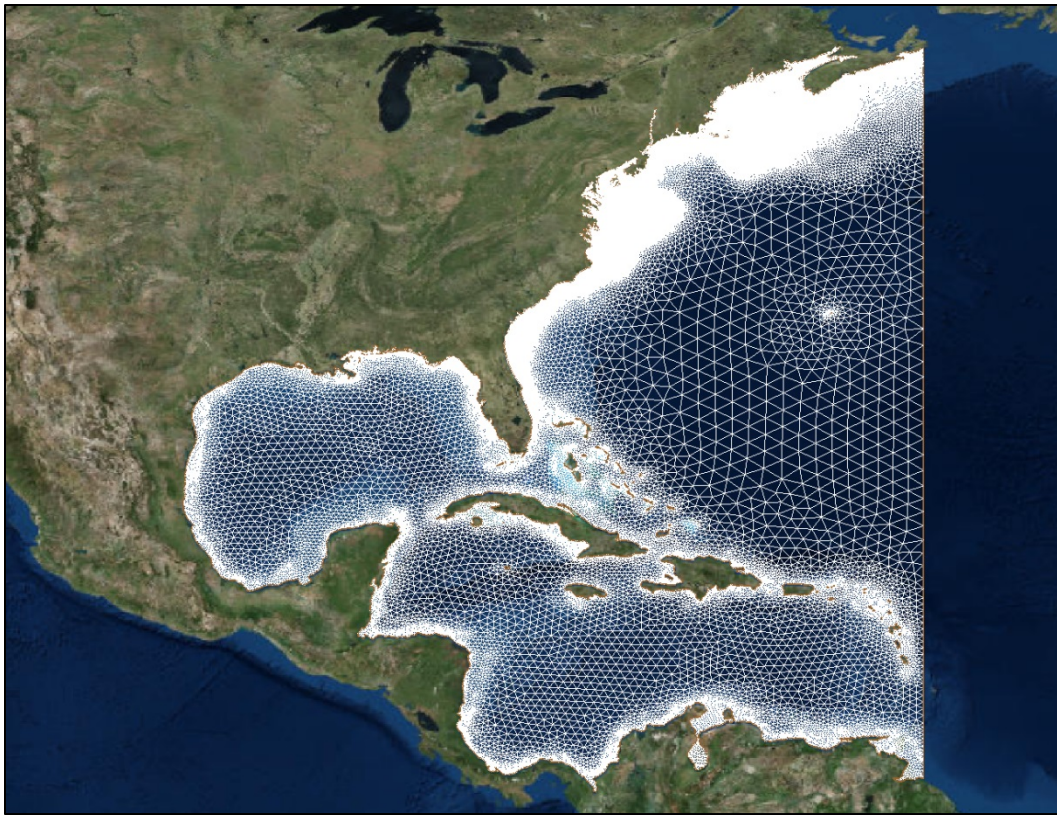


Figure 6-2. ADCIRC mesh for NACCS.

### 6.3 Bathymetric and Topographic Data Sources

Sources of bathymetric and topographic data for the ADCIRC mesh were gathered from the existing meshes, published data sources, recent data

---

<sup>1</sup> The coastline representation in the North mesh is based on the CIB5 satellite imagery (with a pixel size in the imagery of approximately 5 meters) and is referenced to the WGS84 horizontal datum. This datum has only a 1-meter displacement relative to the NAD83 datum, and the two datums are considered identical when the precision of the data is less than 2 meters (i.e., the horizontal displacement between the datums is less than the precision of the data itself).

collection, and personal contacts. Contact was made with personnel at federal and state government agencies, as well as university professors and private consultants, in order to acquire bathymetry and topography to update the ADCIRC mesh. The primary goal was to obtain post-Sandy bathymetry and topography data where it existed so that the mesh could be updated to post-Sandy conditions. Pre-Sandy bathymetry and topography data were also gathered where more recent data did not exist.

### **6.3.1 Bathymetry**

Bathymetry specified in the FEMA Regions II and III portions of the ADCIRC mesh remained unchanged and were applied directly in this study. Bathymetry specified in the North Mesh was obtained from NOAA-published ENC's and NGA Digital Nautical Charts (DNCs). The NGA republishes NOAA-produced ENC's in NGA format, which is the preferred data source because NGA-formatted data are easier to extract from the databases. However, bathymetry values within the coastal zone were taken from NOAA-published ENC's where NGA DNC data values did not exist. Each bathymetric source provided data referenced to mean-lower-low water (MLLW). Bathymetry was subsequently converted to mean sea level (MSL) using conversion values published by NOAA for stations that encompass the region of the North Mesh.

### **6.3.2 Topography**

Topography specified in the FEMA Regions II and III portions of the ADCIRC mesh remained unchanged and were applied directly in this study. However, the NACCS did require potential sources for topographic data for the NOAA VDATUM portion of the ADCIRC mesh. For New England, terrain data from the USGS National Elevation Dataset (NED) 10-m resolution database were queried to determine inland limits for the ADCIRC mesh. The 7-m topographic contour was extracted from the database in order to incorporate low-lying areas into the ADCIRC mesh to allow for flooding and drying of these areas during storms. The 20-m topographic contour was extracted from the database in order to allow for overland wind reduction in the model simulations. A finite element mesh was developed for these upland areas and merged with the bathymetric mesh.

### 6.3.3 ERDC LIDAR

Post-Sandy LIDAR data collected by ERDC was used to update the ADCIRC mesh topography along the New Jersey, New York, and Connecticut coastal areas. Bare-earth 1 meter grids based on 2012 LIDAR data were provided by the Joint Airborne LIDAR Bathymetry Technical Center of Expertise, also known as JALBTCX (<http://shoals.sam.usace.army.mil>). The mission of JALBTCX is to perform operations, research, and development in airborne LIDAR bathymetry and complementary technologies to support the coastal mapping and charting requirements of the US Army Corps of Engineers (USACE), the US Naval Meteorology and Oceanography Command, and the National Oceanic and Atmospheric Administration (NOAA). JALBTCX staff includes engineers, scientists, hydrographers, and technicians from the USACE Mobile District, the Naval Oceanographic Office (NAVOCEANO), the USACE Engineer Research and Development Center (ERDC), and NOAA National Geodetic Survey. JALBTCX data can be downloaded via the NOAA Digital Coast Data Access Viewer (<http://www.csc.noaa.gov/dataviewer/>).

JALBTCX provided the New York/New Jersey/Connecticut tri-state 2012 LIDAR as raster images with elevations referenced to NAVD88 (Figure 6-3). These data were converted from NAVD88 to MSL to be incorporated into the ADCIRC mesh and STWAVE grids. To perform the datum shift to MSL, differences between MSL and NAVD88 were taken at known points within the region using NOAA tide gauges and the VDATUM program. These differences were used to create a continuous TIN surface over the area of interest in ArcGIS. The TIN surface was then converted to a 1 meter raster grid and subtracted from each of the original NAVD88 rasters to create a new raster for each 2012 bare-earth grid file with elevations relative to MSL. The newly created MSL rasters were converted to ASCII text files in ArcGIS for ready implementation in the model grids.

Incorporation of the newly created MSL LIDAR data into the numerical model grids was achieved via the application of a computationally efficient inverse weighted residual interpolation technique. In total, over 149000 node elevations were updated within the tri-state; including over 13000 node elevation updates in Connecticut, over 17000 node elevation updates in New Jersey, and over 118000 node elevation updates in New York. An overview of the ADCIRC mesh that incorporated over 149000 node elevation updates based on the JALBTCX 2012 LIDAR is shown in Figure 6-4. A comparison of a portion of the ADCIRC mesh for Long Island, New York before and after the incorporation of 2012 LIDAR indicates an apparent

dune lowering along the Atlantic coast of Jones Beach and Long Beach (Figure 6-5 and Figure 6-6).

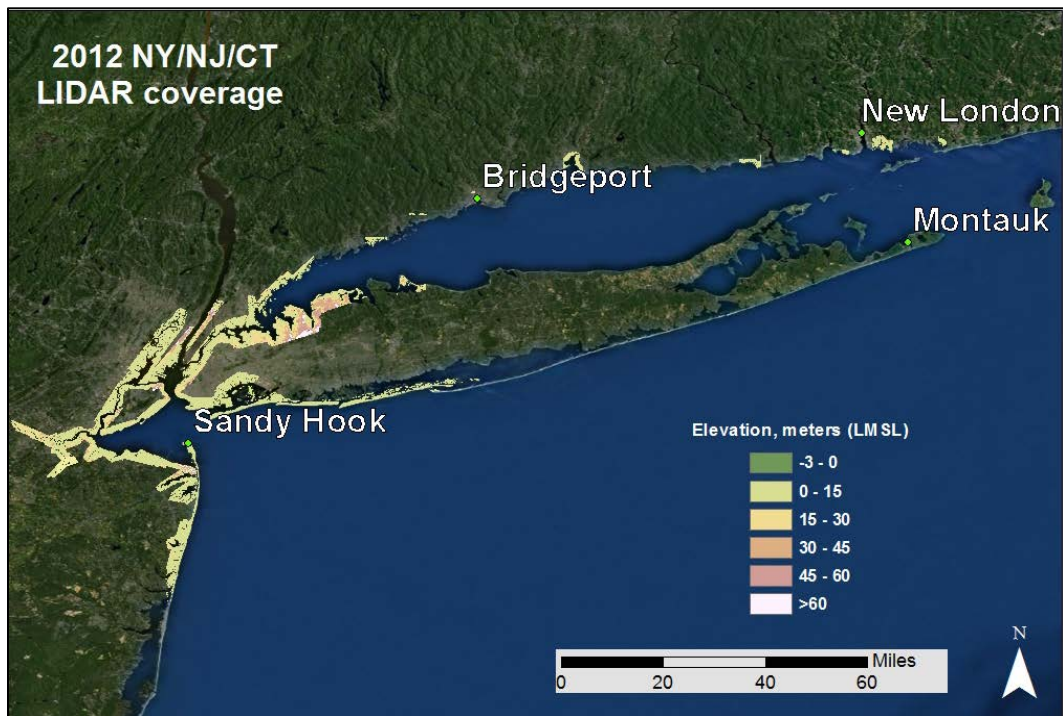


Figure 6-3. 2012 LIDAR Coverage for New York, New Jersey, and Connecticut.

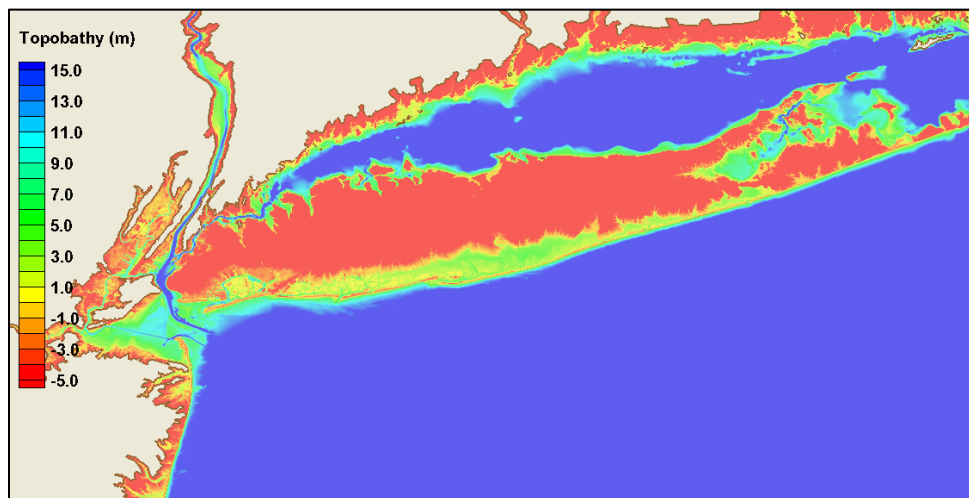


Figure 6-4. Portion of the ADCIRC mesh that incorporated over 149000 node elevation updates based on the JALBTCX 2012 LIDAR.

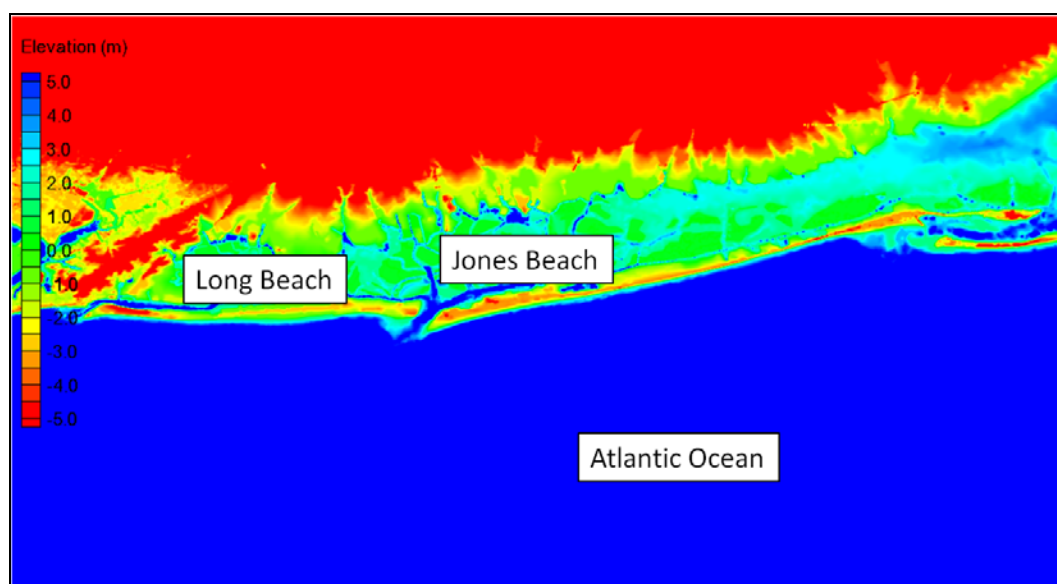


Figure 6-5. ADCIRC mesh topography/bathymetry for a portion of Long Island, New York before 2012 LIDAR update.

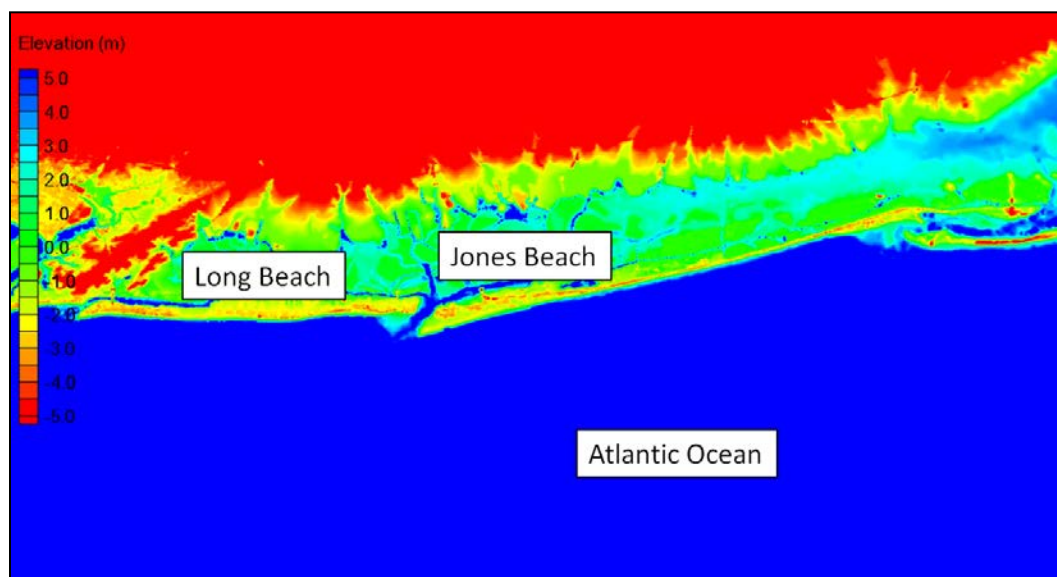


Figure 6-6. ADCIRC mesh topography/bathymetry for a portion of Long Island, New York after 2012 LIDAR update.

#### 6.3.4 USGS LIDAR

The U.S. Army District, New York was able to obtain and provide the USGS 2012 post-Sandy LIDAR data for Long Island, New York to ERDC. All LIDAR data were processed and incorporated into both ADCIRC and STWAVE model domains. This effort was achieved via the application of a computationally efficient inverse weighted residual interpolation tech-

nique updated for this project. These topographic changes have been included in the validation sequence described below. Care was taken to ensure smooth transitions in topographic values between the newly updated areas and the existing surrounding data.

The ADCIRC mesh with the LIDAR incorporated showed breaches near Smith County Park, NY (Figure 6-7) and east of Moriches Inlet, NY (Figure 6-8) with the implementation of the LIDAR data. The U.S. Army District, New York indicated that the two breaches were relatively quickly repaired to 8 ft NAVD88 (2.51 m MSL) following Hurricane Sandy and NAN requested that ERDC "repair" the two breaches in the mesh. Figure 6-9 and Figure 6-10 show the breach repaired conditions for Smith County Park, NY and east of Moriches Inlet, NY, respectively. In addition U.S. Army District, New York noted that the breach at "Old Inlet", NY was being left in its natural state and it was requested that the breach be widened to 200 m and deepened to 2 m MSL in the computational grid. This condition is shown in Figure 6-11.

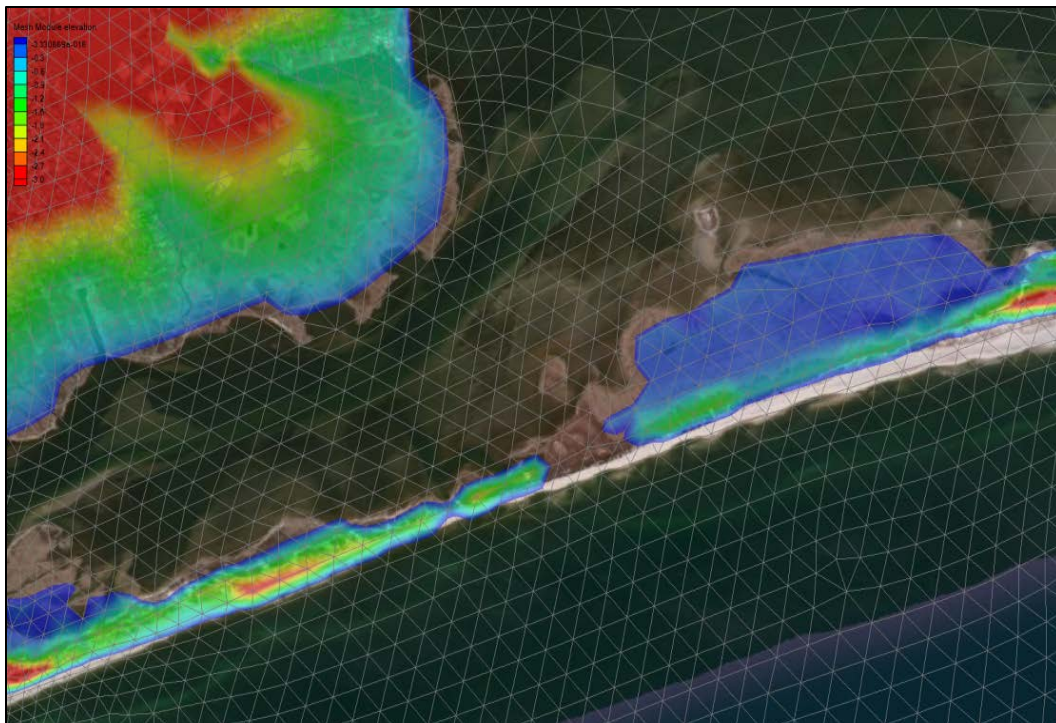


Figure 6-7. Post-Sandy breach at Smith County Park, NY.

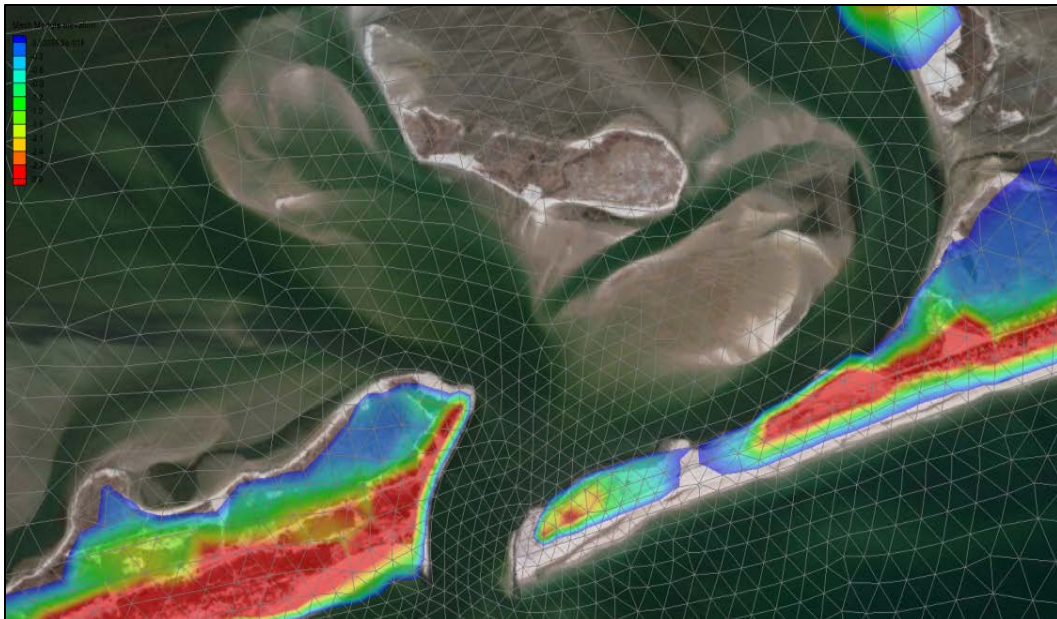


Figure 6-8. Post-Sandy breach east of Moriches Inlet, NY.

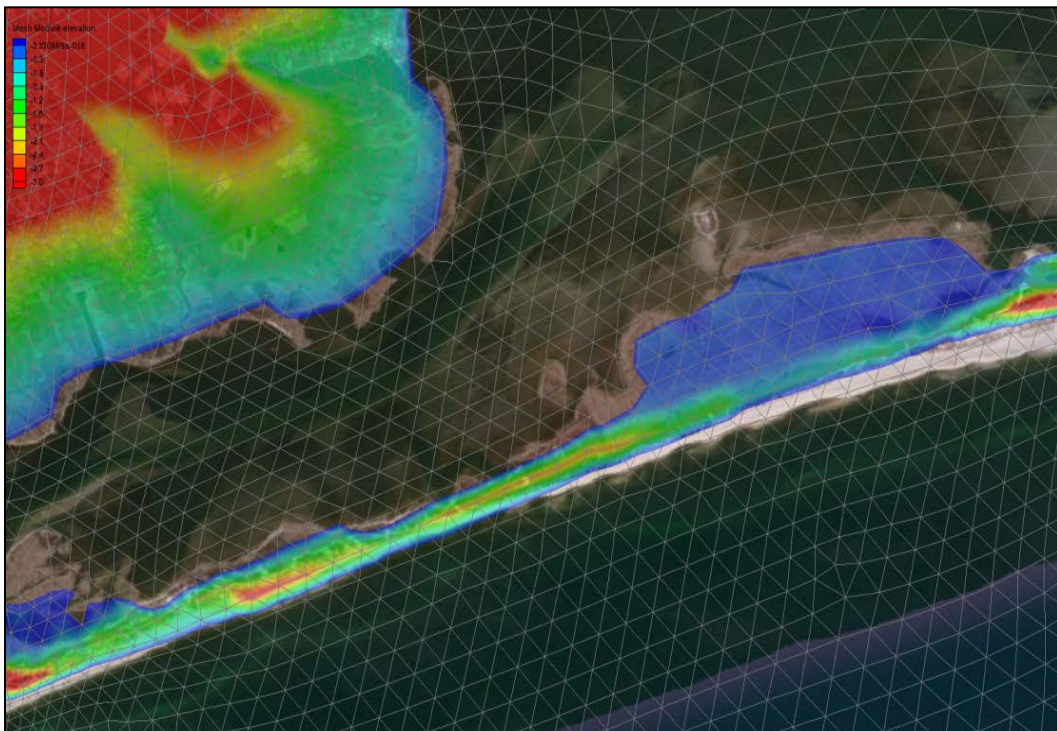


Figure 6-9. Breach "repaired" at Smith County Park, NY.

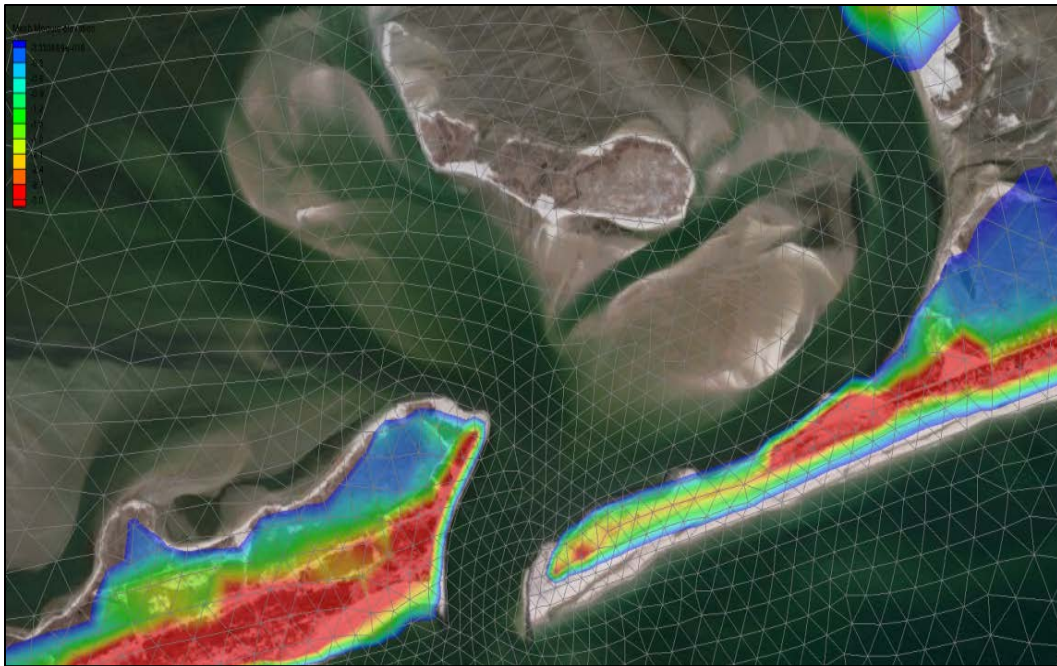


Figure 6-10. Breach "repaired" east of Moriches Inlet, NY.

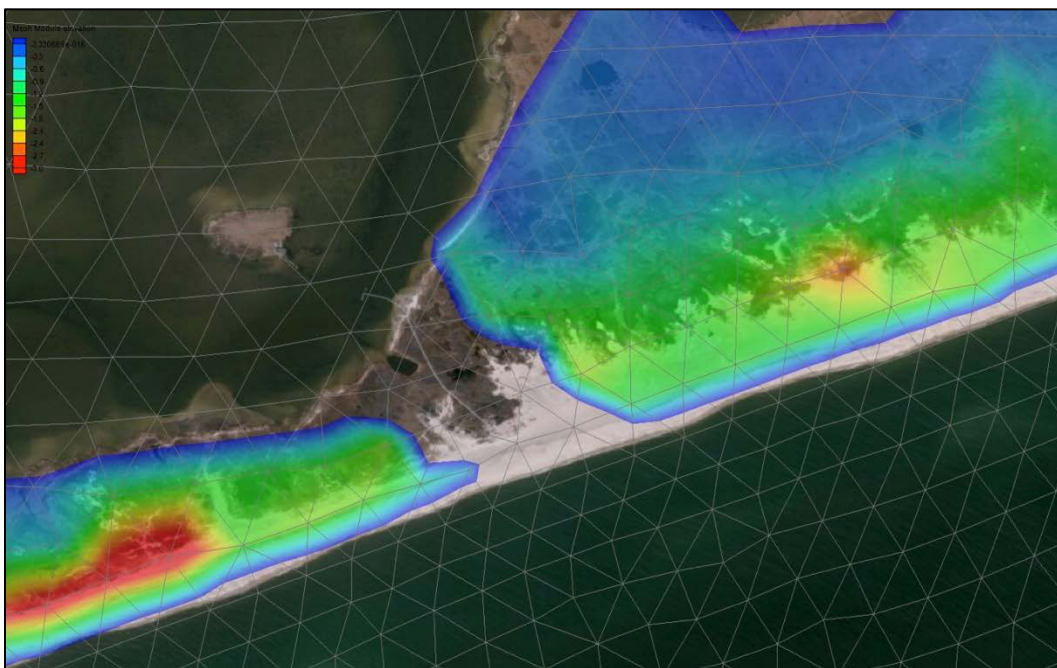


Figure 6-11. Breach at "Old Inlet", NY.

## 6.4 Forcing Conditions

The hydrodynamic model ADCIRC was applied to the NACCS to respond to astronomical and meteorological forcing conditions. Tidal forcing was

applied at the open ocean boundary, river inflows were applied at the river boundaries, and meteorological forcing (winds and pressures) were applied over the North Atlantic basin. A description of these forcing conditions is described in this section. In addition, wave forcing was applied to the model through coupling with STWAVE, details of which will be described in Chapter 7.

#### **6.4.1 Tidal Forcing**

The open ocean boundary (60-deg west longitude) was forced with 8 tidal constituents. Time-varying tidal elevations specified at nodes along the open ocean boundaries were synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Constituent information was extracted from a database developed from the TOPEX 7 satellite measurements. Because the model domain is of sufficient size that celestial attraction induces tide within the mesh proper, tide-generating potential functions were included in the simulations, and correspond to the constituents listed above.

#### **6.4.2 River Inflows**

Fourteen rivers were included in the ADCIRC mesh (Table 6-1). The majority of these rivers had USGS gages (with mean daily flow rates) located either at upstream dam locations or at the head of tide with sufficient periods of record available for analysis (data began in the 1930's and 1940's for most gages). However, the Raritan and Passaic Rivers required U.S. Army District, New York personnel to translate flow from a known gage measurement/location to the model boundary location through data manipulation.

The mean daily flow rate for each of these river inflow locations was obtained for the period from approximately 1930 to present. Initially, the impact of river inflows on water levels was investigated collectively by applying the flow of record for all 14 rivers in a single model simulation. From this analysis it was determined that if all rivers were simultaneously discharging at their maximum rate, the maximum potential change in water level due to river inflow was at most 0.2 m for the larger bays (Chesapeake, Delaware, etc.) with larger impacts observed near the river boundaries not considered part of the project study area. Though the effect of river inflow is not a significant factor, the inclusion of as many physical processes as possible will reduce the uncertainty in computed water levels. Flow rates for historical extratropical and tropical storms from this region

were extracted from the measurements and were analyzed in conjunction with the storm characteristics to determine if a correlation between storm characteristics (speed, pressure, etc.) and the measured river flow rate existed. This analysis indicated that the flow rate is independent of the storm and there is no discernable correlation.

#### *6.4.2.1 Extratropical Production Inflows*

Since the extratropical storms were historical events, USGS measured flows were utilized to determine representative river flows for each individual storm. The USGS daily flow rates were extracted for +/- 3 days from the date of the peak water level as recorded by the NOAA gages in the region. An analysis was performed on these flow rates to determine the 90th percentile flow (for each river individually) that occurred during the corresponding storm. This 90th percentile flow was specified as a constant inflow in the model in an effort to obtain realistic flows for a particular extratropical event that would still result in slightly conservative water levels.

#### *6.4.2.2 Tropical Production Inflows*

The synthetic tropical storms used in this study had no historical flow rates making the previously used method for the extratropical storms unfeasible. Also, from the previously discussed analysis, historical tropical storms exhibited no significant correlation between any of the storm forcing parameters and river inflows, making the creation of a regression/conversion using a storm characteristic(s) to flow rate unfeasible. Therefore a separate methodology was utilized to determine the tropical flow rates.

Since there was no correlation between storm characteristics and flow rate, determining storm specific flows was not feasible and as such a single flow rate for each river was utilized for all synthetic tropical storms. This also resulted in significant time/computational savings as individual flows for each storm would require individual river spin-up simulations in ADCIRC thereby greatly increasing run times and computational burdens.

Although previous studies have applied mean discharge rates, from analysis conducted in this study it was found that mean discharges did not adequately represent the range of values sought in an extreme value analysis. Since a single flow rate for each river was needed to represent the dis-

charges during all the historical tropical storm events in our sample set it was deemed reasonable for each tropical storm to be represented by its maximum discharge instead of the mean. These inflows were determined by examining flow rates during historical tropical storm events and performing a statistical analysis of those flow rates. The maximum flows  $\pm$  3 days about landfall were extracted for 45 historical storms and analyzed to determine a representative flow rate to use in the model. Different statistics of the historical maximum flows were evaluated that, similar to the historical extratropical storms simulations, would also result in slightly conservative water levels. It was found that for most rivers the 90th percentile of the maximum discharged resulted in comparable values to the "mean plus one standard deviation" discharges. Therefore, the production discharge for tropical storms for each river was computed as the maximum value between the 90th percentile and a discharge equal to the mean plus one standard deviation. On average, the production discharge of each river is close to three times the mean discharge as can be observed in Table 6-1. This method was utilized to create reasonable inflows that would result in somewhat conservative water levels.

Additional analyses were done to examine the impact of production and maximum river inflows on water levels for specific storm events and the impact of each individual river on water levels when a maximum or production flow rate is applied. Details of this additional research and analysis are presented in a companion paper on the variability of water level response to river inflow rates.

Table 6-1. River flow rates determined from analyzing 100 historical tropical events.

River	Mean Flow (cms)	Production Flow (cms)	Maximum Flow (cms)
Brandywine River	70	255	405
Chester Creek	20	57	163
Connecticut	802	1954	6400
Delaware	829	2209	7900
James	589	1982	8382
Mattaponi	36	85	283
Pamunkey	93	311	708
Potomac	993	3794	9458
Rappahannock	228	736	2384
Schuylkill	358	934	2645
Susquehanna	2043	7617	31715

River	Mean Flow (cms)	Production Flow (cms)	Maximum Flow (cms)
Hudson	570	1444	4474
Passaic	76	283	615
Raritan	221	651	1969

### 6.4.3 Wind Forcing

All wind and pressure fields applied to the NACCS were generated by Oceanweather, Inc (OWI). Historical extratropical storm wind and pressure field generation was accomplished for 100 events selected based on the water level analysis described in Chapter 3. OWI analysis of each event covered an 8-day period centered around the time of the peak water level for each event. Previously, Oceanweather developed the WIS (Wave Information Study) Level II wind fields on a 0.25 degree grid covering the domain 22-48N 82-52W for the period 1980-2011. These fields applied adjusted NCEP/NCAR reanalysis wind fields as a base, then assimilated NDBC buoy/C-MAN stations and manually reanalyzed storm events using the Interactive Objective Kinematic Analysis (IOKA) methodology. Storm analysis was primarily offshore (wave driven) rather than near-shore/coastal which is important in the NACCS ADCIRC modeling.

Therefore, NACCS wind and pressure fields were developed for the 100 storm set on two working grids: 1) the original WIS Level II domain and 2) a 0.125 degree domain covering 36-45N 78-66W. The temporal spacing (time interval) between wind and pressure snapshots was 30 minutes. Storm analysis included reanalysis of the storm core of winds generating the maximum ocean response and the assessment/assimilation of coastal station data such as National Weather Service reporting stations and National Ocean Service stations not considered as part of the WIS effort. Background fields were primarily sourced from the NCEP/NCAR reanalysis for the 1948-1978 time period and from the Climate Forecast System Reanalysis (CFSR) for 1979 to the present. The few storms prior to 1948 applied products from the NCEP 20<sup>th</sup> Century Reanalysis project. Matching pressure fields on both grids were sourced from reanalysis products and interpolated onto the WIS/NACCS grids.

Storm wind and pressure fields developed for the 1050 synthetic storms selected in the storm selection process were a joint effort of ERDC and OWI as outlined in the OWI contractor report. ERDC specified the tropical storm parameters for each synthetic event and OWI generated track paths and the modification of the basic storm parameter set along the

tracks. The TC96 tropical wind and pressure model applied by OWI to generate the wind and pressure fields is the same modeling system applied by ERDC and also in many of the FEMA studies (Thompson and Cardone 1996). The overall storm duration for each synthetic event was a function of the storm's forward speed. The temporal spacing between wind and pressure snapshots for all storms was controlled by the fastest moving storms, which required a 5-minute snap interval.

#### **6.4.4 Steric Adjustment and Sea Level Change**

Thermosteric and halosteric sea level changes are in response to fluctuations in temperature and salinity, respectively. The cumulative effect of both thermosteric and halosteric changes is referred to herein as the total steric adjustment. In order to account for the seasonal mean sea surface variability within the ADCIRC simulations, long-term NOAA stations (<http://tidesandcurrents.noaa.gov/sltrends/sltrends.html>) from Maine to Virginia were examined. For example, the steric adjustment or average seasonal cycle of mean sea level along with a 95% confidence interval is shown in Figure 6-12 for Station #8534720 Atlantic City, NJ. Since the steric adjustment varies both temporally and spatially, two approaches were adopted for the ADCIRC simulations and are described below. Approach #1 was applied to historical extratropical storm events and Approach #2 was applied to synthetic tropical storm events.

1. For historical extratropical storm events, a unique steric adjustment value was calculated using the spatial arithmetic mean steric values during the time of each historical event at NOAA Station #8418150 Portland, ME and Station #8534720 Atlantic City, NJ. For example, a steric adjustment value of 0.04 m will be applied for the extratropical storm event that occurred on October 1, 2010 (i.e. the average of 0.013 m for Station #8418150 and 0.067 m for Station #8534720).
2. For synthetic tropical storm events, a temporal weighted mean value in addition to the spatial arithmetic mean value was used when computing the steric adjustment. Using Station #8534720 (Atlantic City, NJ) and Station #8638863 (Chesapeake Bay Bridge Tunnel, VA) (Figure 6-13), the spatial arithmetic means were computed for each month. Next, the temporal mean values were calculated for hurricane season. While hurricane season is from June through November, the relative frequency of storms occurring during the

month of September is nearly double that of the next most frequent month (August). Monthly weights during hurricane season (weights provided in parentheses) are as follows: June (0.04), July (0.04), August (0.26), September (0.48), October (0.12), and November (0.06). Applying the temporal weighting factors to the arithmetic mean of the upper 95% confidence band resulted in a steric adjustment value of 0.1 m, which will be applied for all synthetic tropical storm events.

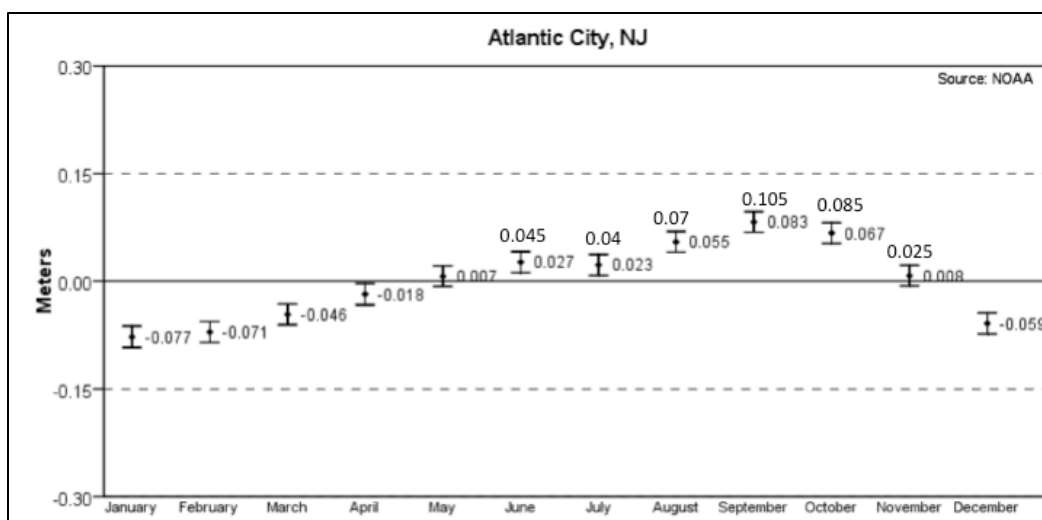


Figure 6-12. Mean and 95% confidence band steric adjustment of mean sea level for Station #8534720 Atlantic City, NJ.

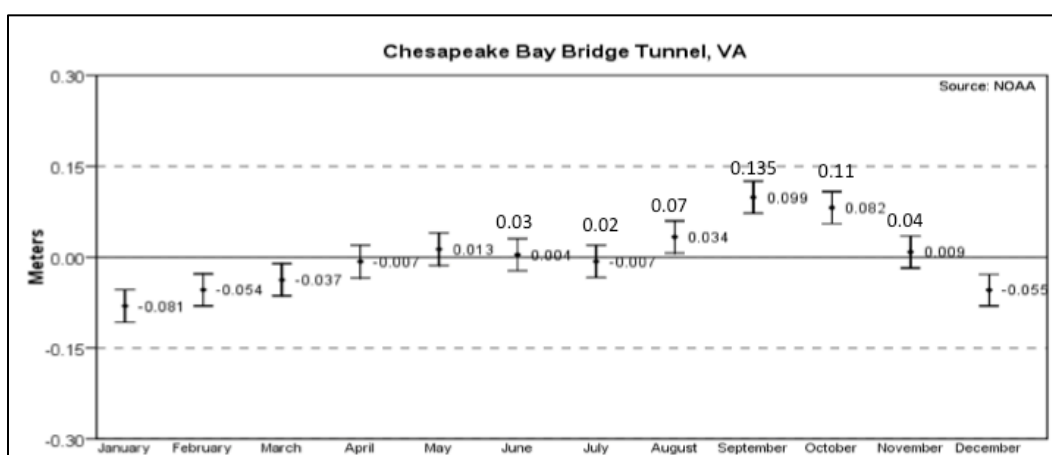


Figure 6-13. Mean and 95% confidence band steric adjustment of mean sea level for Station #8638863 Chesapeake Bay Bridge Tunnel, VA.

The goal of the steric height adjustment is to account for physics not represented in the model (baroclinic terms) by applying a single water level adjustment value to the entire mesh. Back bays may have more variability in temperature and salinity than the open coast; therefore the selected steric height adjustment value may not be equally applicable in interior bays. However, the goal of the modeling effort was to provide a large domain regional model that could be applied directly to projects or used as a driving condition for inset models. Additionally, local datum adjustment could be applied to results at inland bay locations.

## 6.5 Nodal Attributes

The ADCIRC model has the ability to specify certain quantities at location points (nodes) within the model's computational domain, and these quantities are referred to as nodal attributes. The nodal attributes used in this study include: 1) Manning's  $n$  bottom friction coefficient; 2) lateral eddy viscosity; 3) land cover effects on winds (also referred to as canopy effect); 4) directional wind reduction factors which are derived from land use; and 5) primitive weighting in the model's continuity equation, also known as  $\text{Tau0}$ .  $\text{Tau0}$  is the weighting factor in the Generalized Wave-Continuity Equation (GWCE) that governs the relative contribution of the primitive and wave portions of the GWCE.

The nodal attributes of Manning's  $n$  bottom friction coefficients, canopy effects, and directional wind reduction factors applied in the FEMA Region II and FEMA Region III study areas were retained for this study. The FEMA Region III mesh used a lateral eddy viscosity of  $10 \text{ m}^2/\text{s}$  for land nodes and a value of  $4 \text{ m}^2/\text{s}$  for water nodes, while the FEMA Region II simulation used a constant lateral eddy viscosity of  $50 \text{ m}^2/\text{s}$ . Both sets of values have been used in other studies for storm surge modeling with ADCIRC. ERDC-CHL evaluated applying the strategy from the FEMA Region III mesh of  $10 \text{ m}^2/\text{s}$  for eddy viscosity for land nodes and  $4 \text{ m}^2/\text{s}$  for water nodes for the entire mesh. In addition, CHL is testing the effect of locally smoothing the eddy viscosity values in order to avoid sharp gradients in the lateral eddy viscosity. The primitive weighting coefficient values for FEMA Region II and FEMA Region III generally follow the standard methodology for setting  $\text{Tau0}$  based on depth and nodal spacing; however  $\text{Tau0}$  values in those studies do have some manual, local adjustments for reasons unknown to ERDC-CHL. For initial testing application by ERDC-CHL, the standard primitive weighting was applied to the entire domain for consistency.

Nodal attributes developed for the North Mesh are as follows:

#### **6.5.1 Manning's $n$ Bottom Friction Coefficient**

Separate land and water data sources for the Manning's  $n$  coefficients were used for the North Mesh. For land-based nodes, Manning's  $n$  values are based on the USGS-published land coverage types together with the Manning's  $n$  associated for a particular type as published in Bunya et al. (2010). For water-based nodes, the Manning's  $n$  is based on the bottom characteristic or type published in the NGA's DNCs, with distinct values assigned to areas of sand, gravel, clay, etc.

#### **6.5.2 Lateral Eddy Viscosity**

As with the FEMA Region III domain, water nodes were assigned a viscosity of  $4 \text{ m}^2/\text{s}$  and land nodes were assigned a viscosity of  $10 \text{ m}^2/\text{s}$ . As mentioned above, ERDC-CHL is tested and applied locally smoothing to the eddy viscosity values in order to avoid sharp gradients.

#### **6.5.3 Primitive Weighting Coefficient**

The generation of the Tau0 values follows the standard methodology as outlined in the ADCIRC website utility program ([http://adcirc.org/home/related-software/adcirc-utility-programs/tau0\\_gen.f](http://adcirc.org/home/related-software/adcirc-utility-programs/tau0_gen.f)). The method for setting Tau0 is based on both depth and nodal spacing. In particular, if the average distance between a node and its adjacently connected neighbor nodes is less than 1750.0 meters, then Tau0 is set to 0.030. If the average distance between a node and its adjacently connected neighbor nodes is greater than 1750.0 meters and the water depth is less than 10.0 meters, then Tau0 is set to 0.02, while distances greater than 1750.0 meters and depths greater than 10.0 meters the value of Tau0 is set to 0.005. CHL is performing test with Tau0 set according to this criteria as well as a locally averaged Tau0 version that helps to smooth sharp gradients in Tau0 that can exist based on the criteria above.

#### **6.5.4 Canopy coefficient**

The synthetic wind and pressure fields that are typically used for these types of studies are created by using a planetary boundary layer model. This model assumes that the winds and pressures are being generated over open water without land effects impacting the winds. In reality as tropical

storms move closer to land, the rotating winds are diminished after traversing over land and encountering heavily forested areas or large buildings. Due to this limitation of the modeled winds, and similarly for hindcast wind products, two nodal attributes are used by ADCIRC to make adjustments: the canopy coefficient and the directional wind reduction coefficient. The canopy coefficients are based on the USGS-published Land Coverage types. Nodes that reside in heavily forested areas are assigned a coefficient of zero indicating no wind energy transfer to the water column, whereas a coefficient of one is specified for all other areas. This has the effect of setting winds to zero in heavily forested areas. A point of consideration by ERDC-CHL will be to investigate the use of the canopy coefficient for highly urbanized areas.

#### **6.5.5 Directional Wind Reduction**

The surface directional effective roughness length makes adjustments to the winds by looking at the aggregate land use types in 12 directional bands around each node. This allows for different surface roughness values for areas over open water as compared to areas over marsh grasses, or scrub bushes etc. This nodal-based parameter is a set of 12 values assigned to each mesh node, with each value corresponding to a 30 deg wedge emanating from a given node. Each wedge represents a potential direction from which winds can come towards the node. For each of the 12 wedges, a wind reduction factor is assigned to the node, based on the vegetation type in that wedge upwind of the node. Additional details can be found in Westerink et al. 2008.

### **6.6 High Frequency Save Point Locations for Model Output**

The ERDC team worked directly with District personnel in order to establish storm surge and wave save point locations where model results (i.e. time series of water level, water and wind velocity, and wave conditions) were saved during each CSTORM-MS model simulation at a higher temporal frequency than the global solution. Model results saved during each simulation at the save point locations can provide useful information at District project sites and/or can be applied as boundary forcing conditions for local refined numerical models. District personnel provided XY locations for save points (at project locations and other areas of interest) as well as depth contour and spacing information for additional save points. The requested save point locations were then imported into the existing ADCIRC mesh and the local mesh resolution in the vicinity of each save

point location was provided to District personnel along with the associated mesh bathymetry/topography. District personnel were also provided with a section of the existing ADCIRC mesh (fort.14 file) for their geographic region to aid with the selection and visualization of save points. Providing the mesh helped to ensure that important District projects were included and adequately resolved within the mesh. Mesh enhancements were made based on District feedback. An example showing seven of the requested the U.S. Army District, Philadelphia (NAP) save point locations at New Jersey inlets is shown in Figure 6-14. The ADCIRC mesh resolution for these inlets ranges from 70-200 meters.

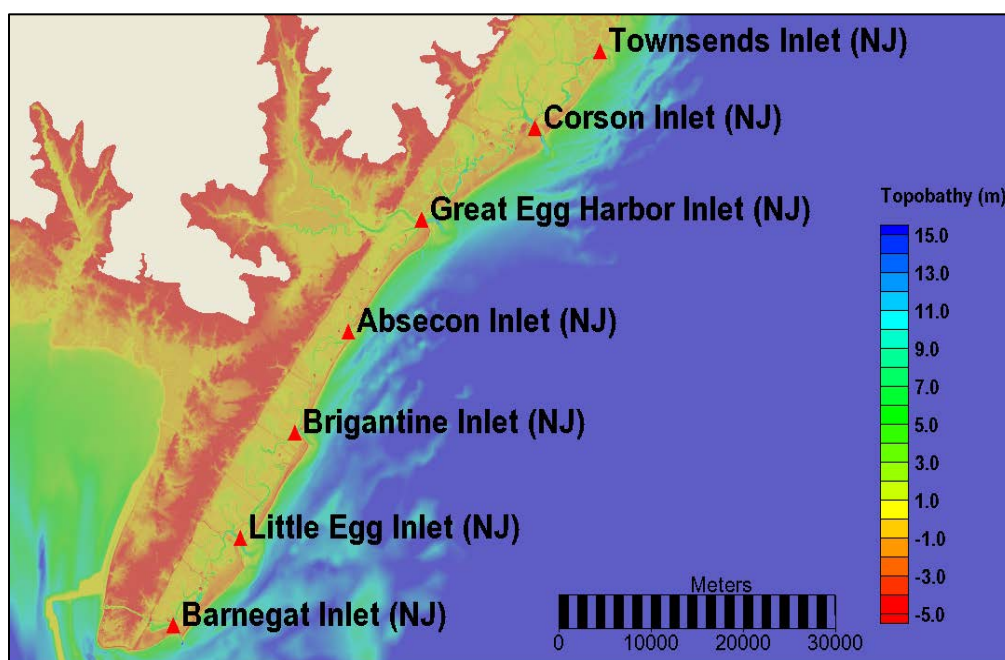


Figure 6-14. NAP save point locations at 7 inlets in New Jersey; the ADCIRC mesh resolution for these inlets ranges from 70-200 meters.

In addition to the District save point locations, all of the regional NOAA water level gages, WIS stations (Wave Information Studies; <http://chl.erdc.usace.army.mil/wis/>), and National Data Buoy Center (NDBC) buoy locations are also included in the save points set. Table 6-2 provides information regarding the save points. The total number of save points is 18,977. Figure 6-15 through Figure 6-20 show an overview of the save points from Maine to Virginia.

Table 6-2. Save points.

Name	Number of Save Points
NAE Points	342
NAE Contour Points	3,142
NAN Points	240
NAN Contour Points	1,620
NAP Points	40
NAP Contour Points	448
NAB Points	369
NAB Contour Points	132
NAO Points	64
NAO Contour Points	383
WIS	247
NERACOOS	94
NOAA	730
ERDC	11,123
Canada	3
<b>Total</b>	<b>18,977</b>

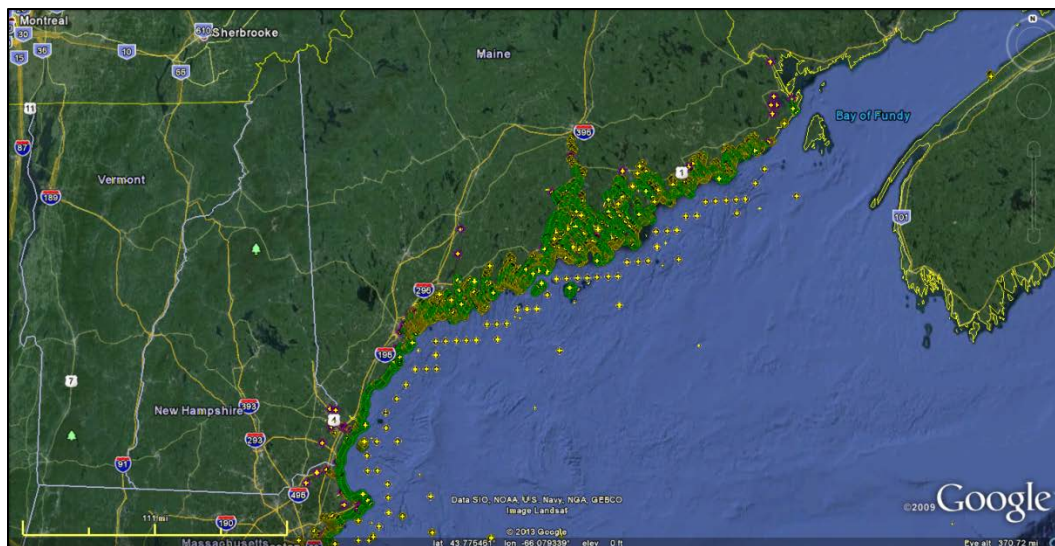


Figure 6-15. High-frequency save points, shown as black dots, in Maine and New Hampshire.

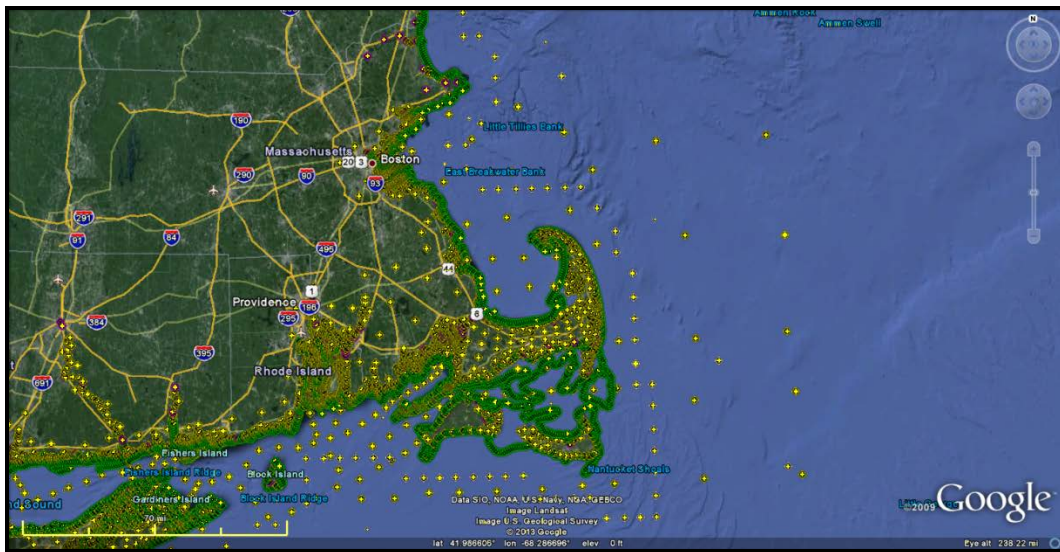


Figure 6-16. High-frequency save points, shown as black dots, in Massachusetts and Rhode Island.



Figure 6-17. High-frequency save points, shown as black dots, in Connecticut and New York.

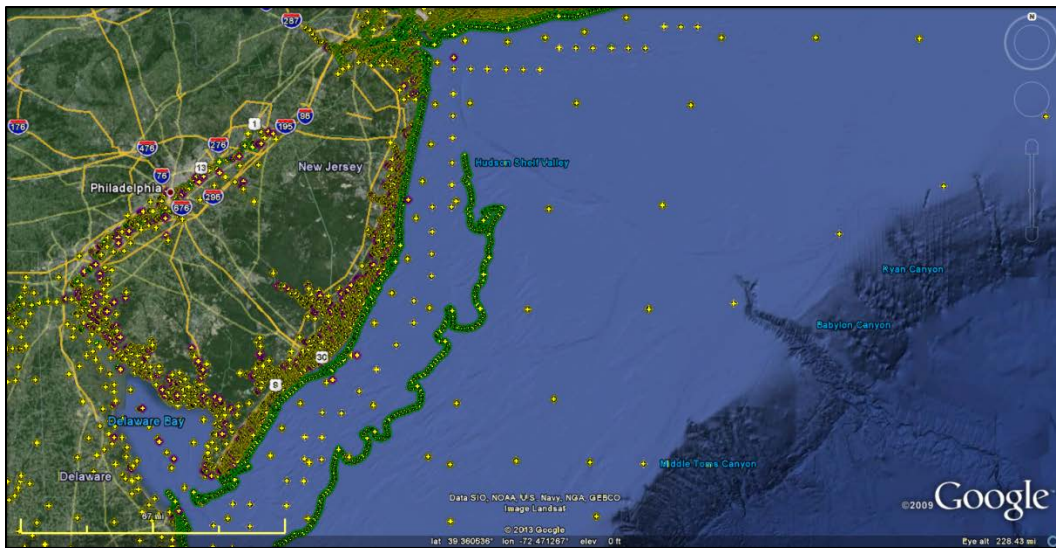


Figure 6-18. High-frequency save points, shown as black dots, in New Jersey.

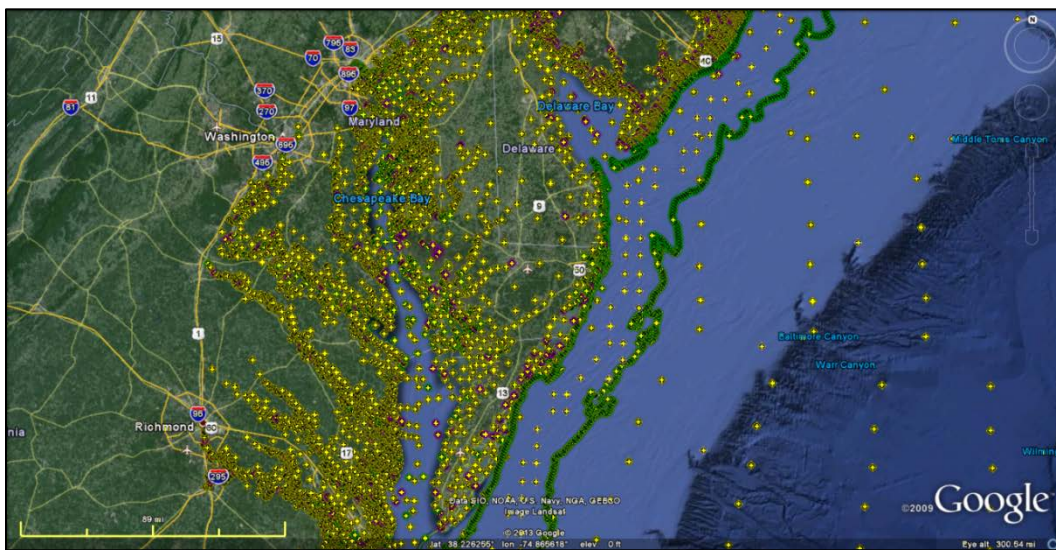


Figure 6-19. High-frequency save points, shown as black dots, in Delaware and Maryland.

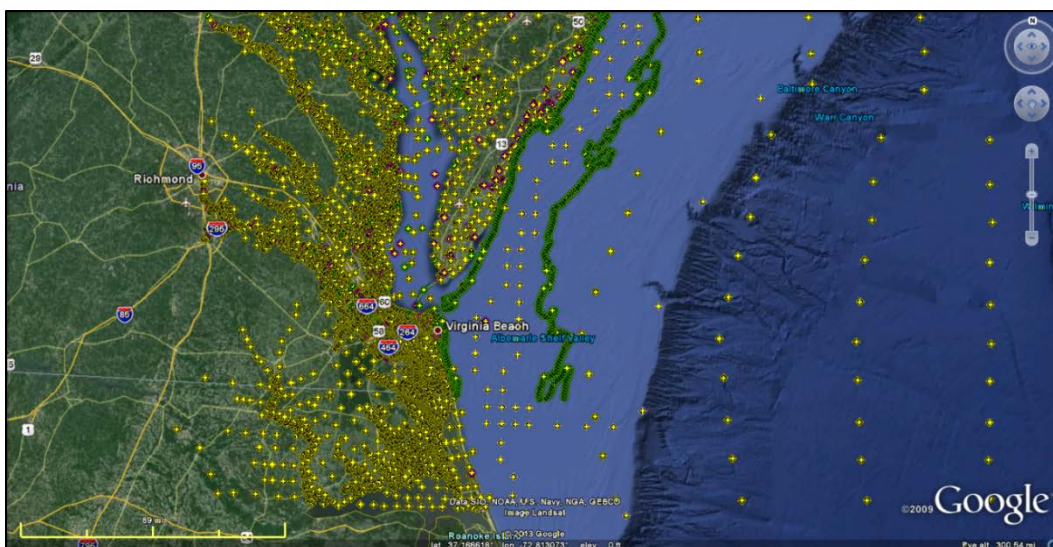


Figure 6-20. High-frequency save points, shown as black dots, in Virginia.

Approximately 11000 additional save points along the shorelines and main channels of the Atlantic coast from Virginia to Maine are also included within the save points set; referred to in Table 6-2 as the “ERDC” save points. The purpose of the ERDC save points set is to provide frequent nearshore time series information for a smaller subset of points that would be more easily accessible than the global solution files. This data may be useful for applications involving future projects and further statistical analyses. The ERDC save points were placed along bathymetric elevation contours of 1 m, 2 m, and 3 m with the majority focus on the 3 m contour.

## 6.7 Model Validation

### 6.7.1 General Considerations

Validation was performed to ensure ADCIRC adequately predicts the hydrodynamics of the study area. Accuracy of a model is influenced by the accuracy of the forcing functions specified at open-water boundaries, representation of the geometry of the study area (i.e., bathymetry and shoreline), errors induced by the truncated terms associated with the governing equations, and to values selected for model parameters, such as the bottom friction and lateral eddy coefficients. A satisfactory comparison between predictions and measurements in the validation procedure provides confidence that the model adequately replicates hydrodynamic processes. The validation procedure accomplished for this study included a harmonic analysis to ensure that the model is responding correctly to astronomical

forcing and a comparison of model to measurements for seven storm conditions to ensure that the model is responding to meteorological forcing.

### **6.7.2 Harmonic Analysis**

With the initial version of the ADCIRC mesh completed, the hydrodynamic model underwent preliminary testing to insure model stability and general performance when forced with only tidal conditions.

A tidal forcing boundary condition was defined at the offshore boundary, all island and mainland boundaries were developed, and a long-term (60-day) tidal simulation was performed on the Cray Xe6 (Garnet) supercomputer. Time-varying tidal elevations specified at nodes along the open ocean boundaries were synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Constituent information was extracted from a database developed from the TOPEX 7 satellite measurements. Because the model domain is of sufficient size that celestial attraction induces tide within the mesh proper, tide-generating potential functions were included in the simulations, and correspond to the constituents listed above. The 60-day tidal simulation included a 15-day tidal spin-up time period and a 45-day time period for the harmonic analysis. The harmonic analysis of the last 45 days of the simulation was conducted to compare the NOAA-synthesized constituent amplitudes and epochs with the ADCIRC-computed amplitudes and epochs at 143 NOAA gage locations.

Based on the initial tidal harmonic analysis, the NACCS ADCIRC mesh underwent updates due to the under-prediction of tides in the Gulf of Maine. A first attempt at increasing the tide range in the Gulf of Maine was to drive more water into this region by extending the offshore boundary from the initial VDATUM offshore boundary for the north portion of the mesh to the traditional East Coast ADCIRC mesh boundary, which follows the 60-deg West longitude. The additional volume of water did not produce a noticeable change in the tide range at the Gulf of Maine gage locations.

The second attempt at increasing the tide range in the Gulf of Maine was to examine the bathymetry in the Gulf of Maine and Bay of Fundy. In the early stages (June/July 2013 timeframe) of the NACCS mesh development, ERDC CHL provided input to the University of Oklahoma (UO) to improve their efforts to update the East Coast tidal database. In turn, UO contacted NOAA's VDatum developers which led to a NOAA update to the

Gulf of Maine bathymetry in August 2013. The update to the Gulf of Maine bathymetry was relayed back to ERDC CHL in December 2013 and incorporated into the NACCS ADCIRC mesh. Tidal prediction in the Gulf of Maine improved with the updated bathymetry as shown for the Portland, Maine station (Figure 6-21). Tidal harmonic analysis results at several other gage locations from Maine to North Carolina are shown in Figure 6-22 to Figure 6-26. Comparison of model and measurements shows excellent correlations at most locations.

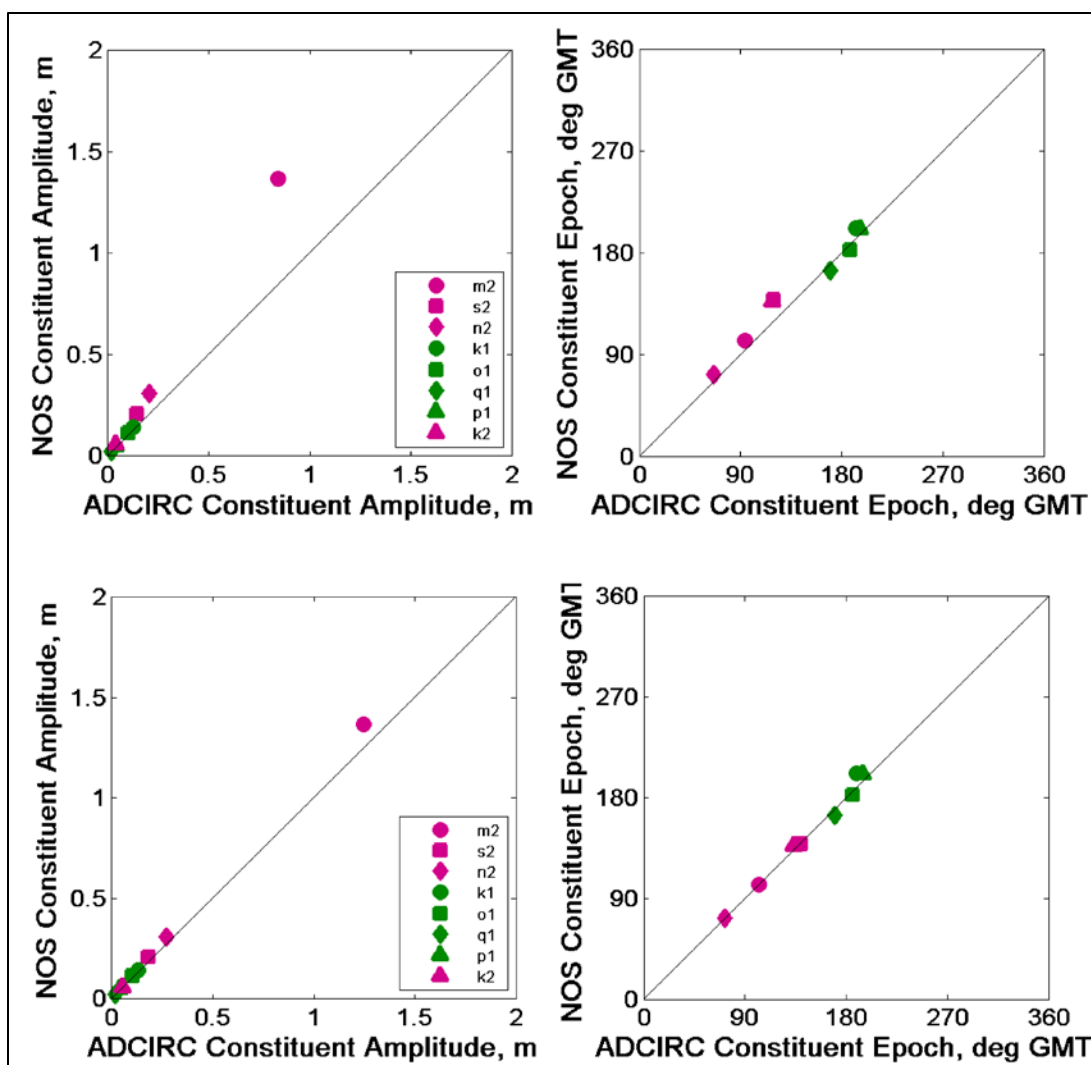


Figure 6-21. Tidal harmonic analysis for Portland, Maine gage top) before and bottom) after Gulf of Maine bathymetric correction.

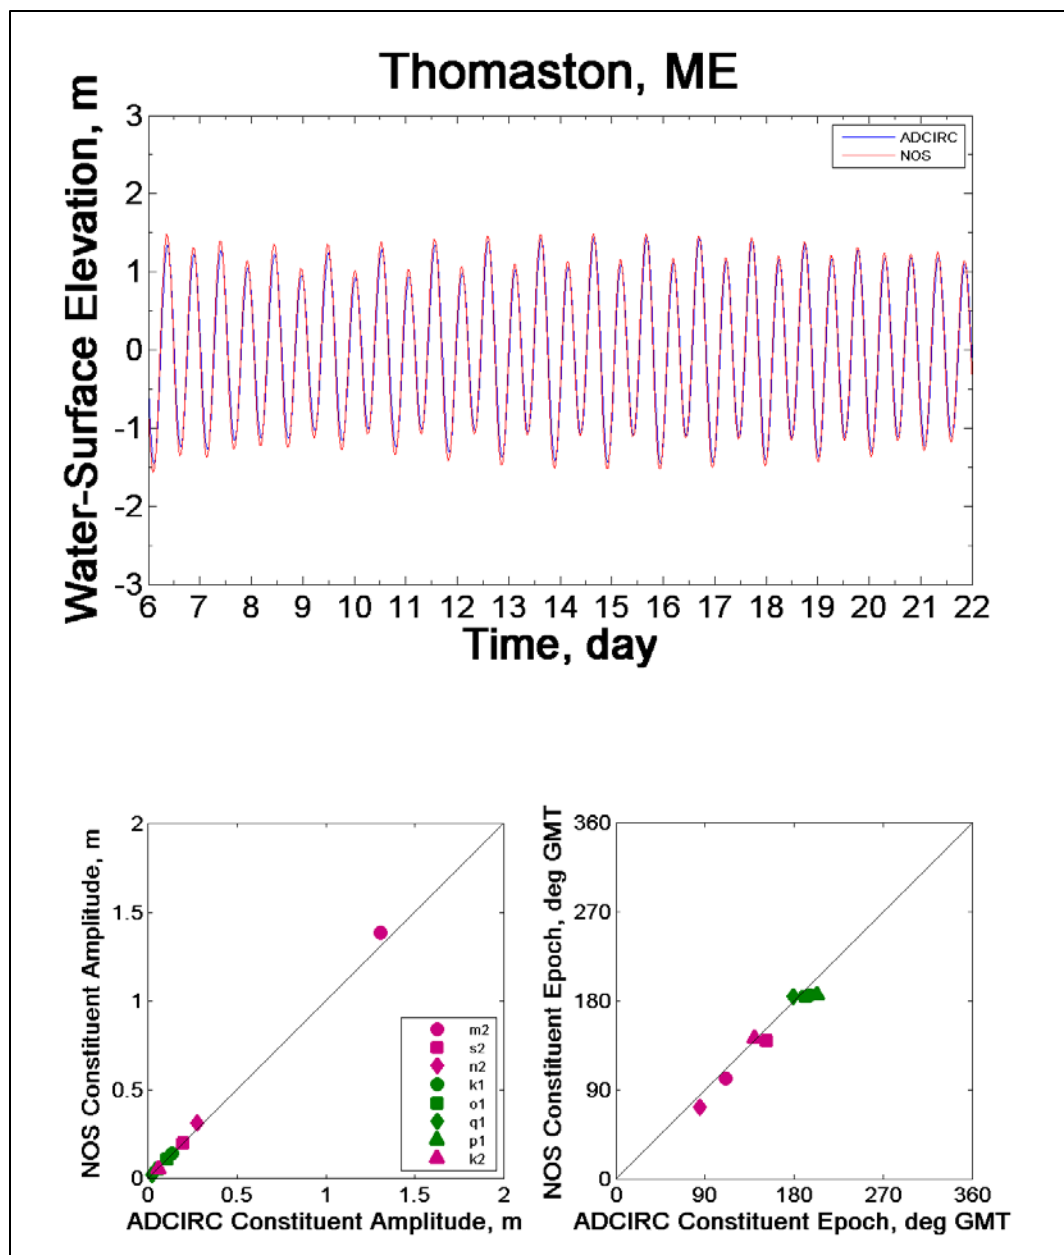


Figure 6-22. Tidal harmonic analysis for Thomaston, Maine.

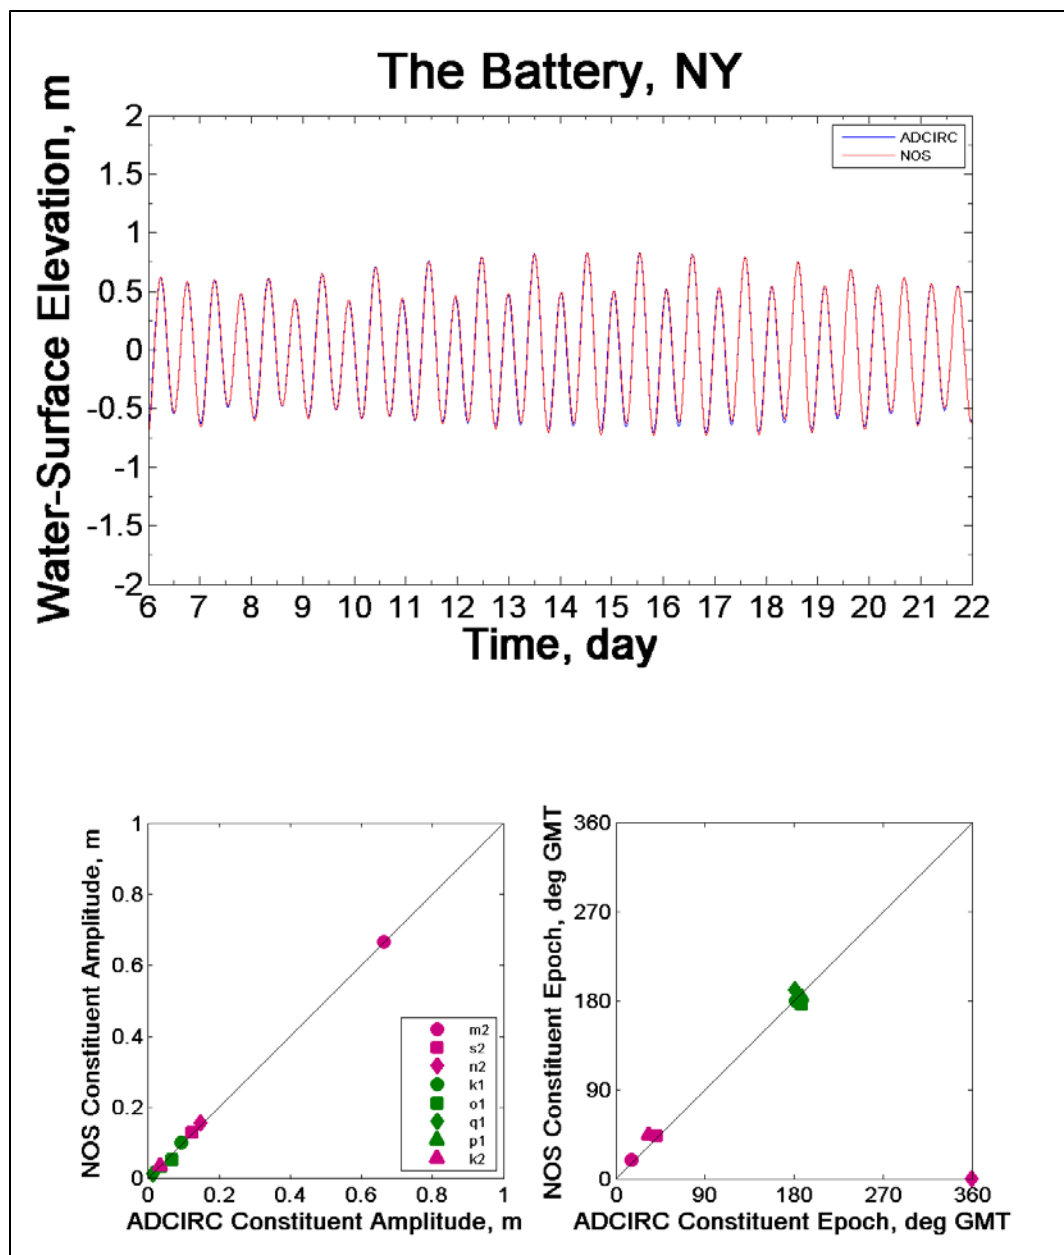


Figure 6-23. Tidal harmonic analysis for The Battery, New York.

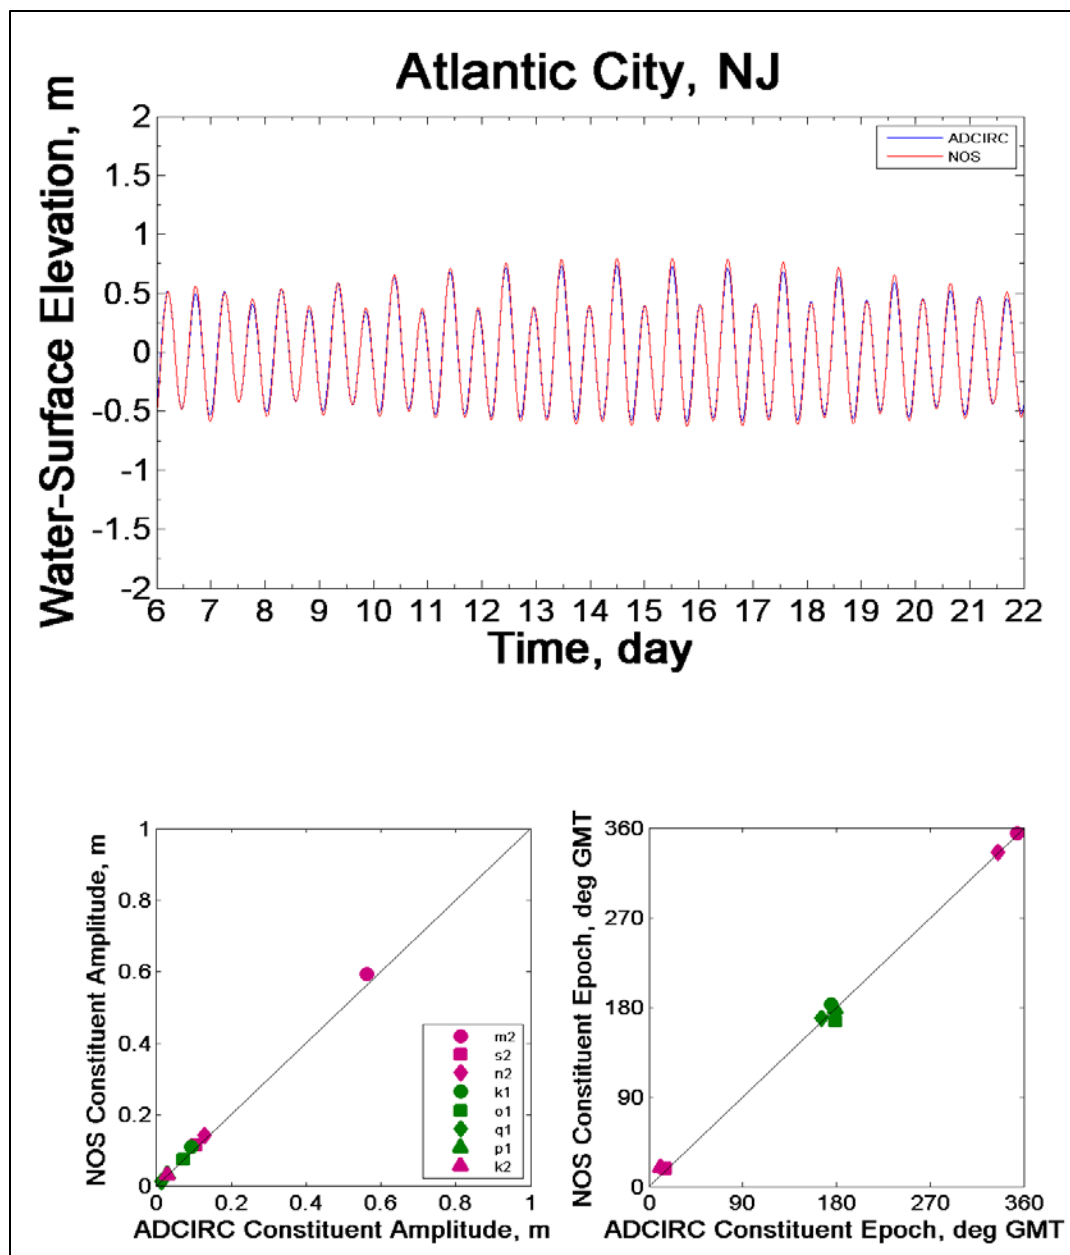


Figure 6-24. Tidal harmonic analysis for Atlantic City, NJ.

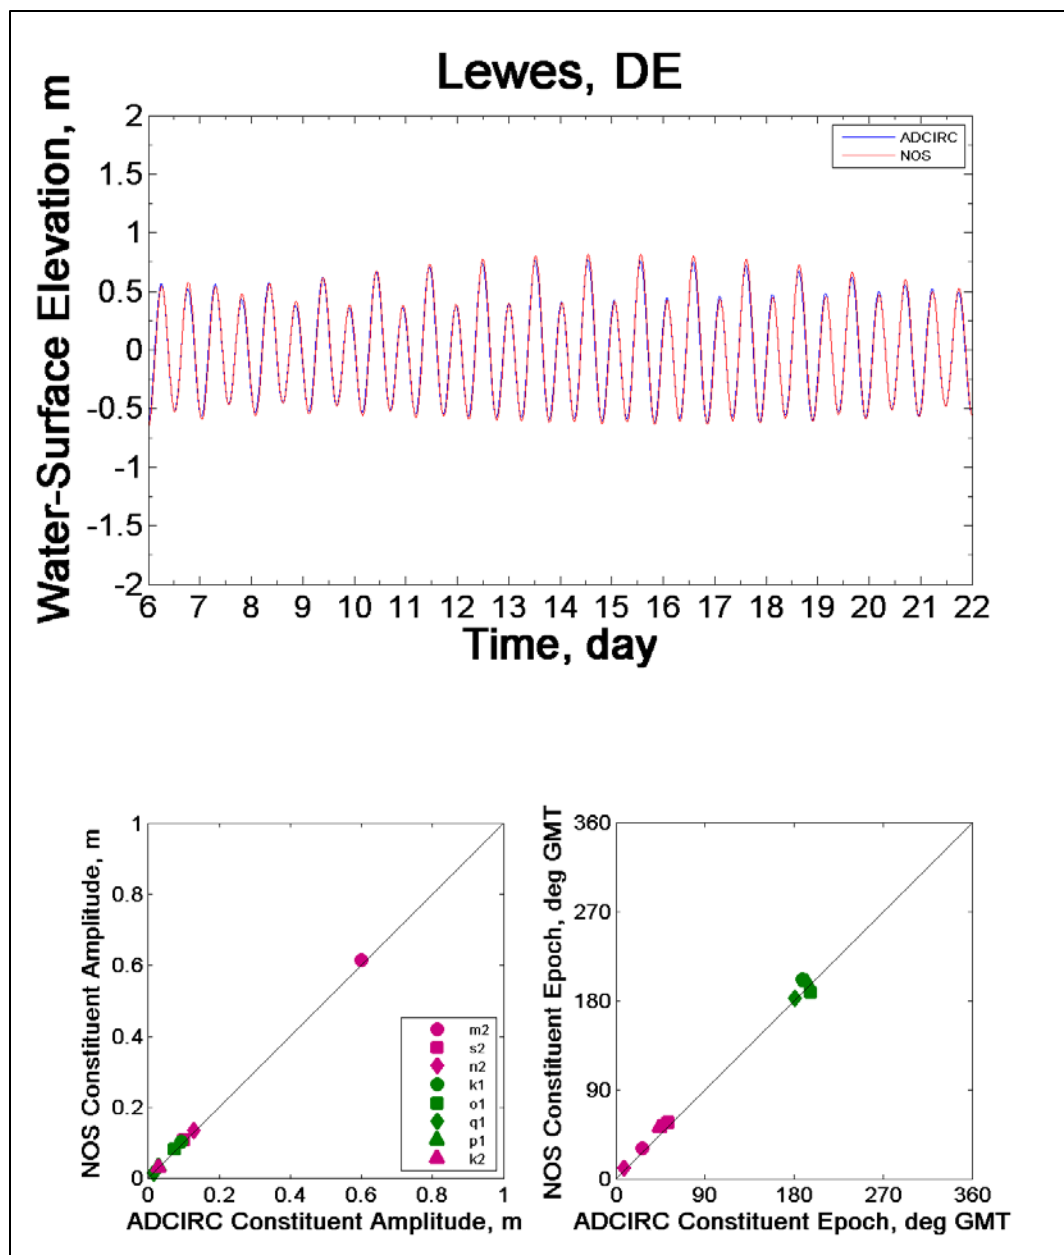


Figure 6-25. Tidal harmonic analysis for Lewes, Delaware.

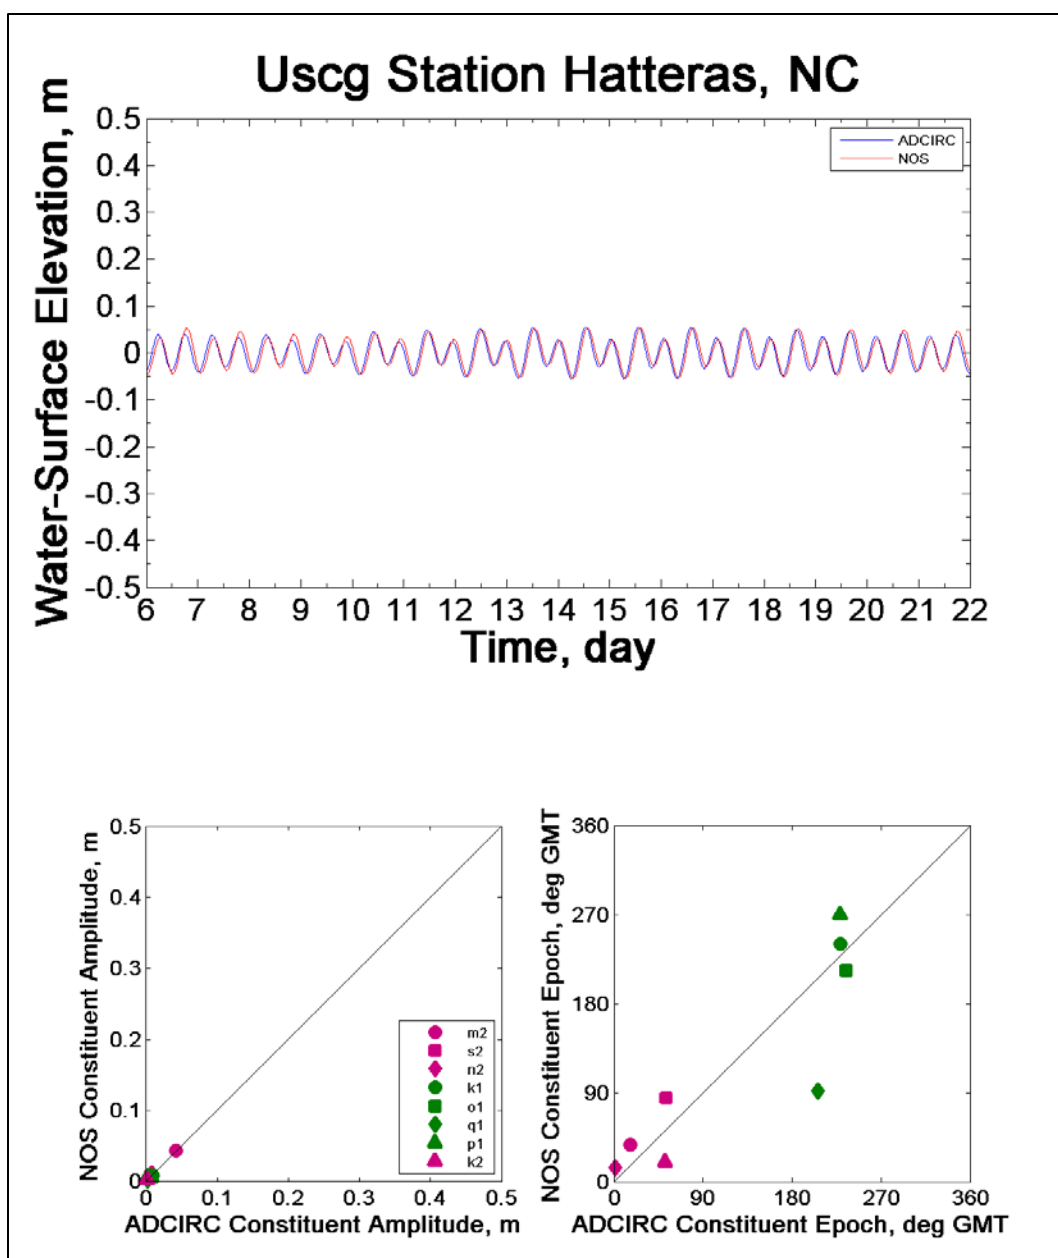


Figure 6-26. Tidal harmonic analysis for the US Coast Guard Station, Hatteras, NC.

### 6.7.3 Model Validation

Validation storms were selected based on the availability of wind and pressure fields along with sufficient measured water level and wave data in order to compare with model results. Storm wind and pressure fields for 8 tropical validation simulations were obtained from available sources/studies including an in-house project (Isabel), a University of North Carolina project (Irene), directly from OWI (Sandy), FEMA Region

II (1938, 1944, Donna, and Gloria) and FEMA Region III (Josephine) studies. The green box in Figure 6-27 shows the extent of the fine resolution winds for the FEMA Region II tropical storms (1938, 1944, Donna, and Gloria). The blue box indicates the limits of the fine resolution winds for Josephine and Isabel. The orange and black boxes indicate the limits of the fine resolution winds for Irene and Sandy, respectively. For the NACCS, fine resolution winds were developed by OWI within the red box and covered the entire area from Virginia to Maine. Basin scale winds (latitude range: 22 to 48 North; longitude range: 58 to 82 West) were also provided by OWI for every storm and are discussed in the OWI contractor report and the Winds section of this report.

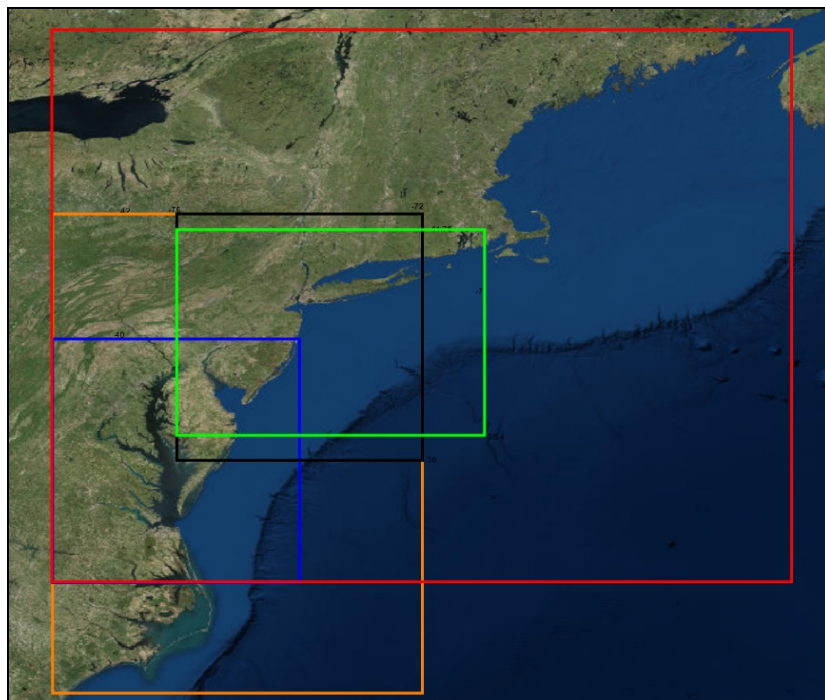


Figure 6-27. Fine resolution wind domains for validation storms and NACCS.

Validation of the ADCIRC mesh and input parameters was first accomplished with the simulation and analysis of the aforementioned 8 tropical storms as well as 12 extratropical storms. Not all of these storms were included as part of the model validation, but were simply simulated to search for any potential model application issues. Of the 20 initial validation storms simulated for stability testing, a detailed analysis was performed with a focus on Sandy, Irene, Isabel, Josephine and Gloria because those storms have the greatest number of water level gages available within the corresponding detailed wind domain and they occurred in the most

recent past. In addition, analysis of two extratropical storms (ET070 and ET073), including The North American Blizzard of 1996, was performed based on available measurements to compare with model results.

ADCIRC model simulations under combined astronomical and meteorological conditions were completed for seven hindcast simulations of tropical and extratropical events as part of the validation process. Tide, river, wind, pressure, and wave forcing contributions to water level were included in all validation simulations. Storm simulations were initiated with a 16-day tidal spin-up, with the exception of Hurricane Sandy, which had a 13.5-day tidal spin-up, and continued with the application of basin and regional-scale winds and pressures for each event. Each storm also included a steric water level adjustment for the time period of that event derived from the historic steric height adjustment values for the gages as discussed in steric height adjustment section. Details of each of the validation simulations are reported herein.

#### 6.7.3.1 Hurricane Gloria

Hurricane Gloria was simulated for the period beginning September 12, 1985 at 12:00 Greenwich Mean Time (GMT) and concluding at September 28, 1985 at 18:00. Gloria originated from a tropical wave on September 16, 1985 in the eastern Atlantic Ocean. (Figure 6-28 shows the path of each of the validation events.) After remaining a weak tropical cyclone for several days, Gloria intensified into a hurricane on September 22, 1985. Gloria quickly intensified on September 24 1985, and the next day reached peak winds of 230 km/hr (145 mph). The hurricane weakened before striking the Outer Banks of North Carolina on September 27. Later that day, Gloria made two subsequent landfalls on Long Island and later western Connecticut, before becoming an extratropical storm on September 28, 1985 over New England. A 1-sec time-step was used in the simulation, and a 16-day ramping function was applied to the tidal signal and the wind fields at the beginning of the simulations in order to prevent generating spurious modes of oscillation by starting the model under full forcing. Time-varying tidal elevations corresponding to the 16.25-day simulation time period were specified at nodes along the open ocean boundaries, and synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Constituent information was extracted from a database developed from the TOPEX 7 satellite measurements. Wind fields available for the 09/26/85 through 09/28/85 time period were supplied to the model and were developed by Oceanweather, Inc (OWI). This OWI data included

hourly wind components and pressures at 0.25-deg spacing for the basin scale region, bounded by latitude range 22 to 48 North; and longitude range 58 to 82 West. The detailed resolution winds were at a 0.05-deg spacing, bounded by latitude range 38.4 to 41.75 North; and longitude range 71 to 76 West.

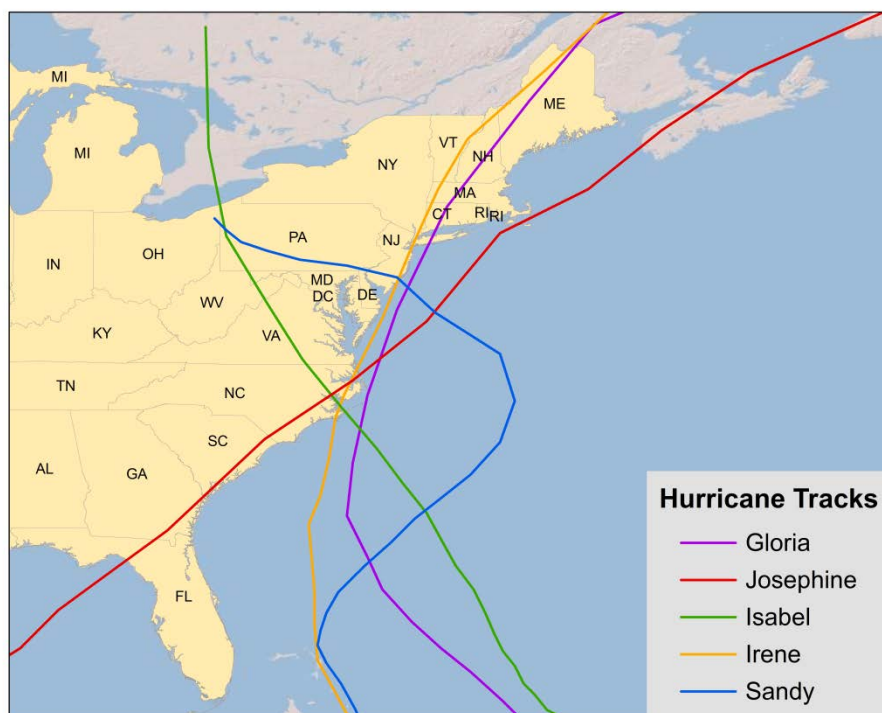


Figure 6-28. Paths of tropical validation storms.

Time-series of measured NOAA/NOS water-surface elevations were obtained at 39 stations for the validation time period (Figure 6-29). Figure 6-30 displays a comparison of modeled and measured time-series of water-surface elevation for the Atlantic City gage (8534720) from 26-30 Sep 1985, which included Hurricane Gloria. The time-series of measured water levels shows that wind has a significant influence on water levels in the study area. Astronomical tides at this location are approximately 1.4 m during this event, whereas with wind, water levels varied 2.7 m during the validation period. (Note that wind can also suppress the sinusoidal oscillations of the astronomical tide as shown after the surge peak.) Overall, the 1985 Hurricane Gloria ADCIRC simulation reproduced measured water levels fairly well. Figure 6-30 shows that wind has a significant influence on water level, both amplifying and suppressing water level as storm systems pass through the region. The model-to-measurement compari-

sons show that ADCIRC generally performs well and reproduces the overall water level response, but does not capture the fine details that would require winds and pressures being produced at a scale finer than those used in this validation simulation.

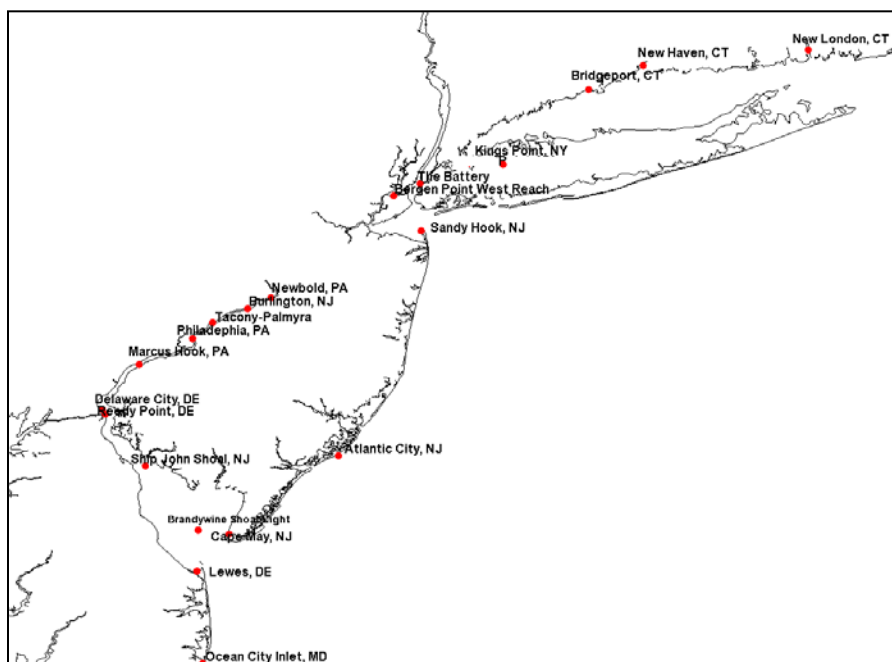


Figure 6-29. NOAA station locations.

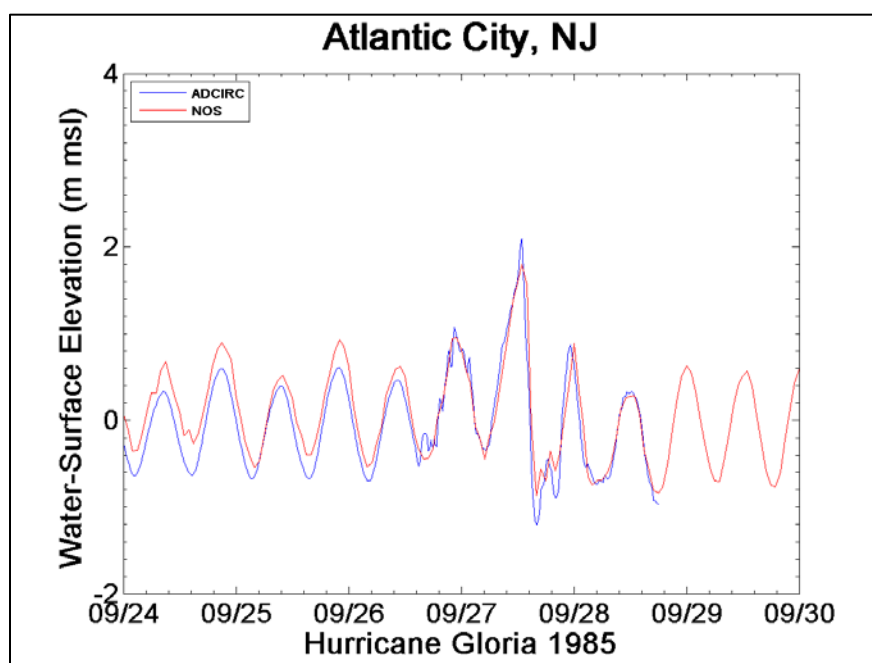


Figure 6-30. Hurricane Gloria time series comparison at Atlantic City, New Jersey.

### 6.7.3.2 Hurricane Josephine

Hurricane Josephine was simulated for the period beginning September 20, 1996 at 00:00 Mean Time (GMT) and concluding October 12, 1996 at 00:00. Tropical Storm Josephine was an unusual Atlantic tropical storm that moved from west to east across the Gulf of Mexico in October 1996. It formed on October 4, 1996 as a tropical depression from the remnants of a cold front. Early in its duration, the system interacted with a ridge over the central United States, which produced strong winds and high tides along the Texas coast. Moving generally to the east due to a trough, the depression intensified into a tropical storm on October 6, 1996, and the next day reached peak winds of 70 mph (110 km/h) while approaching the west coast of Florida. Josephine made landfall in Taylor County near peak intensity early on October 8, 1996, and soon after became an extratropical event. A 1-sec time-step was used in the simulation, and a 16-day ramping function was applied to the tidal signal and the wind fields at the beginning of the simulations in order to prevent generating spurious modes of oscillation by starting the model under full forcing. Time-varying tidal elevations corresponding to the 22-day simulation time period were specified at nodes along the open ocean boundaries, synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Constituent information was extracted from a database developed from the TOPEX 7 satellite measurements. Wind fields for the 10/04/96 through 10/12/96 time period were supplied to the model and were developed by Oceanweather, Inc (OWI). This OWI data included hourly wind components and pressures at 0.25-deg spacing for the basin scale region, bounded by latitude range 22 to 48 North; and longitude range 58 to 82 West. The detailed resolution winds were at a 0.025-deg spacing, bounded by latitude range 36 to 40 North; and longitude range 74 to 78 West.

Time-series of measured NOAA/NOS water-surface elevations were obtained at 41 stations for the validation time period. Figure 6-31 displays a comparison of modeled and measured time-series of water-surface elevation for the Lewes, Delaware Station (8557380) from the 5-11 Oct 1996, which included Hurricane Josephine. The time-series of measured water levels shows that wind has a significant influence on water levels in the study area. Astronomical tides at this location are approximately 1 m during the validation period, whereas with wind, water levels varied 1.65 m during the validation period. Overall, the 1996 Hurricane Josephine model simulation reproduced measured water levels fairly well, but there is a

0.1 m positive bias in the model prior to the storm peak and a 0.1 m negative bias after the storm peak.

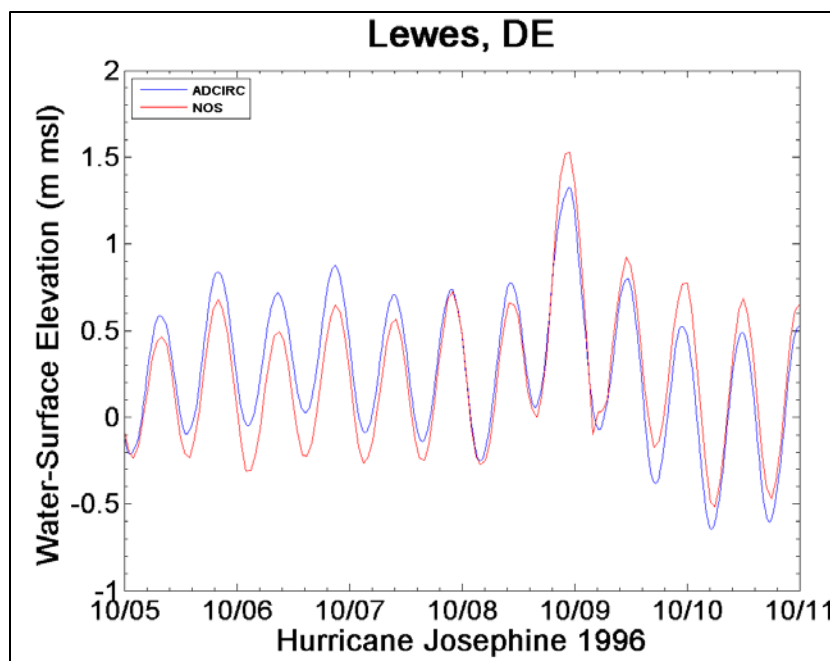


Figure 6-31. Hurricane Josephine time series comparison at Lewes, Delaware.

#### 6.7.3.3 Hurricane Isabel

Hurricane Isabel was simulated for the period beginning August 31, 2003 at 00:00 Greenwich Mean Time (GMT) and concluding at September 20, 2003 at 00:00. Isabel formed near the Cape Verde Islands from a tropical wave on September 6, 2003 in the tropical Atlantic Ocean. It moved northwestward, and within an environment of light wind shear and warm waters it steadily strengthened to reach peak winds of 165 mph (265 km/h) on September 11, 2003. After fluctuating in intensity for four days, Isabel gradually weakened and made landfall on the Outer Banks of North Carolina with winds of 105 mph (165 km/h) on September 18, 2003. It quickly weakened over land and became extratropical over western Pennsylvania the next day. A 1-sec time-step was used in the simulation, and a 16-day ramping function was applied to the tidal signal and the wind fields at the beginning of the simulations in order to prevent generating spurious modes of oscillation by starting the model under full forcing. Time-varying tidal elevations corresponding to the 20-day simulation time period were specified at nodes along the open ocean boundaries, synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Con-

stituent information was extracted from a database developed from the TOPEX 7 satellite measurements. Wind fields for the 09/14/03 through 09/20/03 time period were supplied to the model and were developed by Oceanweather, Inc (OWI). This OWI data included hourly wind components and pressures at 0.25-deg spacing for the basin scale region, bounded by latitude range 22 to 48 North; and longitude range 58 to 82 West. The detailed resolution winds were at a 0.025-deg spacing, bounded by latitude range 36 to 40 North; and longitude range 74 to 78 West.

Time-series of measured NOAA/NOS water-surface elevations were obtained at 60 stations for the validation time period. Figure 6-32 displays a comparison of modeled and measured time-series of water-surface elevation for the Duck, North Carolina Station (8651370) from the 15-21 Sep 2003, which included Hurricane Isabel. The time-series of measured water levels shows that wind has a significant influence on water levels in the study area. Astronomical tides at this location are approximately 0.9 m during the validation time period, whereas with wind, water levels varied 1.95 m during the validation period. Overall, the 2003 Hurricane Isabel model simulation reproduced measured water levels fairly well.

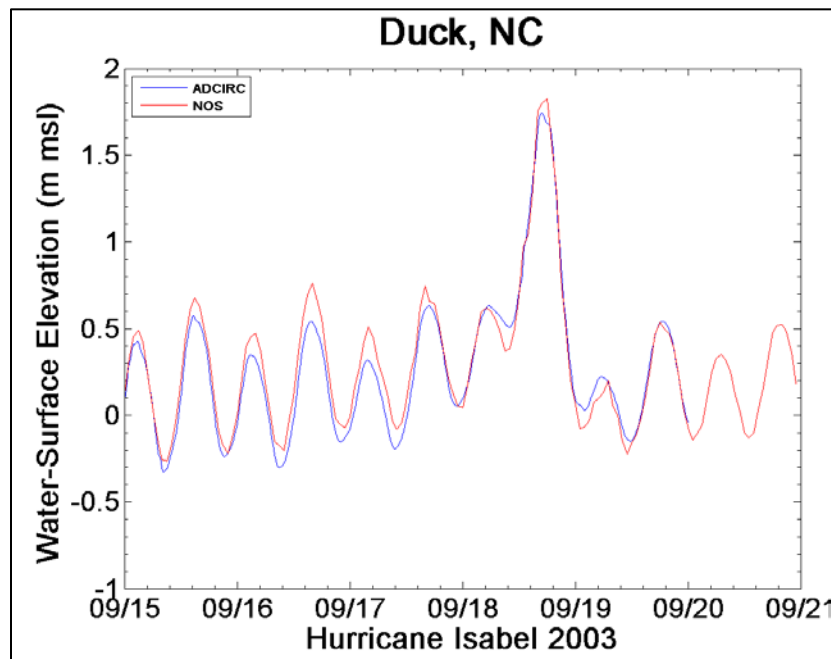


Figure 6-32. Hurricane Isabel time series comparison at Duck, North Carolina.

#### 6.7.3.4 Hurricane Irene

Hurricane Irene was simulated for the period beginning August 6, 2011 at 00:00 Greenwich Mean Time (GMT) and concluding at August 30, 2011 at 00:00. Irene originated from a well-defined Atlantic tropical wave that began showing signs of organization east of the Lesser Antilles. Due to development of atmospheric convection and a closed center of circulation, the system was designated as Tropical Storm Irene on August 20, 2011. After intensifying, Irene made landfall in St. Croix as a strong tropical storm later that day. Early on August 21, the storm made a second landfall in Puerto Rico. While crossing the island, Irene strengthened into a Category 1 hurricane. The storm paralleled offshore of Hispaniola, continued to slowly intensify in the process. Shortly before making four landfalls in the Bahamas, Irene peaked as a 120 mph (195 km/h) Category 3 hurricane. Thereafter, the storm slowly leveled-off in intensity as it struck the Bahamas and then curved northward after passing east of Grand Bahama. Continuing to weaken, Irene was downgraded to a Category 1 hurricane before making landfall on the Outer Banks of North Carolina on August 27, 2013, becoming the first hurricane to make landfall in the United States since Hurricane Ike in 2008. Early on the following day, the storm re-emerged into the Atlantic from southeastern Virginia. Although Irene remained a hurricane over land, it weakened to a tropical storm while making yet another landfall in the Little Egg Inlet in southeastern New Jersey on August 28, 2013. A few hours later, Irene made its ninth and final landfall in Brooklyn, New York City. Early on August 29, 2013, Irene transitioned into an extratropical cyclone hitting Vermont/New Hampshire after remaining inland as a tropical cyclone for less than 12 hours. A 1-sec time-step was used in the simulation, and a 16-day ramping function was applied to the tidal signal and the wind fields at the beginning of the simulations in order to prevent generating spurious modes of oscillation by starting the model under full forcing. Time-varying tidal elevations corresponding to the 26-day simulation time period were specified at nodes along the open ocean boundaries, synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Constituent information was extracted from a database developed from the TOPEX 7 satellite measurements. Wind fields for the 08/20/11 through 08/30/11 time period were supplied to the model and were developed by Oceanweather, Inc (OWI). This OWI data included hourly wind components and pressures at 0.25-deg spacing for the basin scale region, bounded by latitude range 22 to 48 North; and longitude range 58 to 82 West. The detailed resolution winds were at a 0.05-deg

spacing, bounded by latitude range 34 to 42 North; and longitude range 72 to 78 West.

Time-series of measured NOAA/NOS water-surface elevations were obtained at 60 stations for the validation time period. Figure 6-33 displays a comparison of modeled and measured time-series of water-surface elevation for the Chesapeake Bay Bridge Tunnel Station (8638863) from the 26-30 August 2011, which included Hurricane Irene. The time-series of measured water levels shows that wind has a significant influence on water levels in the study area. Astronomical tides at this location are approximately 0.9 m during the validation time period, whereas with wind, water levels varied 1.8 m during the validation period. Overall, the 2011 Hurricane Irene model simulation reproduced measured water levels well.

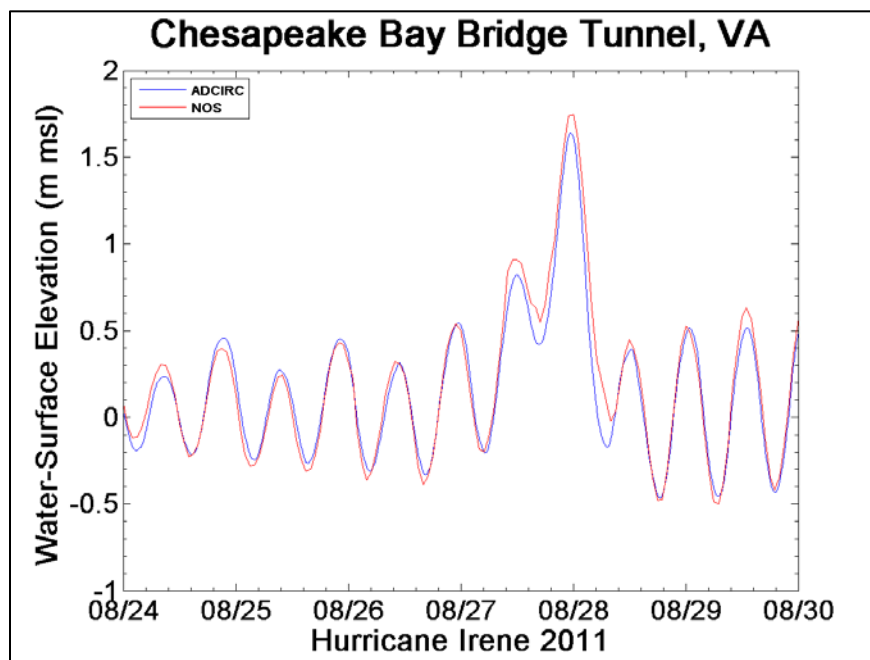


Figure 6-33. Hurricane Irene time series comparison at Chesapeake Bay Bridge Tunnel, Virginia.

#### 6.7.3.5 Hurricane Sandy

Hurricane Sandy was simulated for the period beginning October 11, 2012 at 12:00 Greenwich Mean Time (GMT) and concluding at November 1, 2012 at 00:00. Sandy developed from a tropical wave in the western Caribbean Sea on October 22, 2012, quickly strengthened, and was upgraded to Tropical Storm Sandy six hours later. Sandy moved slowly northward toward the Greater Antilles and gradually intensified. On October 24,

2012, Sandy became a hurricane, made landfall near Kingston, Jamaica, re-emerged a few hours later into the Caribbean Sea and strengthened into a Category 2 hurricane. On October 25, 2012, Sandy hit Cuba as a Category 3 hurricane, and then weakened to a Category 1 hurricane. Early on October 26, 2012, Sandy moved through the Bahamas. On October 27, 2012, Sandy briefly weakened to a tropical storm and then re-strengthened to a Category 1 hurricane. Early on October 29, 2012, Sandy curved north-northwest and then moved ashore near Brigantine, New Jersey, just to the northeast of Atlantic City, as a post-tropical cyclone with hurricane-force winds. During the next two days, Sandy's remnants drifted northward and then northeastward over Ontario, before merging with another low-pressure area over Eastern Canada. A 1-sec time-step was used in the simulation, and a 13.5-day ramping function was applied to the tidal signal and the wind fields at the beginning of the simulations in order to prevent generating spurious modes of oscillation by starting the model under full forcing. Time-varying tidal elevations corresponding to the 20.5-day simulation time period were specified at nodes along the open ocean boundaries, synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Constituent information was extracted from a database developed from the TOPEX 7 satellite measurements. Wind fields for the 10/25/12 through 11/01/12 time period were supplied to the model and were developed by Oceanweather, Inc (OWI). This OWI data included hourly wind components and pressures at 0.25-deg spacing for the basin scale region, bounded by latitude range 22 to 48 North; and longitude range 58 to 82 West.

Time-series of measured NOAA/NOS water-surface elevations were obtained at 57 stations for the validation time period. Figure 6-34 displays a comparison of modeled and measured time-series of water-surface elevation for The Battery, New York Station (8518750) from 27 Oct - 2 Nov 2012, which included Hurricane Sandy. The time-series of measured water levels shows that wind has a significant influence on water levels in the study area. Astronomical tides at this location are approximately 1.7 m during the validation period, whereas with wind, water levels varied 3.7 m during the validation period. Overall, the 2012 Hurricane Sandy model simulation reproduced measured water levels well.

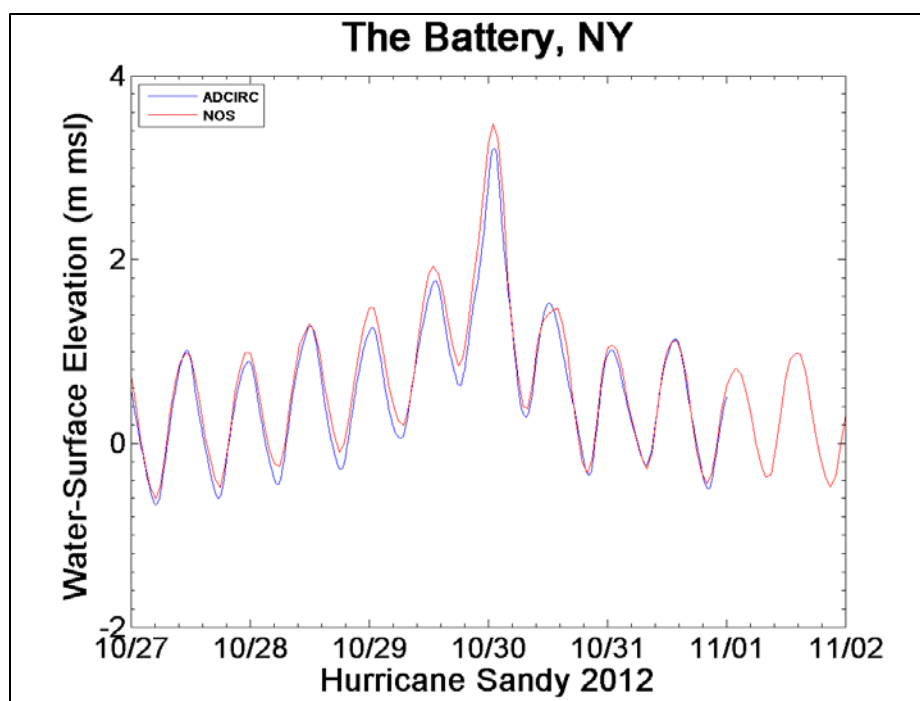


Figure 6-34. Hurricane Sandy time series comparison at The Battery, NY.

One noted exception is the over-prediction of the storm peak at Atlantic City, New Jersey (Figure 6-35) for the Hurricane Sandy model simulation. This discrepancy in water level prediction at Atlantic City, New Jersey was also reported by other researchers at the USGS Workshop (June 2014, Staten Island, NY). Because the model performs well at this location for other storms and in the tidal harmonic analysis, the mesh resolution and gage placement in the model were ruled out as potential causes of the discrepancy. Because the inferior performance is related to a specific event, the cause can be attributed to the forcing conditions or a malfunction in the measurement device. Many other gages, including two that bracket the Atlantic City gage (Sandy Hook and Brandywine Shoal Light) failed around this same time period. Because others have experienced the same discrepancy in their model -to-measurement comparison at Atlantic City, because the surrounding gages failed during the event, and considering the magnitude of this event, it is our contention that the discrepancy at this location is due to gage malfunctioned.

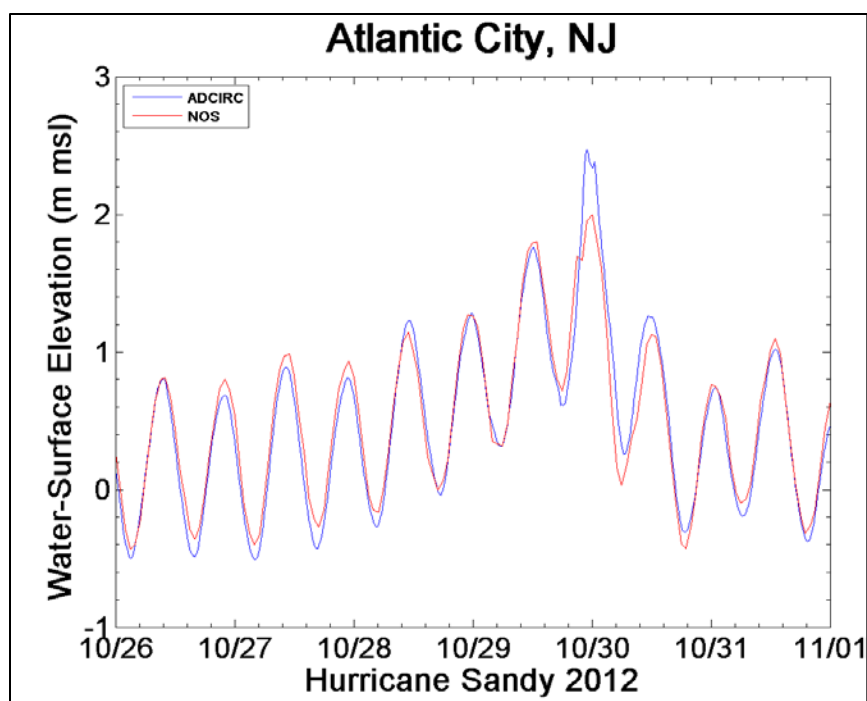


Figure 6-35. Hurricane Sandy time series comparison at Atlantic City, NJ.

#### 6.7.3.6 ET070

ET070, also known as, The North American Blizzard of 1996, was simulated for the period beginning December 20, 1995 at 00:00 Greenwich Mean Time (GMT) and concluding at January 11, 1996 at 00:00. A 1-sec time-step was used in the simulation, and a 16-day ramping function was applied to the tidal signal and the wind fields at the beginning of the simulations in order to prevent generating spurious modes of oscillation by starting the model under full forcing. Time-varying tidal elevations corresponding to the 22-day simulation time period were specified at nodes along the open ocean boundaries, synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Constituent information was extracted from a database developed from the TOPEX 7 satellite measurements. Wind fields for the 01/03/96 through 01/11/96 time period were supplied to the model and were developed by Oceanweather, Inc (OWI). This OWI data included hourly wind components and pressures at 0.25-deg spacing for the basin scale region, bounded by latitude range 22 to 48 North; and longitude range 58 to 82 West.

Time-series of measured NOAA/NOS water-surface elevations were obtained at 38 stations for the validation time period. Figure 6-36 displays a

comparison of modeled and measured time-series of water-surface elevation for the Lewes, Delaware Station (8557380) from 3-11 Jan 1996, which included ET070. The time-series of measured water levels shows that wind has a significant influence on water levels in the study area. Astronomical tides at this location are approximately 1.5 m during this time period, whereas with wind, water levels were elevated 0.75 m during the validation period. Overall, ET070 model simulation reproduced measured water levels fairly well.

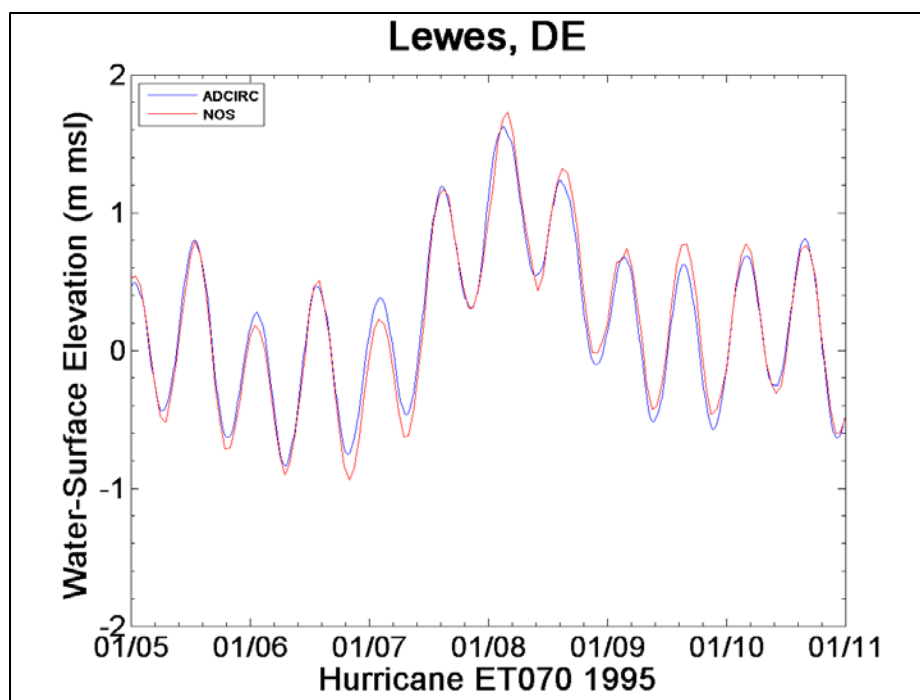


Figure 6-36. ET070 time series comparison at Lewes, Delaware.

#### 6.7.3.7 ET073

ET073 was simulated for the period beginning November 17, 1996 at 00:00 Greenwich Mean Time (GMT) and concluding at December 09, 1996 at 00:00. A 1-sec time-step was used in the simulation, and a 16-day ramping function was applied to the tidal signal and the wind fields at the beginning of the simulations in order to prevent generating spurious modes of oscillation by starting the model under full forcing. Time-varying tidal elevations corresponding to the 22-day simulation time period were specified at nodes along the open ocean boundaries, synthesized using the  $M_2$ ,  $S_2$ ,  $N_2$ ,  $K_1$ ,  $O_1$ ,  $Q_1$ ,  $P_1$ , and  $K_2$  tidal constituents. Constituent information was extracted from a database developed from the TOPEX 7

satellite measurements. Wind fields for the 12/01/96 through 12/09/96 time period were supplied to the model and were developed by Ocean-weather, Inc (OWI). This OWI data included hourly wind components and pressures at 0.25-deg spacing for the basin scale region, bounded by latitude range 22 to 48 North; and longitude range 58 to 82 West.

Time-series of measured NOAA/NOS water-surface elevations were obtained at 40 stations for the validation time period. Figure 6-37 displays a comparison of modeled and measured time-series of **water-surface elevation for the Willets Point, New York Station (8516990) from the xxxx to xxxx 19xx validation simulation that included Hurricane Gloria**. The time-series of measured water levels shows that wind has a significant influence on water levels in the study area. Astronomical tides at this location are approximately 1.75 m during this time period, whereas with wind, water levels increased by more than 1.0 m during the validation period. Overall, ET073 model simulation reproduced measured water levels fairly well.

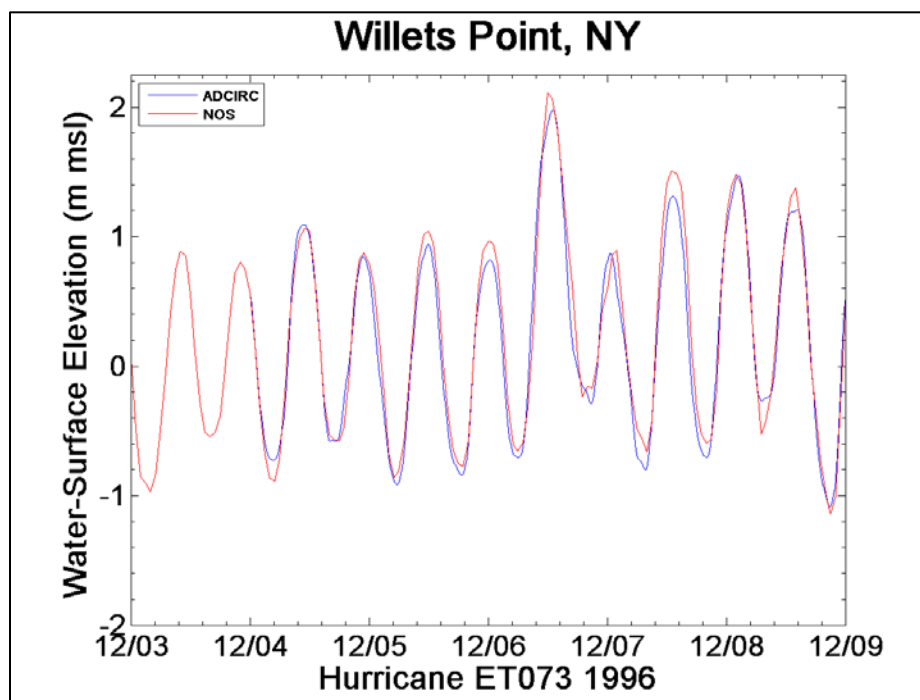


Figure 6-37. ET073 time series comparison at Willets Point, New York.

#### 6.7.4 IMEDS

Comparisons between measured and modeled water levels were achieved using the Interactive Model Evaluation and Diagnostics System (IMEDS).

(For additional details about IMEDS, see references at <http://www.frf.usace.army.mil/morphos/imeds/ref.shtml>.) The premise behind IMEDS is to determine a "performance score" or metric for the modeled event. The overall model "performance score" is computed by normalizing the water level metrics (statistical quantities: root mean square error and bias) to mean quantities and averaging them across metrics, time, and stations with contributions weighted by sample size. The resulting non-dimensional performance score ranges from 0.0 to 1.0, with 1.0 indicating perfect model performance, and relates to the fraction of the mean that is not impacted by error.

In general, the coupled ADCIRC model performed well for the set of tropical and extratropical storm events applied in the validation series. Coupled storm simulations were initiated with a 16-day tidal spin-up and continued with the application of basin and regional-scale winds and pressures for each event. River inflow and wave forcing were also included in the validation simulations. Water level measurements from 133 NOAA NOS stations throughout the study area were queried and when available, were compared to the coupled ADCIRC-simulated water levels using IMEDS. Figure 6-38 and Figure 6-39 show the IMEDS scores for Hurricane Sandy at each available station in the northern and southern portions of the study area, respectively. Lower scores in Chesapeake Bay are attributed to the lack of detailed winds in this region. As indicated in Table 6-3, the model compares well to the measured water levels for all validation simulations as indicated by IMEDS summary performance scores of 0.83 to 0.89.

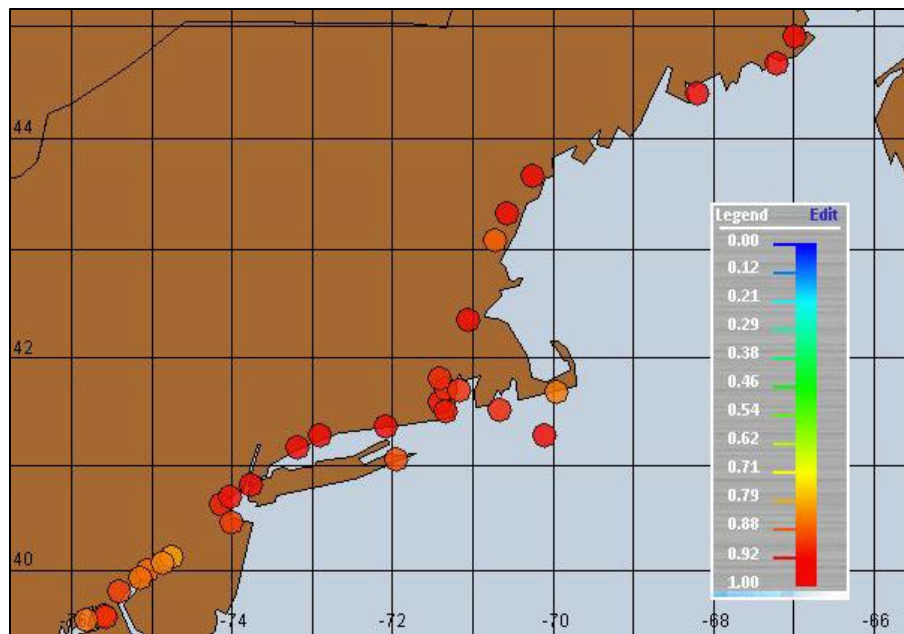


Figure 6-38. Hurricane Sandy IMEDS scores for the northern portion of the study area.

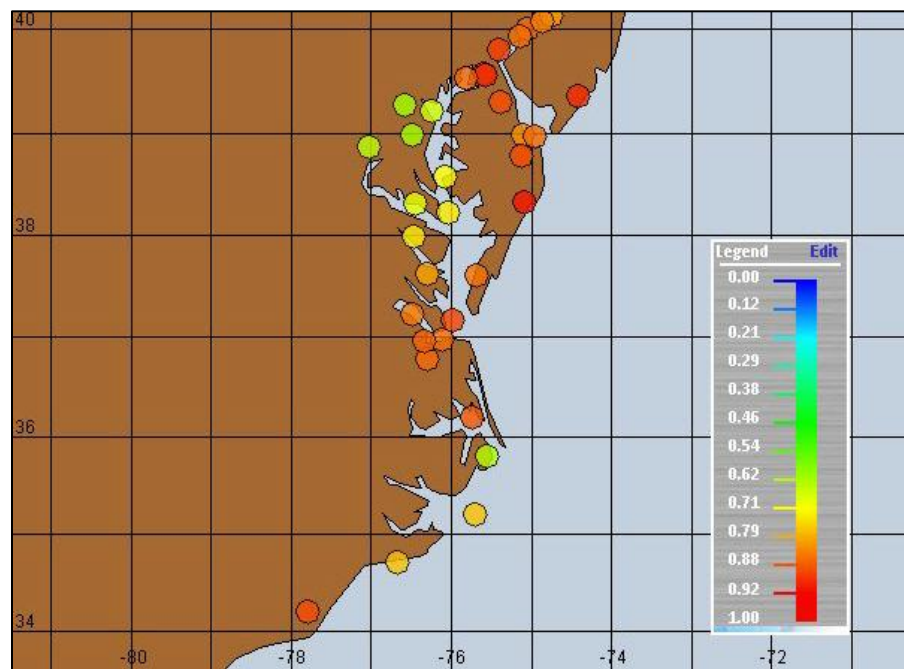


Figure 6-39. Hurricane Sandy IMEDS scores for the southern portion of the study area.

Table 6-3. Coupled ADCIRC validation IMEDS scores.

Storm Name	Year	Performance Score	Overall Bias (m)
Gloria	1985	0.838	0.014
Josephine	1996	0.834	0.014
Isabel	2003	0.89	-0.003
Irene	2011	0.868	0.005
Sandy	2012	0.868	-0.04
Extratropical 070	1996	0.841	0.015
Extratropical 073	1996	0.862	-0.004

### 6.7.5 High Water Marks Comparisons

A comparison of Hurricane Sandy peak water level model results to USGS high water marks shows the ability of the model to inundate low-lying areas during storm events accurately. Comparisons were made at 314 land locations that wetted during this event. Figure 6-40 shows that 90% of the comparison locations differed by less than 0.5 m. Red or “hot” colors indicate an over-prediction of the peak water level by the model and blue or “cool” colors indicate an under-prediction of the peak water level by the model. The average difference for these locations was 0.2 m. Figure 6-41 shows that 10% of the comparison locations differed by more than 0.5 m. The average difference for these locations was 1.0 m.



Figure 6-40. Differences between modeled and measured water levels of less than 0.5 m.



Figure 6-41. Differences between modeled and measured water levels of more than 0.5 m.

## 6.8 Summary

An ADCIRC model for simulating storm surge for the east coast region from Virginia to Maine was developed for the NACCS. The ADCIRC mesh domain encompasses the western North Atlantic, the Gulf of Mexico and the western extent of the Caribbean Sea with 3.1 million computational nodes and 6.2 million elements. The ADCIRC mesh developed and applied to the NACCS was adapted from a combination of two previously validated FEMA model meshes and the NOAA VDATUM mesh. For the northern reaches, the combined mesh was refined, expanded, and extended into areas not included in the existing meshes. The full NACCS finite element mesh included the upland areas to allow for flooding and drying of these areas during storms and to allow for overland wind reduction in the model simulations.

ADCIRC model validation was accomplished by comparisons of model simulated water levels to NOAA/NOS measured water-surface elevations. Model validation was conducted with the analysis of a long term tidal simulation as well as 5 tropical and 2 extratropical storm events. From the harmonic analysis conducted for the long-term simulation it was determined that the model accurately predicts response to tidal forcing. Model accuracy was tested for the 7 validation storm events and showed that the model agrees with measured water-surface elevations (time series and high water marks) at measurement locations throughout the study do-

main. Model accuracy is a function of the quality of the ADCIRC mesh, the accuracy of the bathymetry within the mesh, the representation of bottom friction characterized in the model, and the accuracy of the wind forcing. Small differences in modeled and measured water surface elevations for the validation storms are attributed to these factors.

## **7 Nearshore Wave Modeling**

### **7.1 Introduction**

The purpose of applying nearshore wave models is to describe quantitatively the change in wave parameters (wave height, period, direction, and spectral shape) between the offshore and the shoreline (typically depths of less than 40 m). Offshore wave information obtained from wave buoys or global- or regional-scale wave hindcasts and forecasts is transformed through the nearshore coastal region using these models.

The nearshore wave model Steady State spectral WAVE (STWAVE) was applied for the NACCS. Ten STWAVE grids, encompassing the East Coast from Virginia to Maine, were developed for this modeling effort.

In order to rigorously represent the underlying physical processes of the storm events, ‘tight’ two-way coupling between ADCIRC and STWAVE was facilitated with the Coastal Storm Modeling System (CSTORM-MS), a physics-based modeling capability for simulating tropical and extratropical storm, wind, wave, and water level response. During the two-way coupling process, a single instance of ADCIRC passes water elevations and wind fields to multiple instances of STWAVE. Upon completion, STWAVE passes wave radiation stress gradients to ADCIRC to drive wave-induced water level changes (e.g., wave setup and setdown). Additional detailed information about the coupling procedure is found in Chapter 8.

This chapter presents the theoretical description of STWAVE, model setup including grid develop and offshore forcing, model parameters, and validation for the NACCS application.

### **7.2 STWAVE Version 6.2.24**

STWAVE is a steady-state, finite-difference, phase-averaged spectral wave model based on the wave action balance equation. STWAVE simulates nearshore wave transformation including depth- and current-induced refraction and shoaling, depth- and steepness-induced wave breaking, wind-wave generation and growth, and wave-wave interaction and whitecapping.

### 7.2.1 Model description

The STWAVE model uses the governing equation for steady-state conservation of spectral wave action along a wave ray (Jonsson 1990):

$$(C_g)_i \frac{\partial}{\partial x_i} \frac{C C_g \cos(\alpha) E(\omega, \alpha)}{\omega} = \sum \frac{S}{\omega} \quad (1)$$

where:

- $C_g$  = group celerity
- $C$  = wave celerity
- $i$  = tensor notation for x- and y-coordinates
- $\alpha$  = wave orthogonal direction
- $E$  = wave energy density divided by the density of water  $\rho_w$  and the acceleration of gravity  $g$
- $\omega$  = angular frequency
- $S$  = energy source and sink terms.

Source and sink mechanisms include surf-zone breaking in the form of the Miche criterion (1951), the flux of input energy due to wind (Resio 1988; Hasselmann 1973), energy distribution through wave-wave interactions (Resio and Perrie 1989), whitecapping (Resio 1987; 1988), and energy losses due to bottom friction (Hasselmann et al. 1973; Padilla-Hernandez 2001; Holthuijsen 2007). Radiation stress gradients are calculated based on linear wave theory and provide wave forcing to external circulation models.

The wave orthogonal direction for steady-state conditions is given by the following (Mei 1989; Jonsson 1990):

$$C_g \frac{D\alpha}{DR} = - \frac{Ck}{\sinh(2kd)} \frac{Dd}{Dn} \quad (2)$$

where:

- $R$  = coordinate in the direction of the wave ray
- $k$  = wave number
- $d$  = water depth
- $n$  = coordinate normal to the wave orthogonal.

The angular frequency is related to the wave number  $k$  by the dispersion relation:

$$\omega^2 = gk \tanh(kd) \quad (3)$$

with celerity,  $C$ , and group celerity  $C_g$ , given by:

$$C = \frac{\omega}{k} \quad (4)$$

$$C_g = 0.5C \left[ 1 + \frac{2kd}{\sinh(2kd)} \right] \quad (5)$$

Refraction and shoaling are implemented in STWAVE by applying the conservation of wave action along backward traced wave rays. Rays are traced in a piecewise manner. The wave ray is traced back to the previous grid column or row, and the length of the ray segment  $DR$  is calculated. Derivatives of depth normal to the wave orthogonal are estimated (based on the orthogonal direction) and substituted into Equation 2 to calculate the wave orthogonal direction at the previous column. The energy is calculated as a weighted average of energy between the two adjacent grid points in the column and the direction bins. The energy density is corrected by a factor that is the ratio of the angle band width to the width of the back-traced band to account for the different angle increment in the back-traced ray. The shoaled and refracted wave energy is then calculated using Equation 1. The process is repeated for the next columns.

Readers are referred to STWAVE documentation (Massey et al. 2011; Smith 2007; Smith et al. 2001) for additional model features and technical details.

## 7.3 Model Setup

### 7.3.1 Grid Development

STWAVE is formulated on a Cartesian grid, with the x-axis oriented in the cross-shore direction (I) and the y-axis oriented alongshore (J), parallel with the shoreline. Angles are measured counterclockwise from the grid x-axis.

The bathymetry, topography, and bottom friction Manning's  $n$  values were interpolated from the ADCIRC mesh to create ten STWAVE domains. The STWAVE grids spanned two projections, UTM Zone 18 and 19. Figure 7-1 shows the location of grids with respect to the ADCIRC mesh, with grid geometries presented in Table 7-1. The full names of the grids are based on the covered state, moving from north to south. Abbreviated grid names, also provided in Table 7-1, will be used hereafter. The grids' offshore boundaries were extended into depths of at least 30 m. Wave interactions with the bottom at this offshore extent are relatively small, particularly in comparison to the importance of wave generation. A previous validation effort of STWAVE for Hurricane Ike featured offshore boundaries near the 30 m contour (Bender et al. 2013). In cases of steep-shorelines, such as Maine, the offshore boundaries were extended further than 30 m offshore to obtain an approximate equal number of grid cells between the offshore boundary and the shoreline as the other grids.

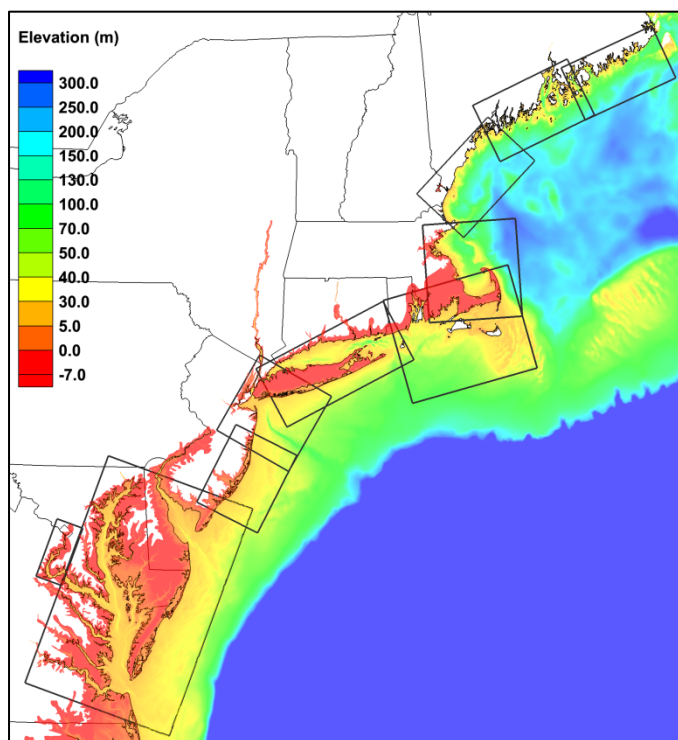


Figure 7-1. STWAVE grid domains.

A grid resolution of 200 m was selected for all of the grids except for the grid encompassing Chesapeake Bay and Washington D.C, which had finer resolutions of 125 m and 100 m, respectively. Previous studies of Hurricanes Katrina, Rita, Gustav, and Ike in the Gulf of Mexico used similar

resolutions and demonstrated good agreements between measurements and STWAVE (Dietrich et al. 2008; Hope et al. 2008; Bunya et al. 2010; Dietrich et al. 2010; Bender et al. 2013). The resolution for coastal areas in these studies was 200 m, with 100-200 m resolution in the nested bays. A 200 m resolution was selected for the majority of the grids as these past studies showed this resolution sufficiently resolved the surf zone to capture the wave breaking processes that drive wave radiation stresses and wave setup. A finer resolution was needed in Chesapeake Bay and around Washington D.C. in order to accurately resolve the bay's smaller characteristics. A 100 m resolution within Chesapeake Bay proved to be computationally intensive; thus, the grid resolution was decreased from 100 m to 125 m. Decreasing the resolution of the Chesapeake Bay grid reduced the grid size by approximately 35% without significantly impacting the maximum wave height solution for a preliminary Sandy simulation (the absolute difference in maximum wave height within Chesapeake Bay rarely exceeded 0.1 m)

Table 7-1. STWAVE grid geometries.

Grid	Projection	Grid Origin (x,y) (m)	Azimuth (deg)	Resolution (m)	Number of Cells	
					I	J
Northern Maine (NME)	UTM 19	682704.7, 4899673.0	110.7	200.0	392	682
Central Maine (CME)	UTM 19	568406.9, 4857172.5	112.0	200.0	427	720
Southern Maine (SME)	UTM 19	482432.8, 4800937.9	133.0	200.0	439	717
Eastern Massachusetts (EMA)	UTM 19	450200.0, 4724100.0	180.0	200.0	638	670
Southern Massachusetts (SMA)	UTM 19	465575.3, 4518084.4	101.9	200.0	733	887
Long Island (LID)	UTM 18	802679.3, 4544326.0	117.9	200.0	453	986
North New Jersey (NNJ)	UTM 18	689660.5, 4494212.9	150.2	200.0	569	593
Central New Jersey (CNJ)	UTM 18	642056.1, 4413284.8	153.1	200.0	468	596
Chesapeake Bay (CPB)	UTM 18	581350.8, 4339880.0	159.8	125.0	1687	2653
Washington D.C. (WDC)	UTM 18	348428.2, 4313375.1	159.9	100.0	377	837

### 7.3.2 Offshore boundary spectra

Spectral wave energy saved from WAM is transformed to STWAVE coordinates and applied as offshore boundary forcing for the STWAVE domains open to the Atlantic Ocean. The location of these boundary points is found in Table 7-2 and Table 7-3 and their location on each grid, along

with detailed bathymetry, is shown in Figure 7-2 to Figure 7-11. The inland WDC grid was forced only by local winds as little wave energy was expected to propagate up the Potomac River system.

Table 7-2. Latitude and longitude of offshore boundary spectra for grids in UTM Zone 19.

NME	CME	SME	EMA	SMA
-68.33, 43.83	-69.25, 43.50	-69.33, 43.33	-69.58, 41.50	-69.42, 40.83
-68.17, 43.83	-69.17, 43.58	-69.25, 43.33	-69.58, 41.67	-69.58, 40.83
-68.08, 43.92	-69.00, 43.58	-69.42, 43.25	-69.58, 41.83	-69.67, 40.75
-67.92, 43.92	-68.92, 43.67	-69.50, 43.17	-69.58, 42.00	-69.83, 40.75
-67.75, 43.92	-68.75, 43.67	-69.58, 43.08	-69.58, 42.17	-70.00, 40.75
-67.67, 44.00	-68.67, 43.75	-69.67, 43.00	-69.58, 42.33	-70.17, 40.67
-67.50, 44.00	-68.50, 43.75	-69.83, 43.00	-69.58, 42.50	-70.33, 40.67
-67.42, 44.08	-68.33, 43.83	-69.92, 42.92	-69.58, 42.67	-70.50, 40.67
-67.25, 44.08	-68.17, 43.83	-70.00, 42.83		-70.58, 40.58
-67.08, 44.17	-69.42, 43.50	-70.08, 42.75		-70.75, 40.58
-66.92, 44.17	-69.58, 43.50	-70.17, 42.67		-70.92, 40.58
-66.75, 44.25	-69.67, 43.42	-70.25, 42.67		-71.00, 40.50
		-70.33, 42.58		-71.17, 40.50
		-70.42, 42.50		-71.33, 40.50
		-70.50, 42.50		-71.50, 40.42

Table 7-3. Latitude and longitude of offshore boundary spectra for grids in UTM Zone 18.

LID	NNJ	CNJ	CPB
-71.42, 41.00	-72.75, 40.58	-73.33, 39.83	36.42, -75.42
-71.50, 41.00	-72.83, 40.50	-73.42, 39.75	36.50, -75.33
-71.58, 40.92	-72.92, 40.42	-73.50, 39.67	36.58, -75.25
-72.58, 40.58	-73.00, 40.33	-73.58, 39.58	36.75, -75.25
-72.42, 40.58	-73.08, 40.25	-73.58, 39.50	36.83, -75.17
-72.33, 40.67	-73.08, 40.17	-73.67, 39.42	36.92, -75.08
-72.17, 40.67	-73.17, 40.08	-73.67, 39.33	37.08, -75.08
-72.08, 40.75	-73.25, 40.00	-73.75, 39.25	37.17, -75.00
-71.92, 40.75	-73.33, 39.92	-73.83, 39.17	37.33, -75.00
-71.83, 40.83	-73.33, 39.83	-73.83, 39.08	37.42, -74.92
-71.75, 40.92	-73.42, 39.75	-73.92, 39.00	37.50, -74.83
-72.75, 40.50	-73.50, 39.67	-74.00, 38.92	37.67, -74.83
-72.83, 40.42			37.75, -74.75
-73.00, 40.42			37.83, -74.67
-73.08, 40.33			38.00, -74.67
-73.25, 40.33			38.17, -74.58
-73.33, 40.25			38.25, -74.50
-73.50, 40.25			38.42, -74.50
			38.50, -74.42
			38.58, -74.33
			38.75, -74.33

LID	NNJ	CNJ	CPB
			38.83, -74.25 38.92, -74.17 39.08, -74.17 39.17, -74.08

The number and values of the discrete frequency bands, as well as the starting and ending bands, were the same as those defined in WAM. The number and value of the frequency bands were defined as:

$$f(n + 1) = 1.1 * f(n) \text{ where } n = 1, 28$$

and the starting and ending bands were 0.0314 Hz ( $T = 31.8$  sec) and 0.4114 Hz ( $T = 2.4$  sec), respectively. The resolved frequency range for the WDC domain was narrower. The frequency distribution was defined as 0.125 Hz ( $T = 8$  sec) to 0.975 Hz ( $T = 1.03$  sec) with a constant frequency increment of 0.025 Hz. The number of angle bands was constant at 72, resulting in an angular resolution of 5 deg. For full-plane mode, the wave directions begin at 0 deg and increase in angular resolution (5 deg increments) to 355 deg. Morphic interpolation was applied along the boundary between input spectra and 1-D transformation performed along the lateral boundaries.

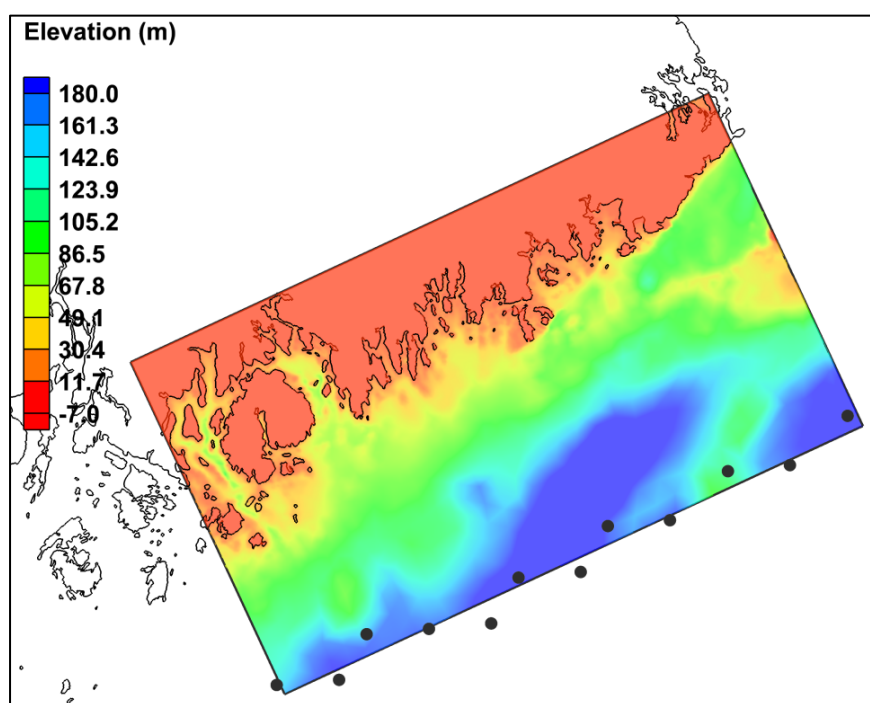


Figure 7-2. WAM offshore spectra locations and bathymetry of NME.

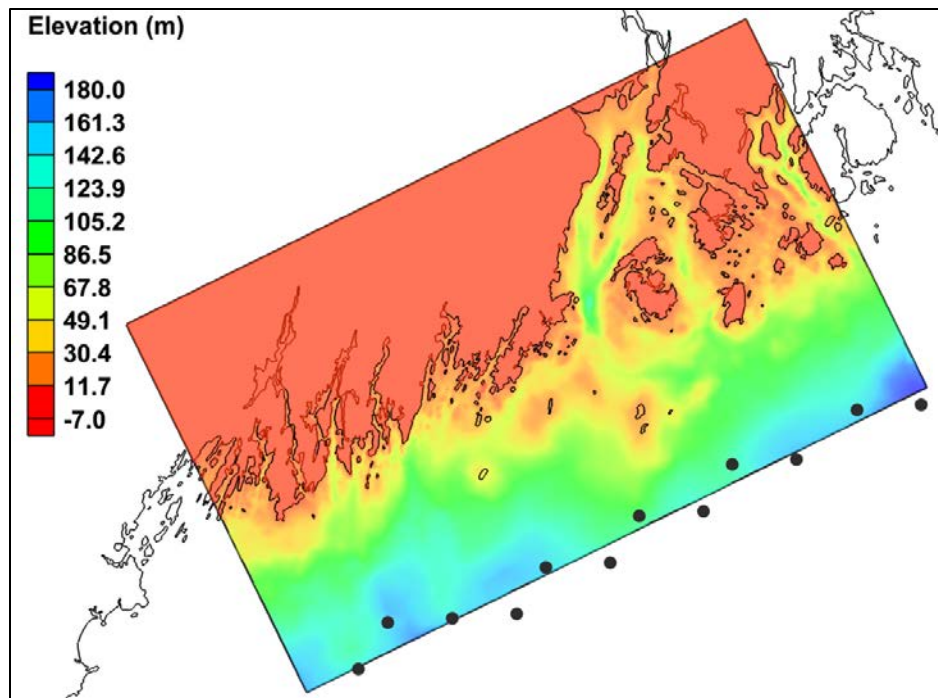


Figure 7-3. WAM offshore spectra locations and bathymetry of CME.

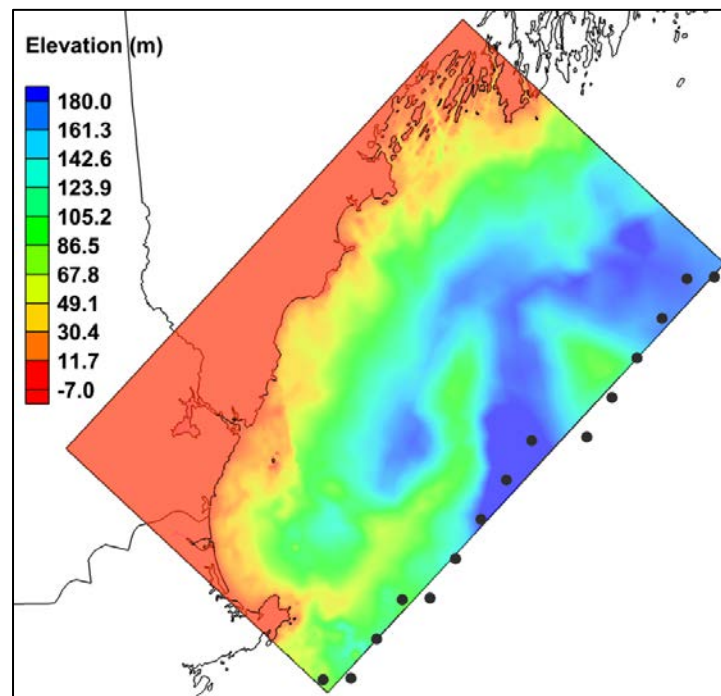


Figure 7-4. WAM offshore spectra locations and bathymetry of SME.

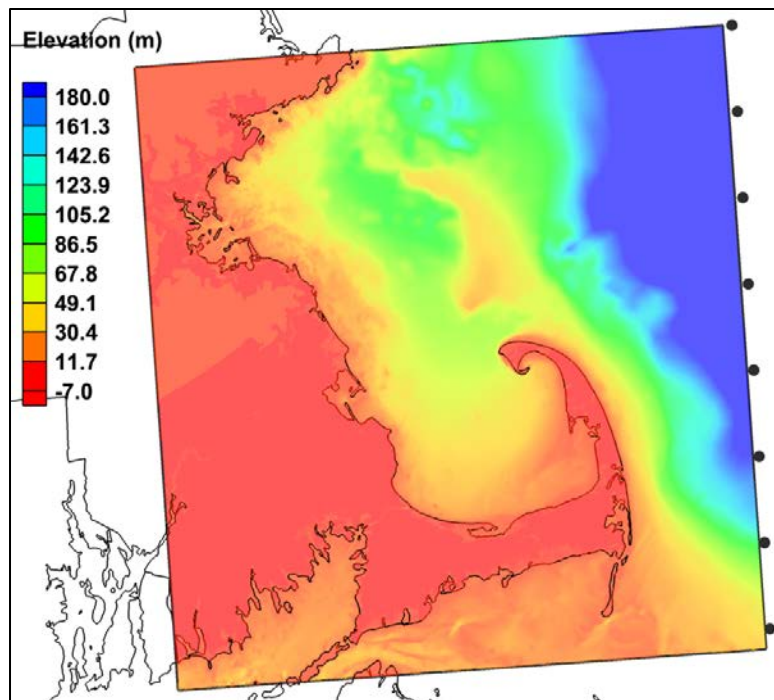


Figure 7-5. WAM offshore spectra locations and bathymetry of EMA.

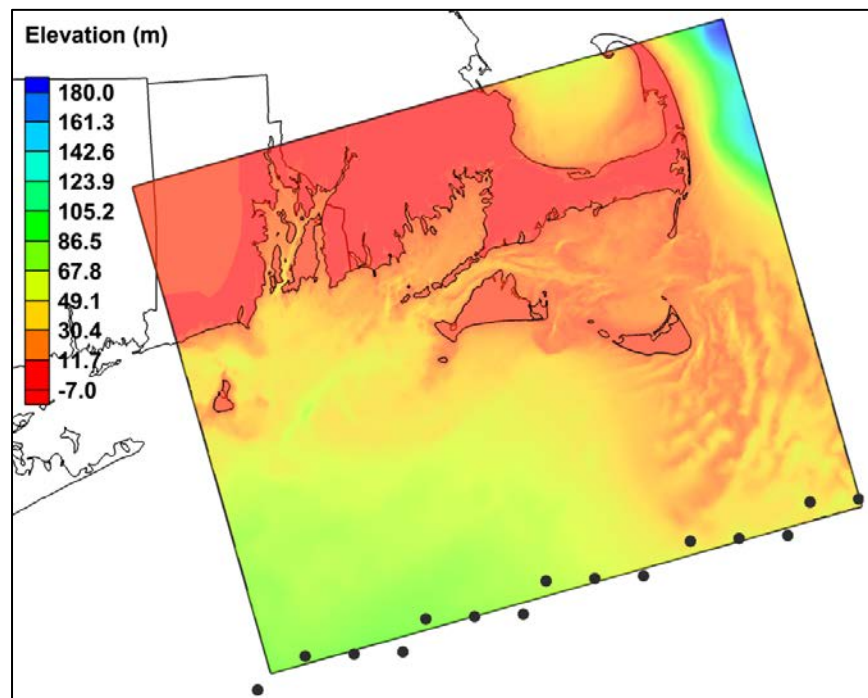


Figure 7-6. WAM offshore spectra locations and bathymetry of SMA.

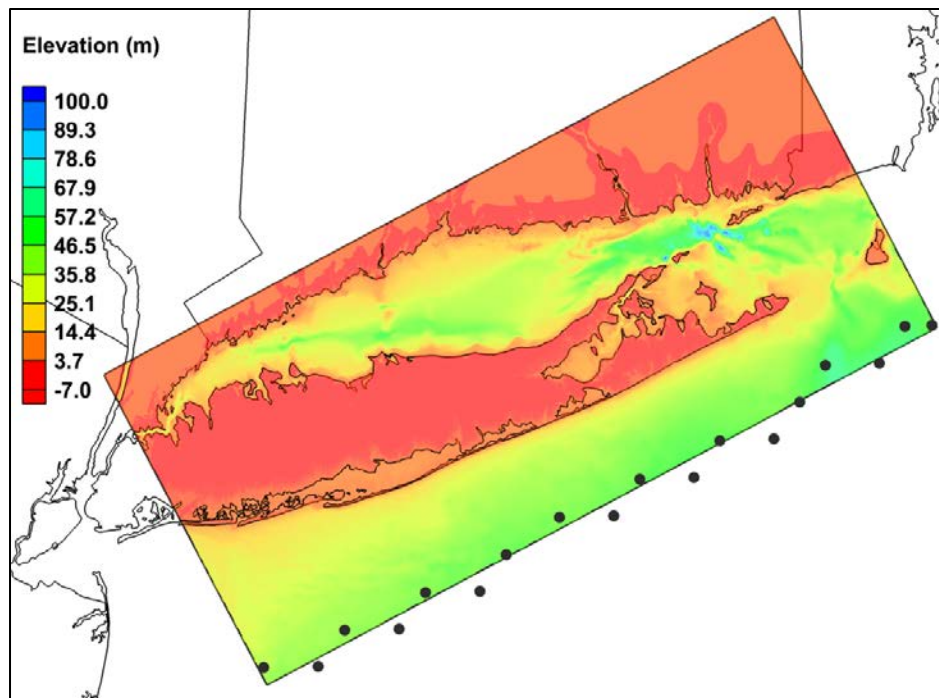


Figure 7-7. WAM offshore spectra locations and bathymetry of LID.

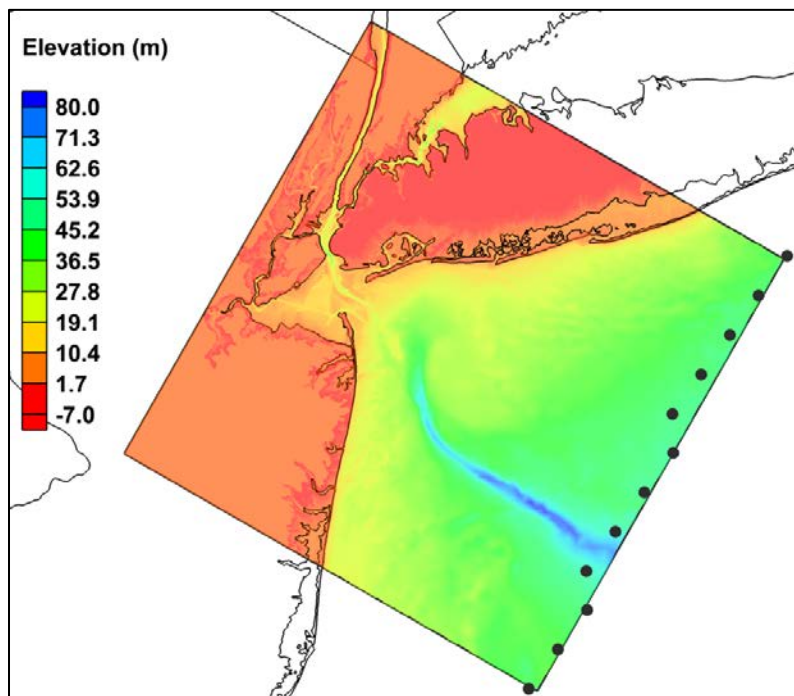


Figure 7-8 WAM offshore spectra locations and bathymetry of NNJ.

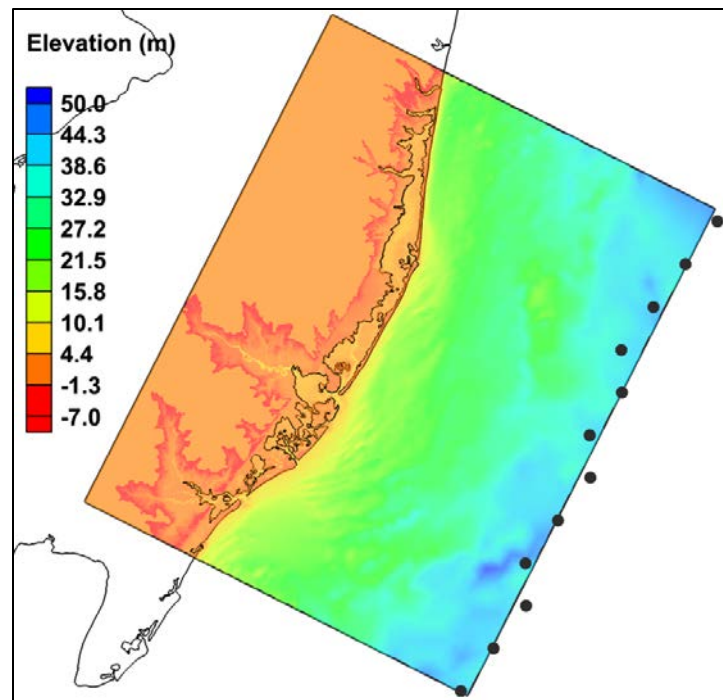


Figure 7-9. WAM offshore spectra locations and bathymetry of CNJ.

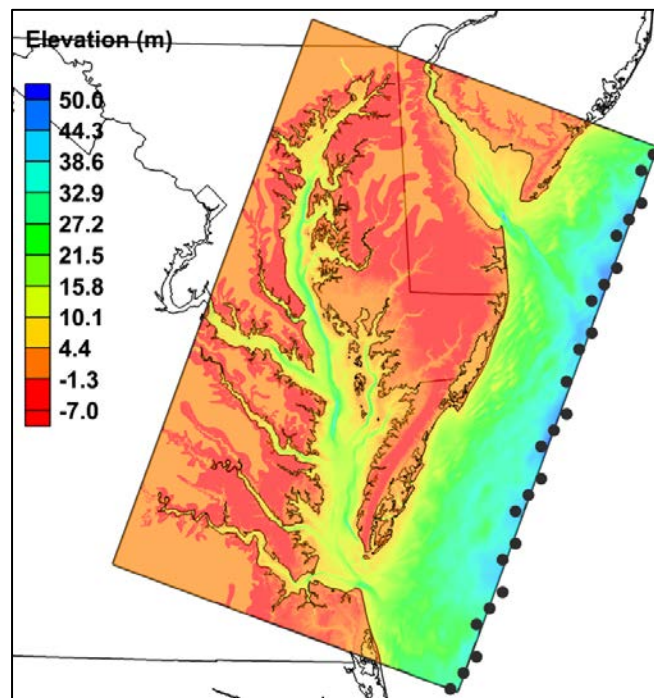


Figure 7-10. WAM offshore spectra locations and bathymetry of CPB.

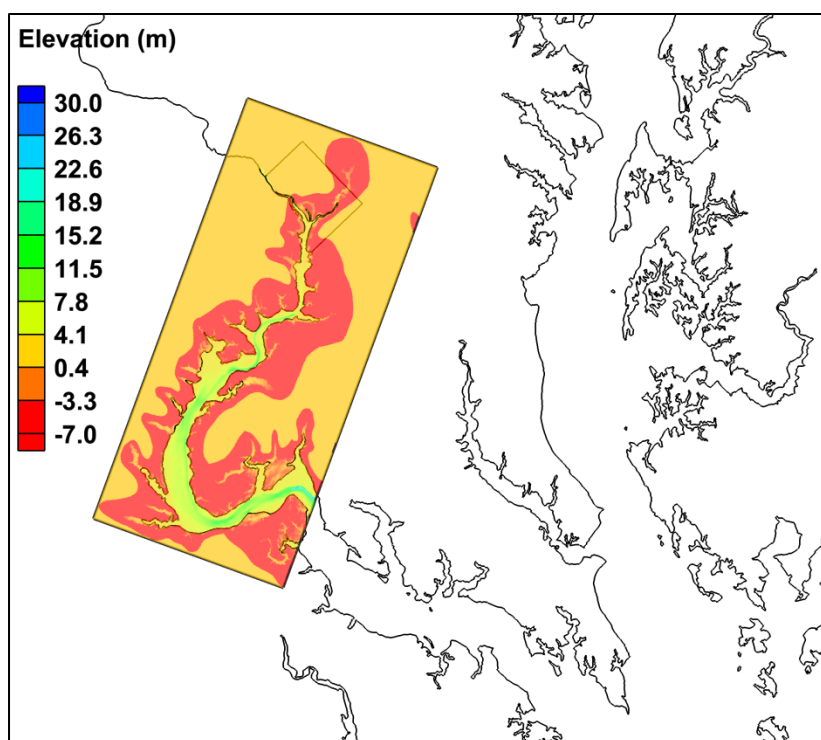


Figure 7-11. Bathymetry of WDC. No spectral points are shown since waves were locally generated within the domain.

### 7.3.3 High-frequency save points

Storm conditions were exported at selected (x, y) locations during each time step. The output information consists of the following: time step identifier, x-location (in grid projection), y-location (in grid projection), significant wave height (m), mean wave period (sec), mean wave direction (deg), peak wave period (sec), wind magnitude (m/s), wind direction (deg), and water elevation (m). This information is stored in the \*.station.out files. The location of these save points can be referenced in Section 6.6.

## 7.4 Model parameters

### 7.4.1 Half-plane versus full-plane

STWAVE has two modes available, half-plane and full-plane. Half-plane mode allows wave energy to propagate only from the offshore towards the nearshore ( $\pm 87.5$  degrees from the x-axis of the grid), and grids are typically aligned with the dominant wave direction. All waves traveling in the negative x-direction, such as those generated by offshore-blowing winds, are neglected in half-plane simulations. Full-plane mode allows wave

transformation and generation on the full 360-deg plane. During grid development, simulations were executed in both half-plane and full-plane mode to quantify any differences in the wave field. Local differences in the maximum wave height solution existed in all the grids, particularly those near the landfall location and with complex shorelines and features (bays, islands, barrier islands, etc.). Because determining and aligning the grids with the dominate wave direction is not feasible given the extensive number of production storms, all simulations were executed in full-plane mode, allowing wave generation in all directions and a more realistic representation of the wave climate.

#### **7.4.2 Model execution**

The full-plane version of STWAVE uses an iterative solution process that requires user-defined convergence criteria to signal a suitable solution. Boundary spectra information is propagated from the boundary throughout the domain during the initial iterations. Once this stage converges, winds and surges are added to the forcing and this final stage iteratively executes until it also reaches a convergent state. The convergence criteria for both stages include the maximum number of iterations to perform per time step, the relative difference in significant wave height between iterations, and the minimum percent of cells that must satisfy the convergence criteria (i.e., have values less than the relative difference). Convergence parameters were selected based on a previous study by Massey et al. (2011), in which the sensitivity of the solution to the final convergence criteria was examined.

Full-plane mode required considerable memory requirements and run times, particularly the CPB domain due to its large size. STWAVE was set-up with parallel in-space execution whereby each computational grid was divided into different partitions (in both the x- and y-direction), with each partition executing on a different computer processor. Because energy can only cross one grid partition at a time during a single iteration, the maximum number of initial and final iterations was set to a value 5 and 20 times higher than the largest grid partition, respectively. Testing to optimize both the total number of processors and the number of processors assigned to each grid was performed to maximize computational efficiency and reduce execution time. The convergence criteria and partitions for each grid are shown in Table 7-4.

## 7.5 STWAVE validation

The validation storms selected consist of five tropical events: Gloria (1985), Josephine (1996), Isabel (2003), Irene (2011), and Sandy (2012) and two extratropical events: ET070 (January 1996) and ET073 (December 1996). Forcing conditions from WAM and ADCIRC were applied every 30-minutes. Upon completion of the run, the simulations were checked for consistency and, when applicable, the performance of STWAVE was evaluated by comparing existing point source measurements and model results.

Table 7-4. Full-plane runtime parameters.

Grid	Maximum Iterations		Relative Difference		Minimum Cell Percentage		Number of Cells per partition	Partitions		Processors
	Initial	Final	Initial	Final	Initial	Final		I	J	
NME	14	29	0.1	0.05	100	99.8	80	5	9	45
CME	15	30	0.1	0.05	100	99.8	70	6	10	60
SME	15	30	0.1	0.05	100	99.8	70	6	10	60
EMA	14	29	0.1	0.05	100	99.8	76	8	9	72
SMA	18	33	0.1	0.05	100	99.8	70	10	13	130
LID	21	36	0.1	0.05	100	99.8	60	8	16	128
NNJ	11	26	0.1	0.05	100	99.8	95	6	6	36
CNJ	11	26	0.1	0.05	100	99.8	95	4	6	24
CPB	58	73	0.1	0.05	100	99.8	50	34	53	1802
WDC	13	28	0.1	0.05	100	99.8	100	4	8	32

### 7.5.1 QA/QC

The maximum significant wave height envelope was plotted to identify erroneous estimates or discontinuities in the wave height solution for a given simulation. Figure 7-12 color contours the maximum wave height field for the LID grid for Sandy. Although some offshore wave energy penetrates into Long Island Sound, waves within the bay are largely locally generated.

The convergence of the final wave solution was also checked for each domain. To satisfy the final convergence criteria, at least 99.8 percent of the cells had to have a relative difference in wave height of 0.05 m or less. The number of time steps that did not meet the final convergence criteria is provided in Table 7-5.

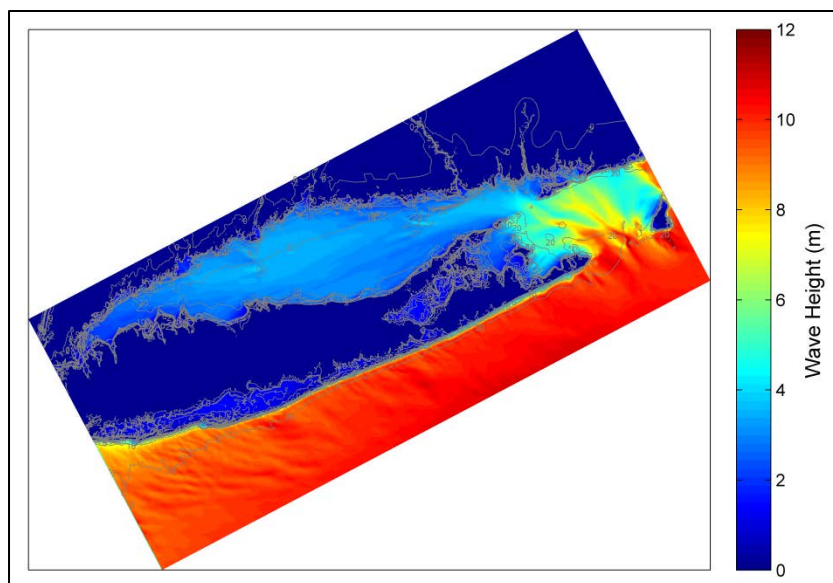


Figure 7-12. Maximum significant wave height color contour of LID grid for Sandy.

The tropical events had fewer unconverged time steps across the ten simulation domains than the extratropical events. The WDC grid accounted for nearly all of the unconverged time steps for the tropical simulations. The unconverged time steps closely approached the 99.8% criterion, with 73 of the 150 total unconverged steps exceeding 99.6%. The lowest percentage was 99.0%. The NME and CME grids, with the addition of the LID grid for ET070, accounted for a large majority of the unconverged time steps for the extratropical simulations. Like the tropical storms, nearly all the unconverged time steps achieved percentages close to 99.8%. Out of 228 total unconverged time steps for ET070 and ET073, only seven did not exceed 99.6%. The lowest percentage for the extratropicals was 97.3%.

Table 7-5. Unconverged time steps for validation storms.

Storm	Number of Days Modeled	Number of Unconverged Time Steps									
		NME	CME	SME	EMA	SMA	LID	NNJ	CNJ	CPB	WDC
ET070	3	27	45	10	0	0	43	0	16	0	12
ET073	2	24	42	0	0	0	0	0	0	6	3
Gloria	2.25	0	0	0	0	0	0	0	0	0	2
Josephine	2	0	0	0	0	0	0	0	0	0	14
Isabel	2	0	0	0	0	0	0	0	0	0	5
Irene	3	0	0	0	3	0	0	0	0	25	30
Sandy	4	0	0	0	2	0	0	0	0	0	69



An example of a model-measurement comparison is shown in Figure 7-14 for 44013 during Sandy. For this example, STWAVE shows excellent agreement with measurements of significant wave height ( $H_s$ ), mean wave period ( $T_m$ ), and mean wave direction ( $\theta_{\text{wave}}$ ). As observations of  $T_p$  are shown to be highly variable,  $T_m$  is often considered a more stable comparison parameter. STWAVE captures the growth and decay sequence of the storm, with the peak wave height well represented in the model results.

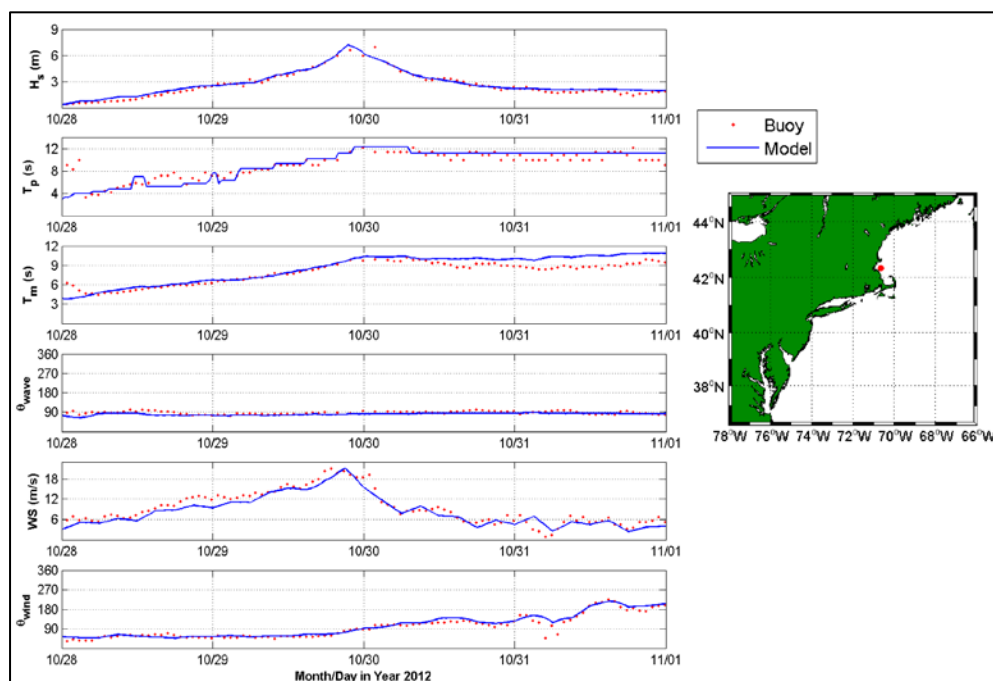


Figure 7-14. Time plot of model results versus measurements at 44013 for Sandy.

The skill of STWAVE in predicting the wave height at each operational buoy is evaluated using Taylor diagrams. A two-dimensional Taylor diagram can represent three different statistics simultaneously (the centered RMSE, the correlation, and the standard deviation). In the following figures, the solid black contours represent the normalized standard deviation, the dash dot blue line represents the correlation coefficient, and the dash green lines represent the RMS error. Normalized statistics were used to collapse the buoy measurements to a single point on the plot. The measured data are indicated by the black dot, which lies at a correlation coefficient and normalized standard deviation of 1 and a RMS error of 0. The closer the data lie to this reference point, the better the model agrees with the measurements. Note that although some model-measurement comparisons have about the same correlation, the model results closer to the reference point simulate the amplitude of the variations (i.e., the

standard deviation) much better and result in a smaller RMS error. Outlying model-measurement comparisons are easily identified using Taylor diagrams. Taylor diagrams for the extratropical events are shown in Figure 7-15 and Figure 7-16.

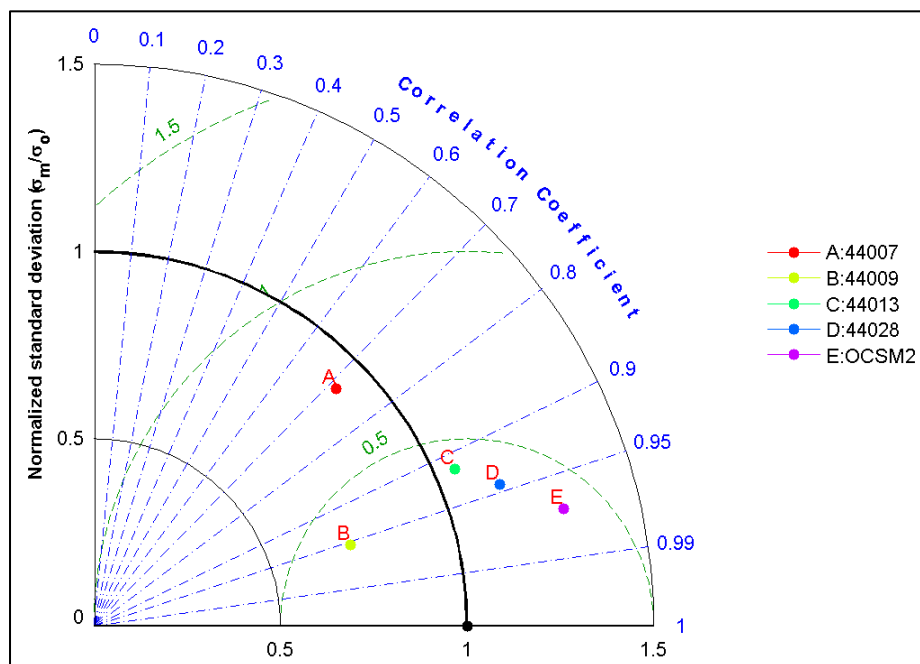


Figure 7-15. Taylor diagram for ET070.

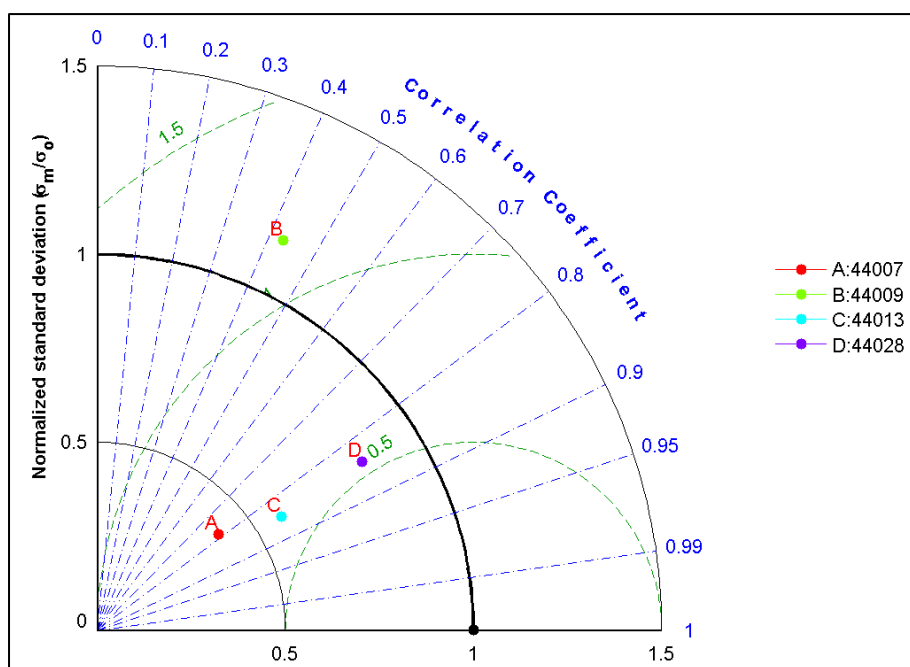


Figure 7-16. Taylor diagram for ET073.

STWAVE performs better for ET070 than ET073. Figure 7-15 shows a correlation greater than 0.9 and a normalized RMS error less than 0.5 at three of four sites for ET070. Figure 7-17 shows scatter on both sides of the line of perfect fit although a slight negative bias is evident for ET070. STWAVE consistently underestimated wave heights, particularly the largest, for ET073.

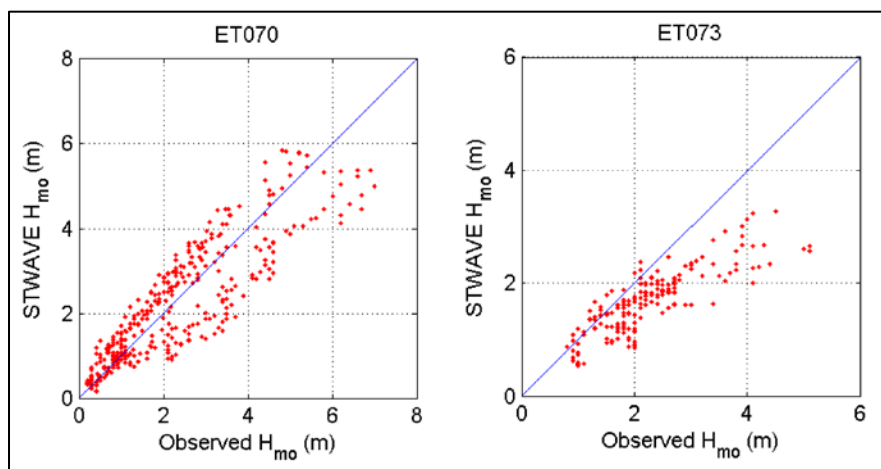


Figure 7-17. Scatter plots of validation extratropical storms.

Looking at Figure 7-18 to Figure 7-22 for the tropical events, STWAVE improved with more recent storms as more buoys lie near the reference point. This may be a result of the development of improved wind and off-shore forcings as well as enhancements in in-situ measurement techniques. For example, tracking 44007 shows STWAVE's performance at this location improving with time. For storms prior to Irene, STWAVE's best performance is seen at buoys within the detailed wind boundaries. However, to say this is the definite reason for this improved performance is difficult as measurements are extremely limited for these early storms.

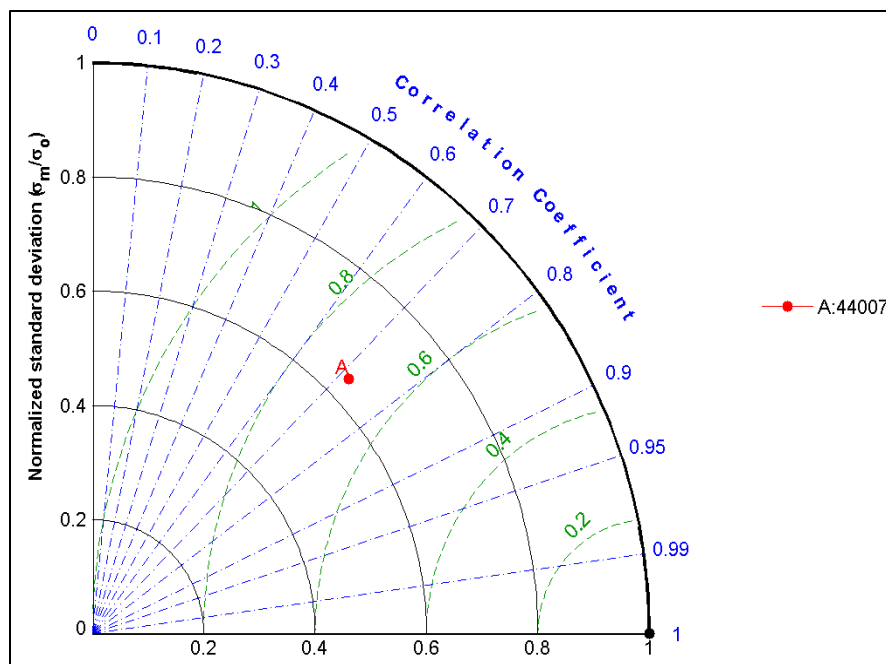


Figure 7-18. Taylor diagram for Gloria.

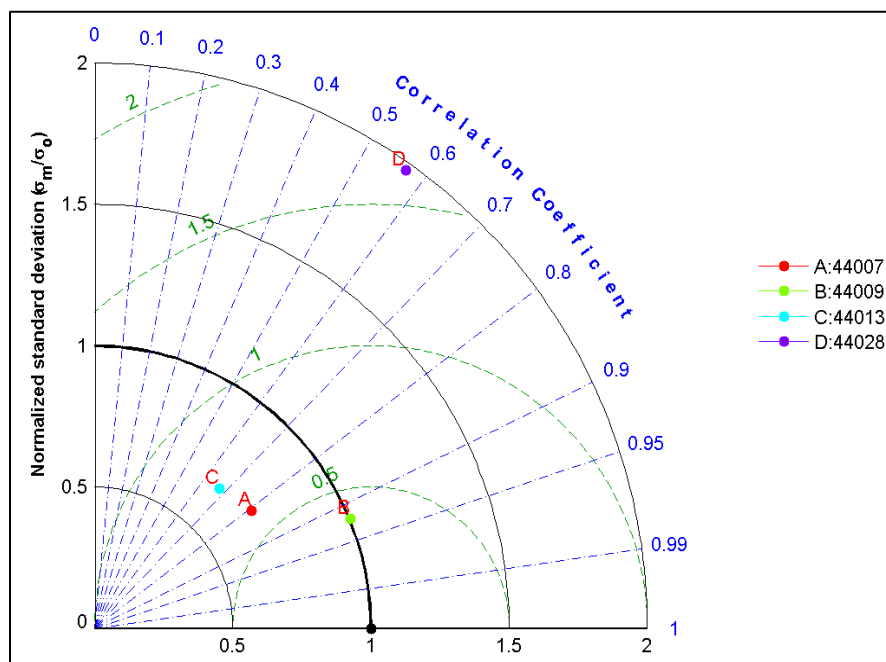


Figure 7-19. Taylor diagram for Josephine.

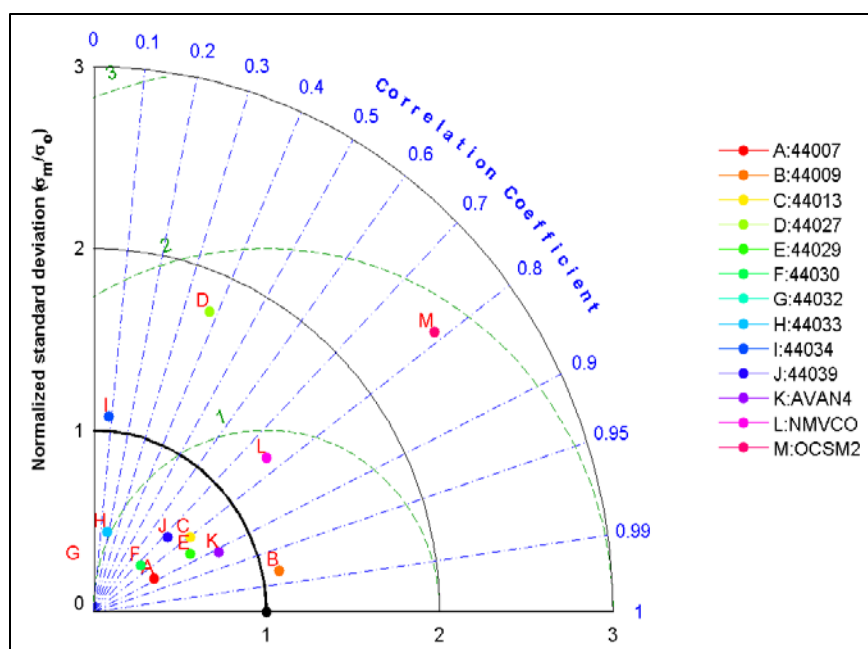


Figure 7-20. Taylor diagram for Isabel.

The performance of STWAVE for Irene and Sandy are similar (Figure 7-21 and Figure 7-22), with the majority of the sites within a normalized RMS error of 0.5 and correlation greater than 0.8. STWAVE generally performs better outside the detailed wind boundaries than it did for the earlier storms, particularly for the northern buoys. Although model results compared poorly at two northern sites, MVCO and 44033, for Irene, performance at MVCO improved significantly during Sandy. Buoy 44033 cannot be discussed further as it was inoperational during Sandy. Southern measurement sites are mainly located within or near Chesapeake Bay. STWAVE performed average within the bay for both storms, as indicated by the cluster of bluish points. Having detailed winds for Irene did not significantly improve model results in Chesapeake Bay compared to the coarse winds for Sandy.

Two Army Corps coastal stations, BTHD1 and OCSM2, and one CBIBS station, 44064, demonstrated persistent poor performance. Further inspection showed STWAVE significantly overestimated the storm growth sequence while accurately simulating the decay at these sites. Comparing modeled spectra to measured spectra at OCSM2 and BTHD1 during Sandy revealed few details, as the STWAVE spectra looked relatively similar in shape but amplified at the peak. Truncating the modeled spectra at 0.25 Hz to match the measured spectra reduced the wave height by a few centimeters, which was not enough to significantly improve model-

measurement wave height comparisons. Spectra for 44064 were unavailable. Diagnosing the reasons for disappointing model performance is difficult as it could be due to issues in the model formulations, the forcing conditions, or the buoy measurements themselves.

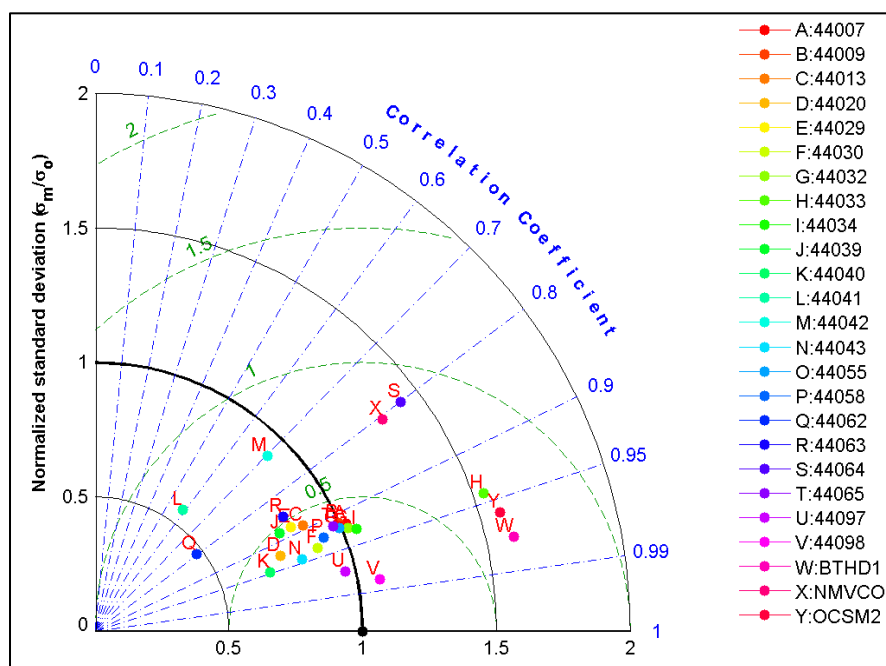


Figure 7-21. Taylor diagram for Irene.

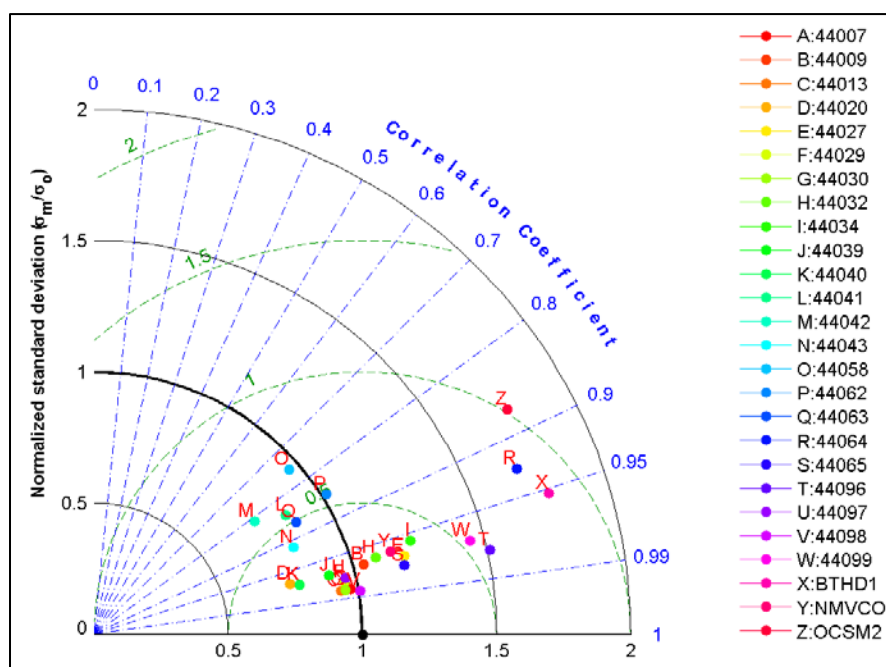


Figure 7-22. Taylor diagram for Sandy.

Looking at the scatter plots presented in Figure 5-23, one can see a noticeable decrease in scatter with more recent storms. Both Gloria and Josephine have far fewer observations than the other storms (< 200). For Isabel, STWAVE generally underestimated wave heights less than 2 m but overestimated the 2-4 m wave height range. The extreme wave heights were captured well by STWAVE. There is a slight positive bias in the model results for Irene and Sandy compared to the measurements. STWAVE does a good job estimating the peak waves for Irene. For Sandy, there are some noticeable outliers lying above the line of perfect, and further inspection revealed these points to be an overestimation of the storm peak at one buoy (44065). Again, the modeled spectral generally compared well to the measured spectra but with simply more energy at the peak frequency.

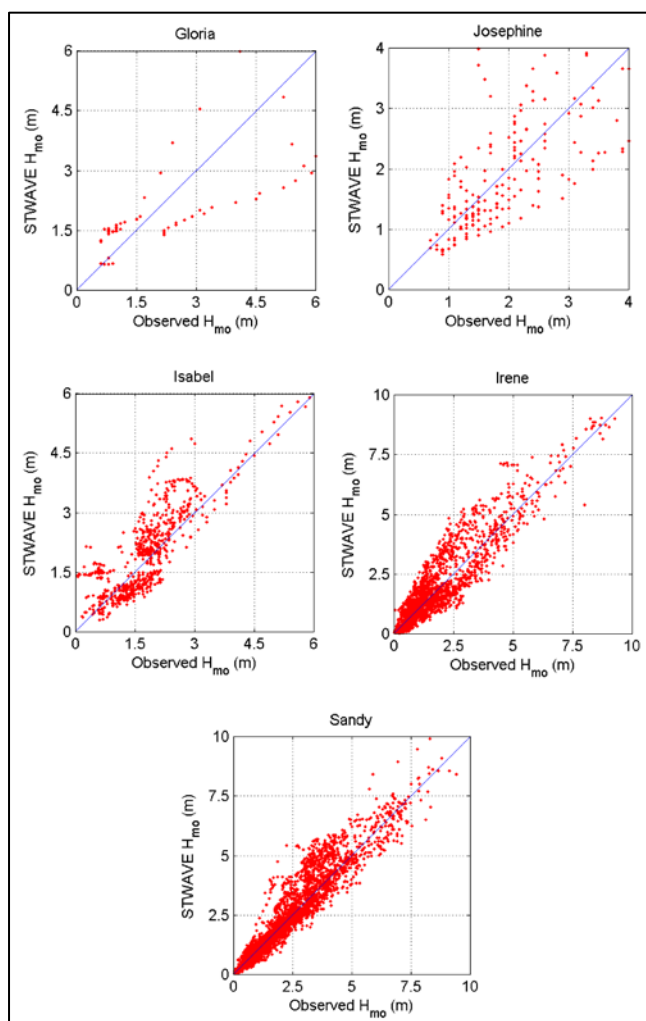


Figure 7-23. Scatter plots of validation tropical storms.

To evaluate STWAVE's performance for each individual storm simulation, statistical tests were run on the time paired measurement and model results. The tests were performed on the significant wave height and mean wave period. The statistical results for significant wave height are presented in Table 7-6. Based on Willmott's index of agreement, the lowest performing storms were Gloria and ET073. Both of these storms had indices of agreement less than 0.6 and significantly higher biases compared to the other storms. The biases were -0.58 m and -0.27 m for Gloria and ET073, respectively, indicating an underestimation of the mean significant wave height. STWAVE's performance in terms of wave height increased with more recent storm events, approaching 0.7 for Josephine and Isabel and exceeding 0.8 for Irene and Sandy. It is important to note that population size increased with more recent storms, allowing for more model-measurement comparisons. These more recent storms demonstrated very low biases (-0.09 m to 0.18 m), suggesting STWAVE accurately captured the mean wave trend. The RMS error results were somewhat disappointing and exceeded 0.5 m for all the storms. Exceeding 1.0 m, the RMS error for Gloria is poor; however, note that only one buoy was operational. The symmetric slope (i.e. linear regression defined with a zero intercept) indicates average negative errors of 6, 27, 20, and 4 percent for ET070, ET073, Gloria, and Josephine, and positive errors of 11, 7, and 6 percent for Isabel, Josephine, and Sandy in modeled significant wave height.

Table 7-6. Summary statistics for validation storm significant wave height.

Storm	Gauges	Observations	Mean (m)		Bias (m)	RMS error (m)	Linear Reg		Index of Agreement
			Obs	STW			Corr	Sym slope	
ET070	5	355	2.23	2.16	-0.08	0.74	0.88	0.94	0.77
ET073	4	183	2.25	1.67	-0.58	0.53	0.83	0.73	0.55
Gloria	1	55	2.2	1.92	-0.27	1.17	0.72	0.8	0.59
Josephine	4	188	2.07	1.99	-0.09	0.74	0.71	0.96	0.65
Isabel	13	697	1.76	1.95	0.18	0.58	0.85	1.11	0.69
Irene	26	2313	1.56	1.66	0.10	0.62	0.92	1.08	0.80
Sandy	26	3516	2.19	2.29	0.10	0.55	0.95	1.06	0.86

The summary for the mean wave period is presented in Table 7-7. Model performance for wave period was worse than for wave heights, as indicated by the lower indices of agreement. Again, model performance generally improved with more recent storms. The bias trend matched those of the wave heights, where pre-Isabel storms saw negative biases and post-Isabel

storms saw positive biases. The RMS error was somewhat high and varied from slightly over 0.5 sec (ET073) to slightly over 2.5 sec (Isabel). The symmetric slope indicated negative errors of 6, 27, 20 and 10 percent for ET070, ET073, Gloria, and Josephine, and positive errors of 19, 18, and 23 percent for Isabel, Josephine, and Sandy in modeled mean wave period relative to the measured mean wave period.

Table 7-7. Summary statistics for validation mean wave period.

Storm	Gauges	Observations	Mean (sec)		Bias (sec)	RMS error (sec)	Linear Reg		Index of Agreement
			Obs	STW			Corr	Sym slope	
ET070	5	290	7.31	6.89	-0.42	1.24	0.85	0.94	0.75
ET073	4	185	8.22	7.20	-0.58	0.53	0.83	0.73	0.49
Gloria	1	55	9.19	7.26	-1.93	1.66	0.22	0.80	0.33
Josephine	4	188	8.34	7.52	-0.83	1.10	0.65	0.90	0.51
Isabel	13	378	8.59	9.86	1.28	2.52	0.79	1.19	0.60
Irene	26	1632	5.59	6.54	0.95	1.96	0.83	1.18	0.72
Sandy	26	2786	6.11	7.50	1.38	1.45	0.9	1.23	0.74

In order to evaluate overall model performance, this battery of statistics was then applied to time paired measurements and model results concatenated across all validation events. Time paired color scatter plots of significant wave height and mean wave period are shown in Figure 7-24 and Figure 7-25, respectively. STWAVE estimates show good agreement to wave height measurements throughout the measurement range as the scatter rarely exceeds the 95-percent confidence limits. The scatter above and below the line of perfect fit is fairly well balanced, resulting in an overall error slightly biased positively at 5.7 percent. Wave heights less than 2.0 m comprise a large percentage of the wave climate. The mean wave period estimates compared to the buoy measurements show far more scatter than the wave heights; however, the bulk of these time paired data sets remain, in general, within the 95-percent confidence limits. The overall error is biased positively at about 17 percent.

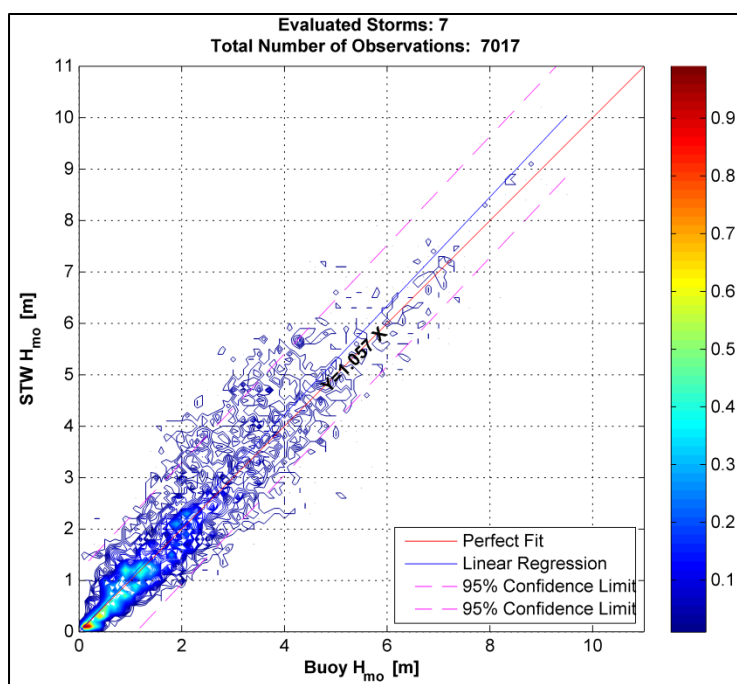


Figure 7-24. Color contour of time paired significant wave heights for all validation storms.

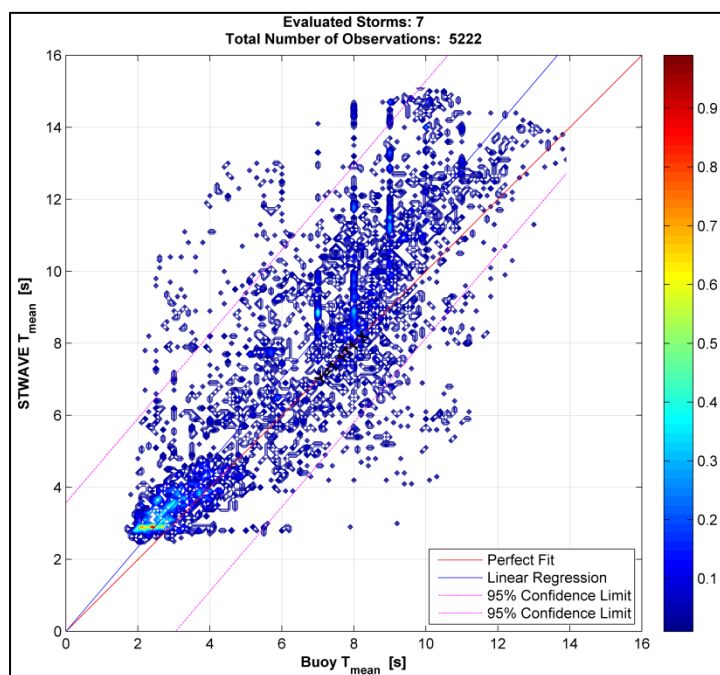


Figure 7-25. Color contour of time paired mean wave period for all validation storms.

STWAVE's overall statistical performance is presented in Table 7-8. While STWAVE performed poorly for the earlier validation events, it did a good job modeling the more recent storms, particularly Irene and Sandy. This is likely due to a combination of factors, such as development of more accu-

rate wind and offshore forcing, more advance buoy technology, and larger measurement population size. A bias of 0.08 m for significant wave height and 1.04 sec for mean wave period are reasonable. The RMS errors of both parameters are somewhat disappointing considering the magnitude of the mean. However, given the extent and complexity of the modeled region and that detailed wind forcing was not available for all the domains, STWAVE performed reasonable and even excellent at many buoys, despite some persistent issues at others.

Table 7-8. Statistical summary of STWAVE's overall performance.

Parameter	Observations	Mean		Bias	RMSE	Linear Reg.		Index of Agreement
		Obs	STW			Corr	Sym slope	
$H_s$ [m]	7017	1.94	2.02	0.08	0.60	0.93	1.06	0.82
$T_m$ [sec]	5222	6.31	7.36	1.04	1.82	0.84	1.17	0.72

## 7.6 Summary

Nearshore wave transformation for the NACCS was accomplished using the spectral wave model STWAVE. Extensive grid creation and development was undertaken along the East Coast, resulting in ten STWAVE grids encompassing coastal Virginia to Maine. All of the grids except those in Chesapeake Bay had 200 m resolution; the Chesapeake Bay and Washington D.C. grids had resolutions of 125 m and 100 m, respectively. This assured that the smaller features of the bay were better represented within the model domain. The wave climate provided by WAM was interpolated onto the STWAVE domains to serve as offshore forcing. Two-way coupling with ADCIRC was facilitated by CSTORM-MS, where ADCIRC passes wind and water levels to STWAVE and STWAVE passes wave radiation stress gradients to ADCIRC to drive wave-induced water level changes. Prior to the production phase, STWAVE results were evaluated against measurements for 5 tropical (Gloria, Josephine, Isabel, Irene, and Sandy) and 2 extratropical storms. The evaluation consisted of time, scatter, Taylor diagrams, and a suite of statistics. STWAVE improved with more recent storms. This is likely due to a combination of factors, such as, but not limited to, development of more accurate wind and offshore forcing, more advance buoy technology, and larger measurement population size. STWAVE was also more accurate in estimating wave height than mean wave period. Although some sites did demonstrate persistent poor performance, STWAVE provided overall good wave estimates compared to measurement sites given the large extent and complexity of the model region.

## 8 CSTORM-MS Production

This chapter summarizes the application of the USACE ERDC Coastal Storm Modeling System (CSTORM-MS) as applied in the NACCS numerical modeling study, including the CSTORM Production System (CSTORM-PS), the CSTORM Production Visualization (CSTORM-PVz), and first level QA/QC reporting. Additional topics include a discussion of the frequency of evaluation of steady state nearshore wave conditions in relation to the forward speed of the storm and a discussion of the three water level conditions used for the CSTORM-MS production simulations. These water level conditions are:

- the base conditions which do not include tides
- the with-tides condition
- the with-tides and sea level change condition.

### 8.1 Coupling Overview

The CSTORM-MS coupling framework is written in modern FORTRAN 90 and uses the Message Passing Interface (MPI) in order to operate in a parallel computing environment. The system has a main controller or driver that operates on a single processor and acts as the “conductor”, instructing the individual models when to run, pause and exchange information through the couplers. The driver also controls the coupler processors which are used to receive, interpolate and send information between the individual models. There is one coupler processor dedicated for each STWAVE domain. Figure 8-1 is a schematic showing the interconnection of processes within the CSTORM-MS framework. In Figure 8-2, the ADCIRC and STWAVE models are shown separated to illustrate the flow of information even though both models use the same computer processors to perform computations. The entire system is contained in a single executable file.

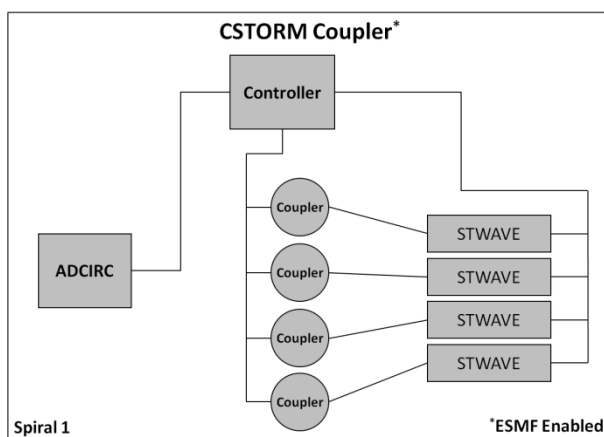


Figure 8-1. A schematic showing the major components of the CSTORM-MS coupling paradigm and the flow of information.

ADCIRC and STWAVE models operate sequentially with ADCIRC starting the process and running for a designated period of time, pauses and waits to receive updated information from STWAVE (Figure 8-2).

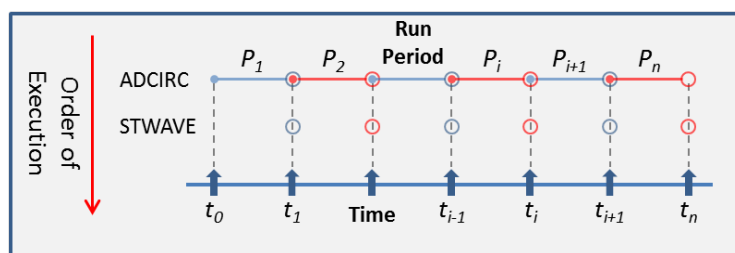


Figure 8-2. A workflow schematic showing the order of operation between ADCIRC and STWAVE within the CSTORM-MS coupling framework. Red and blue alternating patterns are used for visual effects only to show separation of individual run periods.

When ADCIRC pauses, the controller directs ADCIRC to send the latest sea surface elevation and wind to the coupler processors, which in turn perform linear interpolation of those fields onto the STWAVE computational domains. Once mapped, those fields are sent to the individual STWAVE domains for use in computing the updated nearshore wave fields. The controller processor next instructs STWAVE to update the wave field, after which the couplers reverse the flow of information and collect from STWAVE, the gradients of surface wave radiation stresses. The couplers then perform a linear interpolation of those surface wave stress gradients onto the ADCIRC domain.

When multiple STWAVE domains are involved, the driver processor collects the interpolated gradients of wave stresses from all STWAVE domains and combines them into a single wave stress gradient field prior to sending it to ADCIRC. By default, when two or more STWAVE domains overlap, the CSTORM-MS coupling system selects the surface wave stress gradient with the largest magnitude from among the individual STWAVE domains. With the default option, no smoothing of possible disjoint gradients is performed and no adverse results have been observed in any storm simulations. Once ADCIRC receives the updated gradients of surface wave stresses from the couplers it resumes its forward progression in time applying the same wave stresses until the next time for it to exchange information with STWAVE.

ADCIRC computational nodes that lie outside of the STWAVE domains receive a default value, of zero for radiation stress gradients. In a similar way, STWAVE cell center points that lie outside of the ADCIRC domain have nothing to interpolate, however an attempt is made to extrapolate STWAVE neighboring cell information. In this case a search algorithm examines a maximum of ten neighboring cells to the logical left, right, above and below the target cell for a nonzero value. If a non-zero value is found then it is used, otherwise appropriate default values are used, with a zero value for surge and zero value for wind magnitudes.

The time period between each evaluation of STWAVE is constant throughout the coupled simulation. In fact, each “run period,” as shown in Figure 8-2, is for the same length of time except possibly for the first and last period which can have longer ADCIRC run lengths. The first ADCIRC run period can be longer to allow for spinning up the surge model. The last ADCIRC time period can be longer for continued evaluation of water elevations and circulation after the main thrust of the storm has passed in order to allow for modeling of the drainage of inundated areas. Prior to STWAVE being executed the first time, ADCIRC uses zero values for the wave surface stress gradients. Likewise after STWAVE stops execution, ADCIRC uses a zero value for the gradients of surface wave radiation stresses.

Since ADCIRC and STWAVE operate in a sequential pattern they do not run at the same time and can therefore share computer processors to perform their computations within the CSTORM-MS framework. If more than one STWAVE domain is used, each one is contained on a unique col-

lection of compute processors that do not overlap with other STWAVE domains, but all of which can be shared with ADCIRC. Different STWAVE domains are not allowed to overlap on a single computer processor due to the use of global variables within STWAVE and the possibility of memory overlapping between instances.

ADCIRC is configured to use tightly-coupled wave radiation stress gradients by setting the NWS parameter in the ADCIRC control input file (fort.15) to have a value of 400 plus whatever wind/pressure options are being used. For example, all the NACCS wind/pressure files are stored in what ADCIRC calls a type 12 format, indicating an OWI formatted data set, which would mean that a coupled ADCIRC-STWAVE wave/surge simulation would be indicated by setting NWS equal to 412. Similarly, STWAVE is configured to use tightly coupled water surface elevations and winds by setting the ISURGE parameter to 101 and the IWIND parameter to 101 in the STWAVE simulation control input file \*.sim. This indicates to STWAVE that it is using globally spatially-varying surge and wind fields that are being passed to it via the CSTORM-MS coupler. Finally, the CSTORM-MS controller uses a single text ASCII coupler file for ADCIRC-STWAVE tightly-coupled simulations which is named mf\_config.in in the CSTORM-MS version 1.1.07+. The purpose of this file is to define the necessary inputs parameters for coupling ADCIRC and STWAVE. In this version of the coupler application, ADCIRC is considered the primary component and time values are listed relative to ADCIRC time step numbers. When the ADCIRC mesh is given in geographic coordinates and the STWAVE grids are supplied in either State Plane or UTM coordinates, the coupler can perform the necessary coordinate transformation between those coordinate systems automatically. There is also an option to have both the ADCIRC mesh and all the STWAVE grids in the same local (meters) coordinate systems, in which case no coordinate mappings have to take place. The coupler file makes use of FORTRAN namelists (Adams et.al. 1992) constructs and currently there are three (3) namelists in the mf\_config file, the first is “service”, the second is “adc\_def”, and the third is “stw\_def”. A brief introduction to each of these namelists is given below.

The “**service**” FORTRAN namelist in the mf\_config.in file describes the type of coupling to perform and the datasets to share, along with the number of STWAVE grids and the starting and ending time of the STWAVE simulation. The FORTRAN namelist “**adc\_def**” within the mf\_config.in file describes run time information related to the ADCIRC model only (the

ADCIRC mesh file (fort.14) name, the number of computer processors to apply to the ADCIRC model simulation and when to start and end the ADCIRC portion of the simulation). A FORTRAN namelist “**stw\_def**” within the mf\_config.in file is listed once for each of the STWAVE grids and defines needed run time values related to each of the STWAVE model domains. A detailed description of each of these namelists as well as a sample CSTORM-MS coupler control file (mf\_config.in) is provided in Appendix D: mf\_config.in Details.

## 8.2 CSTORM Production System

### 8.2.1 Semi-Automated Scripting for CSTORM-MS Production Simulations

The SMS GUI is a convenient tool for setting up an initial CSTORM simulation and for viewing small numbers of the results. However, with the need to perform approximately 3500 CSTORM simulations, a semi-automated process was needed to efficiently and accurately set up and execute the simulations. To this end, two main semi-automated production scripts for setting up CSTORM-MS simulations (ADCIRC+STWAVE) were created, tested, and verified for historical extratropical storms, historical tropical storms, and synthetic tropical storms and have been executed for all production simulations. These scripts are written principally in BASH and make calls to Python functions, both of which are readily available on Linux and Unix systems and all the Department of Defense (DoD) Defense Shared Resource Center’s (DSRC) high performance computing systems (HPCs). A description of the purpose and functionality of the two scripts follows.

#### 8.2.1.1 Conversion of WAM output to STWAVE Boundary Input (Wam2Stwave)

Once the offshore deep water wave model WAM has been successfully executed and results verified the WAM special point location output files (.SPE2D) are made available to provide input boundary spectral information for the STWAVE model domains. A FORTRAN 90 code (wam\_to\_stwave\_for\_v6p0.f) is applied to post-process the WAM \*.SPE2D files for each of the STWAVE model domains that require boundary spectra information. In the NACCS production case, this process is required for nine STWAVE domains. The FORTRAN code requires user input files for each STWAVE domain and storm simulation. The input files provide the following necessary information: Start and end date/times for

the WAM outputs, frequency of the WAM output in each SPE2D file in minutes, the desired start and end date/times for the STWAVE boundary spectra (\*.eng file) information along with the frequency of sampling in minutes. This information is storm simulation specific, so these inputs need to be specified in an automated fashion. As such, a BASH script called `proc_wam2stave.sh` is used to actually supply the needed information for the input files, copy files into the correct locations for production use, and execute the FORTRAN codes to produce the STWAVE boundary spectra files (\*.eng). Upon execution of the shell script, the user supplies the following information: Storm Type (Historical or Synthetic), Storm Class (Tropical or ExtraTropical), storm number and the name of the CSTORM grid configuration templates. From this information, the script access the run parameters table associated with the particular Storm Class and Storm Type and reads in the storm information for the particular storm number supplied. The run parameters table is discussed in more detail below. The information from the run parameters table necessary for this script to function properly is the start and end dates/times of the STWAVE portion of the simulation and the STWAVE execution frequency in minutes. All the WAM SPE2D files are stored in a central location within the CSTORM-PS directory hierarchy and have a unique name identifying results by storm class, storm type and storm number. All the STWAVE \*.ENG spectral energy boundary files are also stored in a central location within the CSTORM-PS directory hierarchy and have unique names that identify them by Storm Type, Storm Class, Storm Number and associated STWAVE domain name. The `proc_wam2stwave.sh` script creates the STWAVE output directories, copies the correct WAM SPE2D files into that directory, copies the CSTORM grid configuration templates into that directory, fills in the input templates needed for the `wam_to_stwave_for_v6p0.f` routine with the correct information (Dates/Times and Frequency of input/output), then executes the FORTRAN code for processing the WAM2STWAVE results. Finally, the script performs a “cleanup” step where temporary working files are removed, run parameters and run log files are renamed, and archived together with the STWAVE \*.ENG files for production use.

#### 8.2.1.2 CSTORM-MS Model Setup and Execution Script (*master\_01.sh*)

In a similar fashion to the WAM2STWAVE script described above, the CSTORM-MS master setup script is written in BASH with calls to Python functions. The function of this script is to completely set up all the necessary inputs for a single CSTORM-MS simulation (coupled

ADCIRC+STWAVE). The required inputs for a single simulation are the following:

1. For ADCIRC – the mesh file (fort.14), the model control file (fort.15), the nodal attribute file (fort.13), and the wind and pressure files (fort.22, fort.221, fort.222, fort.223, fort.224)
2. For each STWAVE domain – the grid depth file (\*.dep), the friction file (\*.friction.in), the model control files (\*.sim), and the boundary spectra file (\*.eng) where used
3. For the CSTORM-MS coupling configuration, an mf\_config.in file that specifies when each model (ADCIRC and STWAVE) is to run, when they are to exchange information, and what information they are to exchange
4. inputs for preparing (“prepping”) ADCIRC for parallel execution using the ADCPREP code
5. queue submission scripts for executing ADCPREP and the coupled CSTORM-MS (ADCIRC+STWAVE) simulation. The script requires the following information for each storm:
  - a. Storm Type (Historical or Synthetic)
  - b. Storm Class (Tropical or Extratropical)
  - c. Storm Number
  - d. the name of the CSTORM grid configuration templates
  - e. Tidal scenario number
  - f. River input conditions
  - g. Sea Level change configuration number
  - h. Cold or Hot starting ADCIRC
  - i. estimated simulation (CSTORM-MS) run time in hours
  - j. an email address for the user submitting the job.

From this input, the script finds and reads the user-specified run parameters table based on the storm class and storm type, finds the user-specified storm number in the table and reads in the specific storm information from the table, as described later. Next, a run directory is created within the production area of the file disk space and all the temporally static files are copied to the run directory including: grids, meshes, friction files, the storm-specific wind and pressure files, and the storm-specific STWAVE boundary spectra files. In addition, all of the model input templates that require updating with the storm-specific time-dependent run information supplied in the run parameters table are copied to the storm-specific run directory. The script fills in the ADCIRC fort.15 file template, all the

STWAVE \*.sim file templates, and the mf\_config.in file template, including determining the tidal potential factors if required for ADCIRC's input file for the specific storm selected for simulation. The script also copies all the necessary model executable codes into the directory (adcprep.exe and cpadcirc.exe – the single executable for the coupled ADCIRC+STWAVE)). The script creates several Portable Batch System (PBS) and BASH script files for:

1. submitting the ADCPREP step
2. executing the CSTORM-MS coupled ADCIRC+STWAVE simulation
3. renaming all the generic ADCIRC outputs with unique run identification information
4. launching the CSTORM-PVz
5. compressing and tarring the results
6. storing all the results to long term archive.

The script also constructs the ADCIRC fort.22 file needed for specifying the number of wind and pressure files and synchronizing those files within the ADCIRC simulation period by using information from the run parameters table. Figure 8-3 illustrates the cascading process initiated by the CSTORM-PS master script. The CSTORM-PS master script also creates a metadata run log that contains all the inputs for the particular simulation it just created. At the end of the setup process the master script submits the first batch script to the computer queue for execution. After successful completion of each batch script, the next script is automatically submitted for execution using the appropriate computer resources (processors and queue types) for that particular job. This process reduces the hands-on human interaction in the simulation process, thus reducing potential for human error. The QA/QC process, however, includes qualified scientists reviewing model settings, files, and results for accuracy and completeness.

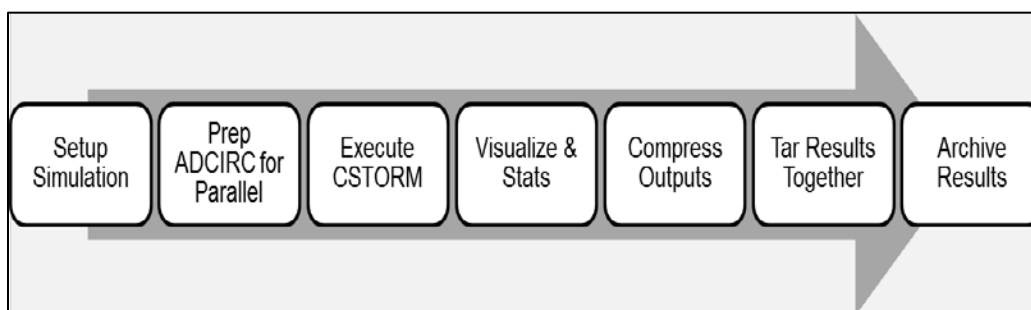


Figure 8-3. Schematic showing the sequence of operations performed during the CSTORM-PS process.

### 8.3 Model Coupling Timing

### 8.3.1 Run parameter table

There are three distinct run parameter tables which correspond to:

- Historical Extratropical Storms
- Historical Tropical Storms
- Synthetic Tropical Storms.

The run parameters tables specify timing information for each storm and include:

1. start and end dates/times for winds/pressure files along with the time frequency of the data supplied in those files, dates/times are supplied as a 4 digit year, 2 digit month, 2 digit day, 2 digit hour
2. the start and end dates/times for nearshore STWAVE model execution and the time frequency of the STWAVE snaps
3. the start and end dates/times for when winds/pressures are to be applied to ADCIRC
4. the tidal/river spin-up times for the ADCIRC portion of the simulation
5. five times per storm for random tidal hot-starting, and
6. three potential sea level change/steric height adjustment values.

A portion of the run parameters table for historical extratropical storms is provided in Table 8-1.

**Table 8-1. Excerpt from the run parameters table for historical extratropical storms 29-35.**

Storm ID	Met Start Date	Met End Date	Met Int (min)	STW Start Date	STW End Date	STW Int (min)
29	1972121200	1972122000	60	1972121418	1972121718	60
30	1973012500	1973020200	60	1973012802	1973013102	60
31	1974112800	1974120600	60	1974113021	1974120321	60
32	1976012900	1976020600	60	1976013122	1976020322	60
33	1977010600	1977011400	60	1977010907	1977011207	60
34	1977101000	1977101800	60	1977101307	1977101607	60
35	1978011600	1978012400	60	1978011908	1978012208	60

ADC Wind Start Date	ADC Wind End Date	Tidal Spin (days)	Random Tide/IHOT Val 1	Random Tide/IHOT Val 2	Random Tide/IHOT Val 3	Random Tide/IHOT Val 4
1972121200	1972122000	14.0	2433000	2500920	1355400	1482300
1973012500	1973020200	14.0	3364620	1432140	2051100	2594520
1974112800	1974120600	14.0	2892300	2401020	1819860	3067200
1976012900	1976020600	14.0	1756800	2935200	2763180	2773620
1977010600	1977011400	14.0	3229320	2259960	1425060	3099780
1977101000	1977101800	14.0	1662900	3696180	2828940	2623140
1978011600	1978012400	14.0	2783040	2610120	2446200	1662180
Random Tide/IHOT Val 5	SLC/Steric Val 0 (m)	SLC/Steric Val 1 (m)	SLC/Steric Val 2 (m)			
3085740	0.095	1.095	0.595			
2197740	0.096	1.096	0.596			
1418160	0.105	1.105	0.605			
3297060	0.096	1.096	0.596			
1713360	0.090	1.090	0.590			
2175420	0.182	1.182	0.682			
3382140	0.090	1.090	0.590			

### 8.3.2 Specific information for the historical extratropical storms run parameters

The wind and pressure files for the historical extratropical storms were all based upon a peak water level date/time from measurements and the time frequency for those wind and pressure files were all provided by OWI as hourly data. The peak water level date/time is used to center the near-shore STWAVE simulations times. Specifically, STWAVE simulations are started 36 hours prior to the peak water level date and continue until 36 hours after the peak water level date and occur on an hourly basis.

STWAVE is a steady-state wave model and since the wind fields are changing hourly, it was determined that computing updated wave snaps at the same frequency as the wind updates was sufficient. Each ADCIRC simulation applied the entire supplied wind/pressure file time period and for tidal simulations made use of a 14-day tidal spin-up period to adequately allow for the circulation solution to evolve from an at rest state to a fully-

evolved and transient-free state prior to applying the winds, pressures and waves.

## 8.4 CSTORM-PS Data Organization and Description

The CSTORM storm simulations are divided into two types: synthetic and historical, then further divided into two classes: tropical and extratropical storms developed for this study. Note that there are no synthetic extratropical storms. Each storm class/type combination has a number assigned starting at 1. Each individual simulation is further identified based on additional run parameters, including Tides (no tides, real tides, random tides), Rivers (no river, constant river, real river flows), sea level change (no change, options 1 - 1 meter of rise), options 2 - 0.5 meter of rise). Each output file is named with a prefix (RNAME) that uniquely identifies the simulation. The RNAME value is constructed based on six simulation characteristics as outlined below in Table 8-2.

**RNAME = NACCS\_CLASS\_RNUM\_TYPE\_Tides\_TN\_SLC\_SN\_RFC\_RN\_**

Table 8-2. A listing of the simulation characteristics and their description used in constructing a unix prefix name for simulation results.

Characteristic	Description
CLASS	Storm classification: TP – Tropical or ET – Extratropical
RNUM	Storm Number – Ranges from 0001 to 1050
TYPE	Storm Type: SYN – Synthetic or HIS – Historical
TIDES_TN	Tidal Scenario Option. TN ranges from 0 to 5 0=no tide; 1-specific tide, 2-random tide
SLC_SN	Sea Level Change/Steric Adjustment Scenario. SN ranges from 0 to 2 (0-steric adjustment only, 1-steric adjustment + 1 m SLR; 2 – steric adjustment + 0.5 m SLR)
RFC_RN	River Forcing Conditions. RN ranges from 0 to 2 0 – no inflow or default inflows, 1 – specific (real) inflows, 2 – random inflows

An example of RNAME for a Tropical Synthetic storm number 1043 using the first random tide hot start value described in the run parameter table and the default sea level condition/steric adjustment and default river forcing conditions would be given as:

**NACCS\_TP\_1043\_SYN\_Tides\_2\_SLC\_0\_RFC\_0\_.**

For each CSTORM-MS run, the input and output files that are to be stored long term are compressed using gzip and then are combined (“tarred”) together into a few “tar ball” files grouped in a meaningful way. Each tar file

also uses the prefix naming convention (RNAME) also. For the NACCS numerical modeling study, there are 10 STWAVE domains applied in the CSTORM-MS simulations, each archived with two tar files: “Outputs” and “SurgeWind”. There are 4 ADCIRC tar files, 1 STWAVE station tar file, 1 CSTORM-MS tar file, plus 5 additional tar files resulting from the visualization process. A PDF report of all the QA/QC plots and statistics is also archived. A detailed description of the tarred contents and the individual files for a CSTORM-MS simulation is provided in Appendix E: “Tar Ball” details and Appendix F: Model and CSTORM File Descriptions, respectively.

Files are stored by class/type, configuration, and run number (RNC) in a base directory for a given computer system, e.g.  
 basedir/NACCS/CSTORM\_Sims/

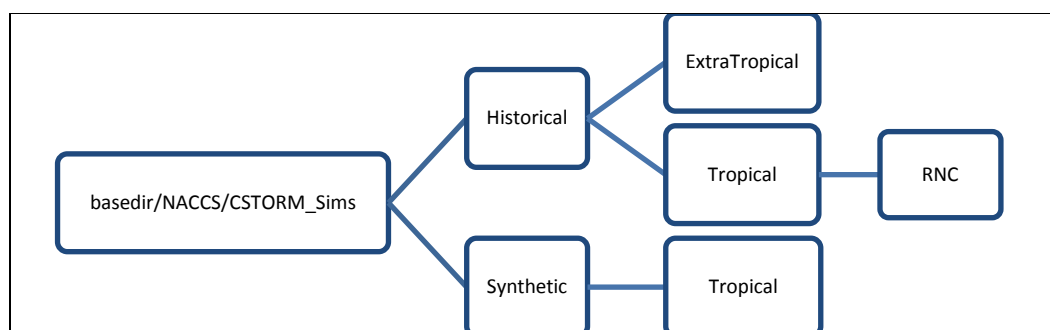


Figure 8-4. A schematic description of the general directory structure for simulation classifications.

Within a given Storm type and class, the simulation directory, represented as RNC in Figure 8-4, is named according to simulation properties as follows:

**RNC =**  
**Run\_NM\_Tides\_TN\_SLC\_SN\_RFC\_RN\_WAV\_WN\_GCP\_PN\_**  
**UID\_IDV**

where

- Run\_NM = Storm Number, NM = 0001 to 1050
- Tides\_TN = Tidal Scenario, TN = 0 to 5
- SLC\_SN = Sea Level Change/Steric Adjustment Scenario, SN = 0 to 2
- RFC\_RN = River Forcing Conditions, RN = 0 to 2

- WAV\_WN= Waves Off/On, WN = 0 or 1 (Note that WAV\_WN was not used in the NACCS modeling project)
- GCP\_PN = Grid Configuration Packet Name
- UID\_IDV = User Identification, IDV = person performing simulation

## 8.5 Storm Speed and Evaluation Frequency

The wind and pressure files for the synthetic tropical storms were all supplied at five minute time increments in order to better represent some very fast moving storms. Each of the 1050 storms is designed for a particular region (Region 1, 2, or 3) for which it is included for statistical purposes in the context of the JPM-OS. Region 3 covers the area between latitudes 36.5 deg and 39.0 deg north, Region 2 covers the area between latitudes 39.0 deg and 41.5 deg north, and Region 1 covers the area between latitudes 41.5 deg and 45.0 deg north. Each of the storms is also classified as either a land-falling or by-passing storm. A storm definition table was provided by OWI that details for each of the 1050 synthetic tropical storms, several key pieces of information.

For the purpose of determining the CSTORM-MS run parameters table, the key information from that table, is the land-falling/by-passing classification, the region of impact, the land-fall location coordinates if a land-falling storm, and the reference location coordinates for the storm and the forward speed of the storm. The reference location coordinates for land-falling storms is 250 km away from the land-fall location of the storm. The reference location coordinates for by-passing storms is the location when the storm exits the impact region, e.g. at latitudes 39.0 (for Region 3), 41.5 (for Region 2) and 45.0 (for Region 1) deg north. The forward speed of the storms ranged from a slow moving 6.5 knots to a very fast moving 47.5 knots with the mean forward speed over all storms being 21.96 knots with a standard deviation of 9.0985 knots. Figure 8-5 shows the distribution of the storms based on forward speed. The storms were then grouped into three speed categories (slow, moderate, and fast) with slow storms having a forward speed of between 6.5 knots and 12.9 knots, moderate storms having a forward speed of between 12.9 and 31.1 knots, and fast storms having a forward speed greater than 31.1 knots. The range of forward speeds in the moderate category falls within +/- 1 standard deviation about the mean forward speed. Figure 8-6 shows the number of storms for each category.

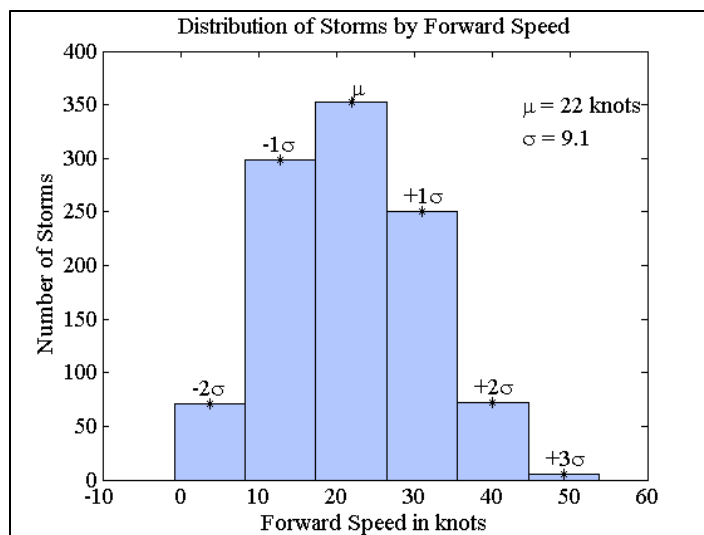


Figure 8-5. Distribution of synthetic tropical storms by their forward speed.

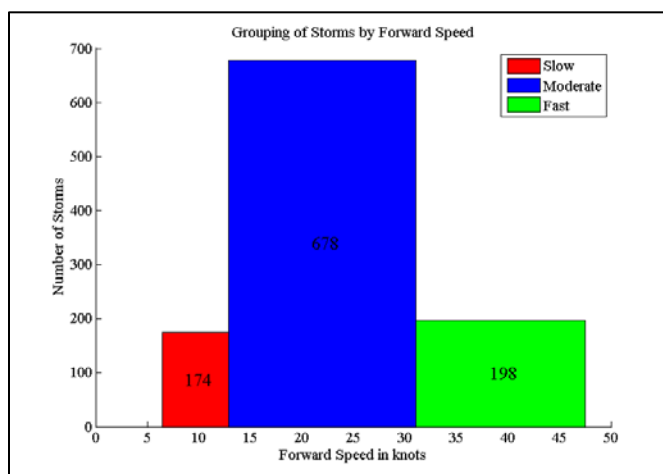


Figure 8-6. Grouping of synthetic tropical storms into three forward speed categories and the number of storms in each category.

The timing frequency of STWAVE snaps for the CSTORM-MS solution is based on the forward speed classification of the storm. Slow moving storms have STWAVE snaps computed every 60 minutes, moderate forward speed storms have wave snaps every 30 minutes, and the fast moving storms have wave snaps computed every 15 minutes. Based on the forward speed and the time increment between snaps, the approximate distance the storm travels between wave snaps is between 18 and 20 km. For each synthetic tropical storm, a total of 97 STWAVE snaps are computed, with 66 snaps occurring before the land-fall / region exit location time, one snap at landfall, and 30 snaps after landfall. This corresponds to 4

days, 2 days, and 1 day of STWAVE wave snaps for the slow, moderate and fast moving storms respectively.

The wind/pressure domains are larger than the ADCIRC domain. The ADCIRC domain boundary starts at -60.0 deg west longitude. In order to avoid model instabilities and to reduce overall model execution times, the CSTORM-MS coupled ADCIRC+STWAVE simulations start using winds and pressure when the storm track crosses the -62.0 deg west longitude. The STWAVE simulations start and end date/times are keyed off either the land-fall time for land-falling storms or the reference time indicating when the storm leaves the impact region for bypassing storms. Figure 8-7 and Figure 8-8 show two examples storm tracks, one land-falling and one bypassing, and indicate when the ADCIRC and STWAVE simulations are started and ended along the track.

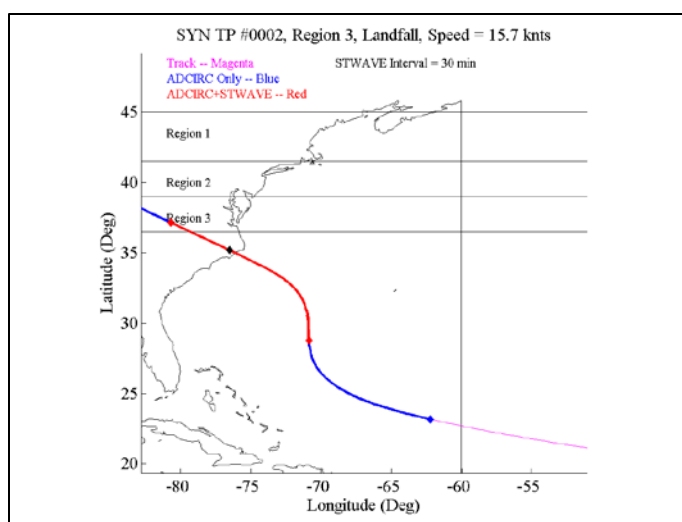


Figure 8-7. Synthetic tropical storm number 2's track (a land-falling storm) and indicators for ADCIRC only (blue) computations and ADCIRC+STWAVE (red) computations along the track.

## 8.6 CSTORM Production Visualization

Visualization tasks are integrated throughout the workflow in physics based numerical modeling such as the models used in the CSTORM-MS. Manual hands-on methods using desktop software are usually employed for building and creation of individual models with a small number of simulation requirements. The SMS software provides an appropriate framework and GUI for performing visualization tasks associated for these small scale efforts. However, the NACCS requirements of simulation and execution of over 3500 events necessitates an automated solution for view-

ing model data sets and results for which manual methods could not be completed within reasonable time frames. Thus, a visualization component (CSTORM-PVZ) was created within the CSTORM-MS framework and automation scripts to produce graphics, descriptive statistics, and digital reports for all NACCS results. Visualization scripts are written in Python with one primary script which controls initiation and all aspects and products of the visualization workflow.

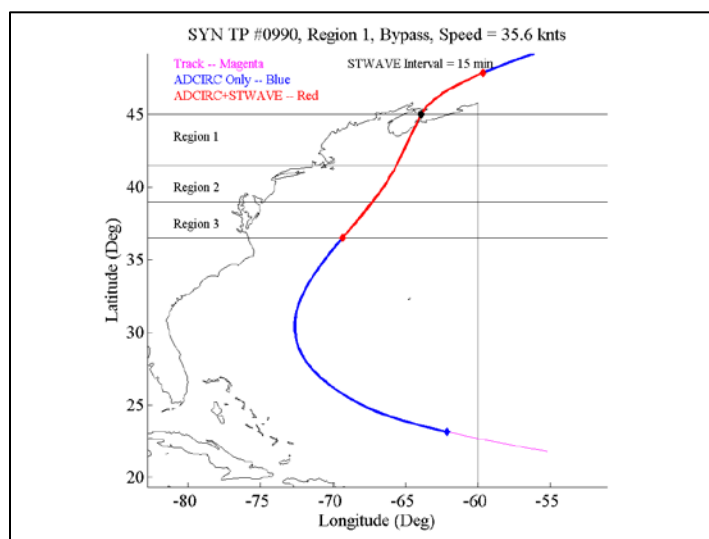


Figure 8-8. The track for synthetic tropical storm number 990 (a by-passing storm for Region 1) and indicators for ADCIRC only (blue) computations and ADCIRC+STWAVE (red) computations along the track.

Creating graphics on high performance computing (HPC) systems can be challenging as the primary focus has traditionally been on computations rather than visualization. Traditional HPC systems devoted to computations (no graphics processors) are separated from systems whose emphasis is visual products (with many graphics processors). These configurations detailed the needs for data transfers and creation of specialized software tools for viewing model results and creating graphics. However, computer scientists have long developed tools for “off screen” rendering which creates graphics entirely through software circumventing the need for graphic hardware components. Albeit, these tools are not as fast as direct hardware rendering, the resultant products are of the same high quality.

The open source ParaView software was selected as the tool to render the NACCS CSTORM-MS visualization products. ParaView is a fully parallel-

ized code that is open source and readily available on most of the DoD HPC systems. ParaView can perform both hardware accelerated (using graphics processors if available) as well as “off-screen” software-based rendering. All of the NACCS CSTORM-MS simulations were performed on DoD HPC systems that did not use dedicated graphic processors.

The main CSTORM-PVz Visualization Python scripts creates and builds a hierarchy of ParaView Python scripts which drive ParaView and create all graphic results. These scripts will automatically generate peak plots of both ADCIRC and STWAVE results including peak surge, wave heights, and wave periods for all NACCS storms. The following is a description of the functionality and purposes of the primary Python script and the subsequent ParaView scripts.

#### **8.6.1 CSTORM-PVz Pre-Configuration Setup**

Several items, codes, templates, grid files, etc., must be created and exist in the CSTORM project directory structure before CSTORM-PVz scripts can be executed. ParaView can read a large set and variety of data sets and formats as well as imagery and raster image files. Spatial geometry formats both 2d and 3d include point sets, rectilinear grids, polygonal meshes, and time series data. However, Paraview does not have a native reader for directly importing ADCIRC and STWAVE geometry. Therefore a C-program (adc2vtk.x) must be manually executed to convert the ADCIRC mesh to an ASCII ParaView format called “VTK” which stands for Visualization Toolkit. The VTK format is a historic format created by the Paraview software creator, Kitware, Inc. The VTK version of the NACCS ADCIRC mesh is created and stored in the project “Codes/Vizscripts/grids/ADCIRC” sub folder. Each of the STWAVE grids must also be converted to VTK format. This is done using the interactive version of ParaView. The VTK version of each NACCS STWAVE mesh is created and stored in the project “Codes/Vizscripts/grids/STWAVE” sub folder. Additionally, two VTK files for each STWAVE grid are required, one in the default rectilinear projection, which for the NACCS study were all UTM, and one in the Geodetic Latitude and Longitude coordinate system.

The large project spatial domain covering the Atlantic coast from southern Virginia to northern Maine was partitioned into six regions for creation and review of ADCIRC results. The spatial extents and region names are coded in a file called “options.viz”. This file also contains the STWAVE

grid names, given by a three letter code, and titles to be used for labeling STWAVE plots.

### 8.6.2 CSTORM-PVz Script Initiation and Creation

Once the VTK format files and the options.viz files are created, the CSTORM-PVz script can be initiated. The main script can be initiated interactively and from the CSTORM-MS automation bash scripts by entering “python naccs\_vizPlots\_3.py” followed by optional and required arguments. Primary options are scenario, run check, units, and to plot or not to plot waves (Appendix G: CSTORM-Pvz Options).

The script assumes the ADCIRC results will be plotted (unless only a run check is entered), and the stormNumber(s) are expressed in the full run directory names. There must be at least one run directory (storm) to plot. An example command would be “python naccs\_vizPlots\_3.0.py -u feet -w Run\_0120\_Tides\_2\_SLC\_0\_RFC\_0\_GCP\_NAC11\_UID\_xxxxxxx”.

Given these options, the script will create a sub folder called “vizout” in the storm run directory and build ADCIRC and STWAVE Paraview batch scripts in this sub folder. The main script will check to ensure that all required files are present as well as copy and convert the ADCIRC peak surge file (maxele.63) to a VTK format. There are two template ParaView batch python scripts (one for ADCIRC, and one for STWAVE rendering) in the project “Vizscripts” folder which are copied and modified with the specific storm run ADCIRC and STWAVE information and specific run name files.

Three storm-specific ParaView python batch scripts are created for EACH ADCIRC “zoom” region. The first script reads the VTK format maxele.63 file and “clips” this according to the bounding coordinates specified in the options.viz file. This script also converts elevation units to feet (if specified) and computes and extracts the zero contour line (the coast line) for the region. The second script plots the region specific peak surges, coast line, as well as the storm track (if the track crossed within this region). The color scales for this plot span the full range of the peak surge elevations. The second script plots the same data sets but at a standard color scale across all NACCS storms (range from 0 to 20 feet). Figure 8-9 shows an example ADCIRC Chesapeake Bay peak surge contour plot.

Four storm-specific ParaView python batch scripts are auto-generated for EACH STWAVE grid. Two of the scripts plot the maximum significant wave heights ( $H_s$ ) (over the entire storm event) in two color ranges, the

first for the entire data range, and the second uses a standard color range (0 to 10 feet) across all NACCS storms. Two separate scripts plot the peak wave period ( $T_p$ ) (over the entire storm event) in two color ranges, one for the data range and one standard across all NACCS storms. Figure 8-10 and Figure 8-11 show examples contour plots of maximum significant wave heights ( $H_s$ ) and peak wave periods ( $T_p$ ) for NACCS synthetic tropical storm number 180.

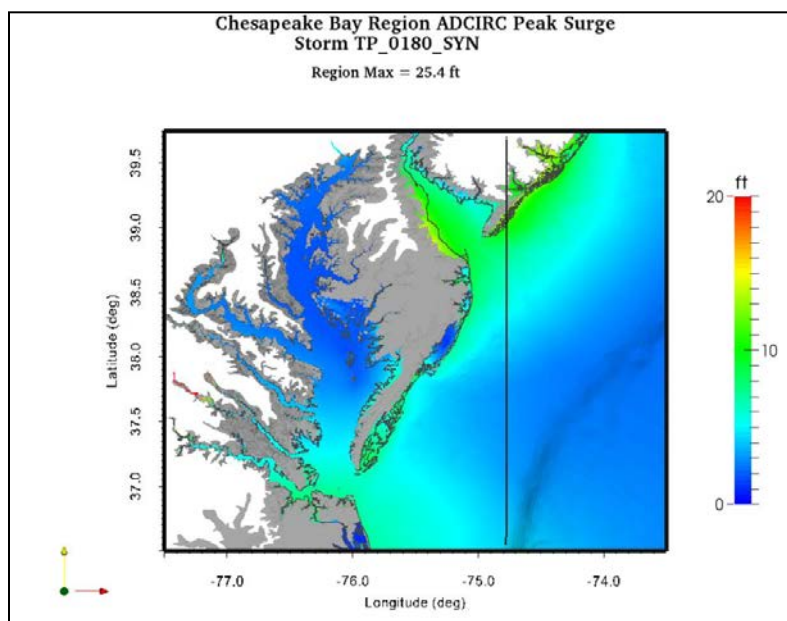


Figure 8-9. Chesapeake Bay region ADCIRC peak surge contour plot for synthetic tropical storm number 180.

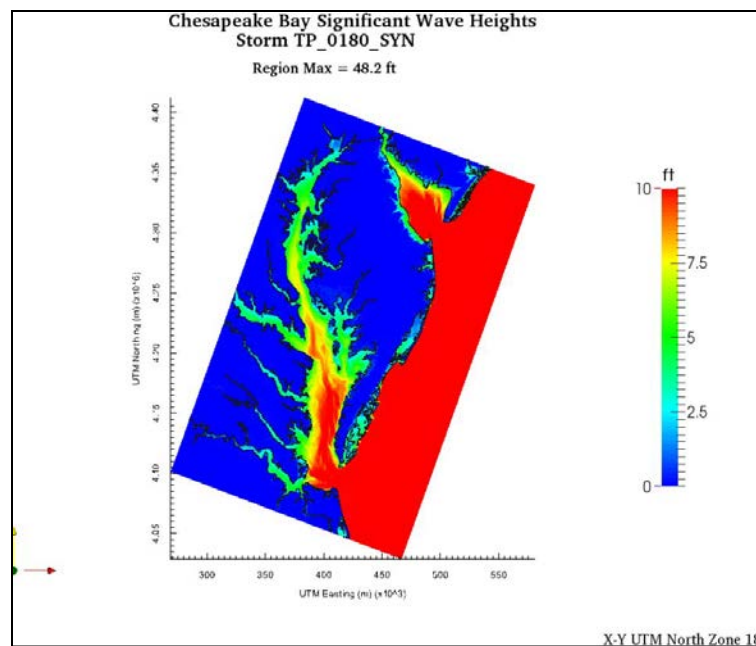


Figure 8-10. Chesapeake Bay STWAVE significant wave heights contour plot for synthetic tropical storm number 180.

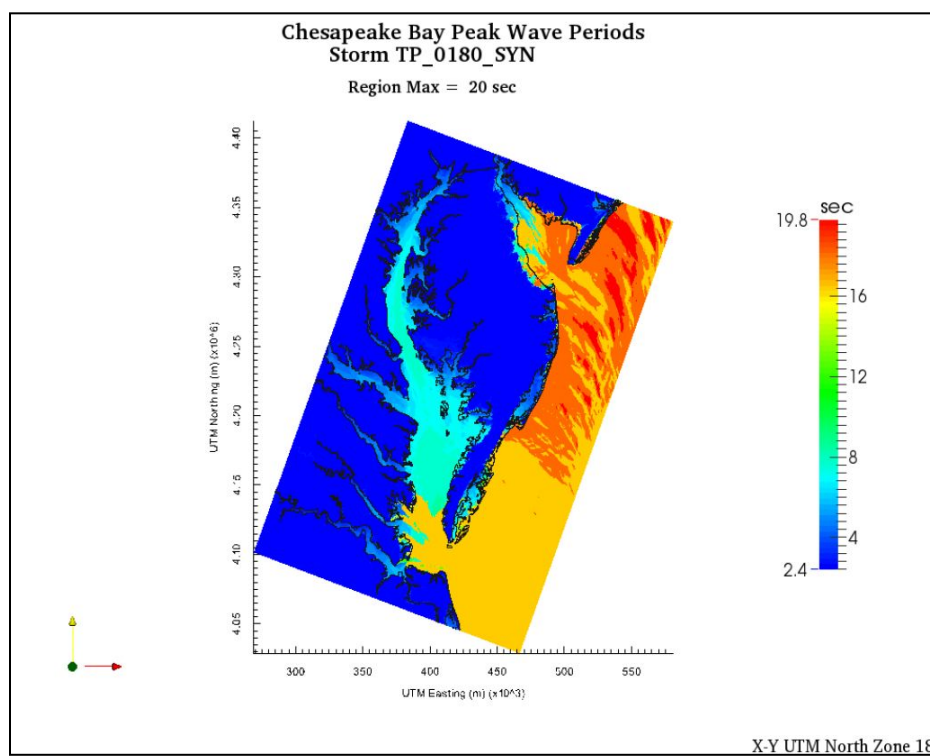


Figure 8-11. Chesapeake Bay STWAVE peak wave periods contour plot for synthetic tropical storm number 180.

One additional run-specific ParaView python batch script is automatically generated to create one overview plot of the all maximum significant wave heights (Hs) for all ten STWAVE grids. The image provides insight on wave results for the entire project area produced by all of the STWAVE grids. Figure 8-12 shows an example of this contour plot for synthetic tropical storm number 180. Graphics generated from individual STWAVE grids are rendered from south to north, overlaying the previously rendered images in the overlap regions. Recall that STWAVE results in the overlap regions are selected based on maximum radiation stress gradients in the CSTORM-MS computations, which is not reflected in these static diagnostic images.

### **8.6.3 CSTORM-PVz Script Execution Workflow and Parallelization**

The ParaView python scripts are executed and controlled by two PBS scripts (one for ADCIRC and one for STWAVE) along with supplemental BASH shell scripts. The ADCIRC PBS visualization script is submitted first and is configured to run each of the ParaView python scripts in parallel (14 total with 2 scripts for each region), with each script using 16 CPUs. The STWAVE PBS script is submitted after the ADCIRC PBS script. This script in combination with separate BASH shell scripts initially assembles the needed STWAVE files for each grid into temporary folders. The maximum overall snaps of significant wave heights and peak wave periods are extracted for each STWAVE grid in parallel. These peak files are then moved to the “vizout” folder and appended to the grid-specific STWAVE VTK format file. These tasks are all performed in parallel. Once these tasks are completed, the four ParaView python batch scripts for each STWAVE grid, and the final script to plot the overview of maximum wave heights contours for all grids, are executed in parallel, each using 16 CPUs.

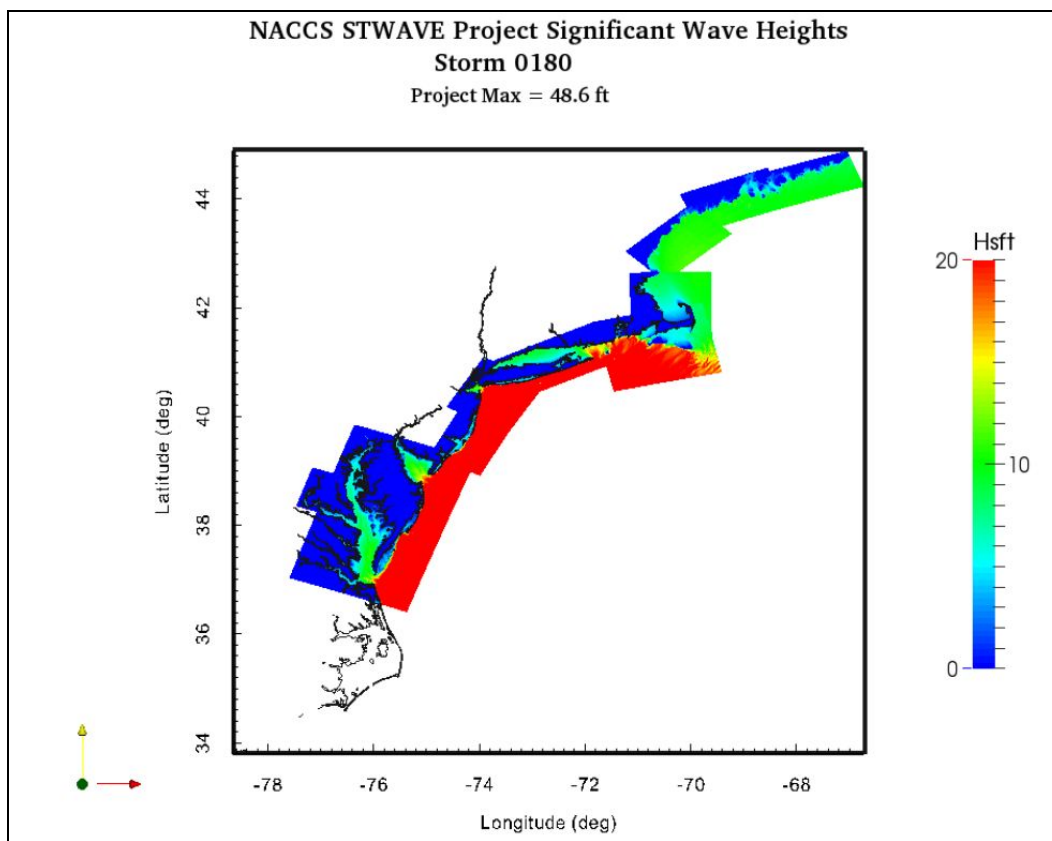


Figure 8-12. STWAVE peak wave heights combined overview contour plot for synthetic tropical storm number 180.

#### 8.6.4 CSTORM-PVz Reports and Tar Files Creation

Once both the ADCIRC and STWAVE graphic products are created, a final python script is executed which compiles all graphics and diagnostics text files into a report in PDF format. These individual storm reports are collected and reviewed for all NACCS storms as part of the full QA/QC process. Following creation of the PDF report, all files are compressed and collected into appropriate TAR files for archiving.

#### 8.6.5 CSTORM-PVz QA/QC Data and Reports

In addition to the graphic products, the CSTORM-PVz scripts perform automated simulation completion diagnostics for QA/QC of all storms. The diagnostics include an indication of a successfully completed simulation, tabulation of maximum and minimum water levels, and for each STWAVE grid, wave heights and peak wave periods.

ADCIRC information includes the total number of wet nodes, and the maximum, minimum, and mean water levels. The time to peak maximum is also extracted and the average times of wetting are computed for nodes greater than 15, 20, 25, 30, and 35 feet. The latitude and longitude location of the maximum water level over the entire simulation is also listed in the report. A sample of ADCIRC information is shown in Figure 8-13.

ADCIRC Grid/Run/Info			Mean Time to Peak (Hours)		
Total Number of Nodes	=	3110470			
Number of Wet Nodes	=	1581649	100.1		
Maximum maxeta (feet)	=	22.8826	0		
Minimum maxeta (feet)	=	0.3576	40.9		
Mean maxeta (feet)	=	4.9455	100.1		
Number Nodes maxeta > 15 ft	=	2107	39.4		
Number Nodes maxeta > 20 ft	=	57	79.5		
Number Nodes maxeta > 25 ft	=	0	0		
Number Nodes maxeta > 30 ft	=	0	0		
Number Nodes maxeta > 35 ft	=	0	0		
Location of maxeta	=	927289	-77.151	37.889	-5.00

Figure 8-13. Example ADCIRC QA/QC diagnostics and information.

STWAVE diagnostics information includes the maximum peak wave height over the entire storm event over the entire grid domain, along with the maximum and minimum average wave heights. Additionally, the percent of “Final Convergence Sweeps” over all snaps is listed to ascertain model convergence. Example STWAVE diagnostics information is shown in Figure 8-14.

SIM	Max Max Wave Ht	Max Avg Wave Ht	Min Avg Wave Ht	%FCS
EMA.sim	11.2	5.0	2.5	100.0
CME.sim	13.9	5.2	2.2	100.0
SMA.sim	31.2	12.6	5.0	100.0
SME.sim	14.5	7.7	3.1	100.0
LID.sim	40.5	11.2	3.1	100.0
NNJ.sim	45.0	19.2	4.5	100.0
NME.sim	14.8	6.5	2.9	100.0
WDC.sim	3.6	0.2	0.1	96.9

CNJ.sim	48.2	22.1	4.0	100.0
CPB.sim	48.4	8.3	1.3	100.0

Figure 8-14. Example STWAVE QA/QC diagnostics and information.

## 8.7 CSTORM-MS Base Simulations

The original scope of work considered 1000 production storms to be simulated, analyzed, and incorporated into the Coastal Hazards System. This included 900 synthetic tropical storms and 100 historical extratropical events. However, the NACCS team included an additional 150 synthetic tropical storms to fill out the statistical parameter space more completely and to allow for a 5% loss rate if some storms did not run to completion, meaning that a 95% completion rate would be sufficient for performing statistical analysis. The final total number of storms to be simulated (1150) then included 1050 synthetic tropical storms and 100 historical extratropical events.

To maintain organization of the thousands of simulations being run, several Excel spreadsheets were created using Google docs which allowed for the members of the production team to edit and share simulation status information in one location. The two main spreadsheets were for the 1) 100 extratropical storm simulations and 2) 1050 tropical storm simulations with each spreadsheet including the three forcing conditions (base, with tide, and with tide/sea level change). These spreadsheets allowed the production team leader to organize the run assignments to members of the NACCS team and create columns to mark completion of each step for every simulation with the date completed. Up to 6 members of the NACCS team were assigned storms to run at a given time. Organization was imperative for this project when coordinating completion of over 3000 simulations in order to prevent duplication of efforts and aid in minimization of errors.

After receipt of the 1150 wind and pressure fields from OWI, production began with the storm wind and pressure fields applied to the “base” condition. Base conditions were run on the HPC Garnet CRAYXE6 within a special “non-purge” area of 175 Tb allocated specifically for the NACCS team. The base condition simulations do not include tides, river inflows, or sea level change. All 100 historical extratropical and 1031 of the 1050 synthetic tropical storm simulations were successfully completed. The successful completion of a simulation is verified by assuring that the simu-

lation "log file" exists and checking it for errors and that peak water level and wave files have been created. In addition, the visualization tool developed for this study is used in the post-processing phase as part of the quality control process and involved inspecting the 55 plots created for each of the simulations for any "abnormalities". The remaining 19 storms have undergone the diagnostic process and will be submitted with the final product statistics and Coastal Hazards System in January 2015.

After a simulation successfully completed it was necessary to "clean" and compress all model input files and model results in order to maintain enough disk space to run the remaining simulations. A single storm simulation would typically require about 300 GB of disk space and with limited space on Garnet it was not feasible to store all the simulations and files on the machine at one time. To "clean" the non-purge area on Garnet, a script was created to remove files that were only temporarily needed and not required for permanent storage for a simulation, for example, the ADCIRC grid that was common to all simulations. Subsequent to the "cleaning" procedure, a compression script was submitted to "zip" or compress the remaining model result files thus creating more usable disk space. The clean and compress "log file" was then checked for successful completion and errors. The additional "tar" and "archive" scripts would then run after the completion of compression, to combine and store the files, respectively. Once again the "log file" is checked for successful completion and errors. The number of files and file sizes archived (on the HPC Gold storage utility) are then compared to the number of files and file sizes on Garnet to make sure that all files for each simulation are properly stored. The steps described here for processing and post-processing model simulations were completed for all 3000+ model simulations.

## 8.8 CSTORM-MS with Tides Simulations

In order to complete the "With Tide" and "With Tide and SLC" simulations within the August through October 2014 timeframe, the production team explored other means for increasing production throughput. Allowances were made to grant the NACCS production team access to a "high priority" queue on the Garnet system in order to proceed through the queuing system faster than the "standard" queue. Additionally, the HPCMP office gave the NACCS production team access to the Navy's newest HPC system, Armstrong, a Cray XC30 which at the time was in a "pioneer testing" phase and not in full production mode. A total of 19200 CPUs were dedicated for the NACCS production teams' sole use on Armstrong, enabling a continu-

ous production stream for 8 model simulations simultaneously. In addition, the hardware and compilers on Armstrong provide approximately a 2.5 times speed up over Garnet for a single simulation, meaning a 12-hr simulation on Garnet completes in 5 hours on Armstrong. As production continued the “high priority” queue was still not adequate in providing enough throughputs so the NACCS team was given access to the “urgent” queue on both Garnet and Armstrong systems. This allowed for completion of approximately 50-60 simulations in a given day.

The “With Tide” condition simulations include tides and river inflows. Details about the river inflows are in Chapter XX. The total “With Tide” simulations completed are 1114 of the 1150 storms received. The remaining 36 storms have undergone the diagnostic process and will be submitted with the final product statistics and Coastal Hazards System in January 2015.

## **8.9 CSTORM-MS with Tides and Sea Level Change Simulations**

The “With Tide and SLC” condition simulations were run on Garnet and Armstrong machines utilizing the “urgent” queue. The “With Tide and SLC” conditions include tides, river inflows, and a one (1.0) meter increase in sea level.

The total “With Tide and SLC” simulations completed are 1084 of the 1150 storms received. The remaining 66 storms have undergone the diagnostic process and will be submitted with the final product statistics and Coastal Hazards System in January 2015.

## 9 Summary

This chapter summarizes the application of a suite of high-fidelity numerical models for the NACCS. The effort was conducted to provide information for computing the joint probability of coastal storm forcing parameters for the North Atlantic Coast of the United States because this information is critical for effective flood risk management project planning, design, and performance evaluation. The numerical modeling study was performed using the high-fidelity models within the CSTORM-MS. The NACCS numerical modeling study produced nearshore wind, wave and water level estimates and the associated marginal and joint probabilities. Documentation of the statistical evaluation is provided in a companion report (Nadal-Caraballo et al. 2015).

The first major step in the numerical modeling effort was to select a suite of storms to simulate that are statistically significant to the region of interest. The NACCS coastal region is primarily affected by tropical, extratropical, and transitional storms. It is common to group the storms into statistical families of tropical and extratropical with transitional storms that were once tropical being mostly categorized as tropical. In this study, both tropical and extratropical storms were strategically selected to characterize the regional storm hazard. Extratropical storms were selected using the method of Nadal-Caraballo and Melby (2014) using an observation screening process. The tropical storm suite was developed using a modified version of the joint probability method (JPM) methodology (Ho and Myers 1975) with optimized sampling (JPM-OS) methods from Resio et al. (2007) and Toro et al. (2010). In this process, synthetic tropical storms are defined from a joint probability model of tropical cyclone parameters. The cyclone parameters describe the storm size, intensity, location, speed, and direction. This approach to statistical sampling is specifically designed to produce coastal hydrodynamic responses that efficiently span practical parameter and probability spaces to the study area.

With the storms selected, OWI generated extratropical wind and pressure fields for the 100 historical extratropical events identified in the storm selection process for the NACCS effort for two working grids: the original WIS Level II domain as well as a 0.125-deg domain covering 36-45N and 78-66W (NACCS domain covering Virginia to Maine). OWI performed a

reanalysis of the storm core of winds generating the maximum ocean response and included the assessment/assimilation of coastal station data such as National Weather Service reporting stations and National Ocean Service stations not considered as part of the WIS effort. Background fields were sourced from the NCEP/NCAR reanalysis for the 1948-2012 periods, preserving the enhancements applied in the WIS effort. Storms prior to 1948 were developed from the NCEP 20th Century Reanalysis project. Matching pressure fields on both grids were sourced from reanalysis products and interpolated onto the WIS/NACCS grids. Each extratropical storm event produced by OWI contains 8 days of wind/pressure fields with the majority of the reanalysis effort concentrated on the coastal domain of the storm with high wind forcing.

In addition to the extratropical storm wind and pressure fields developed by OWI for the NACCS study, OWI provided developmental support and analysis associated with the generation of synthetic tropical storm wind and pressure fields. ERDC provided OWI with storm parameters associated with 1050 tropical synthetic events and OWI was responsible (with input from ERDC) to expand these landfall parameters into a full storm track time history for each event. The development of a track path both pre- and post-landfall followed the same basic methodology as was applied in OWI's contribution to the FEMA Region IV Georgia/North Florida Surge study. Storm speed remained constant for the storm duration by applying the landfall speed specification supplied by ERDC. Post-landfall, the storm heading was preserved for a suitable amount of time (usually 24 hours) to allow sufficient spin-down time for the response (surge and wave) models. Prior to landfall, an analysis of mean track paths for 3 regional stratifications supplied by ERDC was evaluated to recommend a suitable turning rate (by stratification, if needed) of storm heading so that synthetic track paths were consistent with the historical record. Generation of synthetic tropical storm wind and pressure fields from 3-5 days prior to landfall/closest approach to 1 day post-landfall was accomplished with a tropical PBL model. Wind (WIN) and pressure (PRE) output files of 10-meter wind and sea level pressures were made on two target grids. The same WIS Level II and NACCS domains described in the extratropical wind and pressure field development were applied with the synthetic tropical storms.

With the storms selected and wind and pressure fields generated, the next major step was to apply CSTORM-MS to each event because this system

provides a comprehensive methodology to simulate coastal storms and produce accurate surge and waves in the coastal zone. CSTORM-MS was applied with WAM for producing offshore deep water waves mainly intended for providing boundary conditions to the nearshore steady-state wave model STWAVE; ADCIRC to simulate the surge and circulation response to the storms; and STWAVE to provide the nearshore wave conditions including local wind generated waves. The CSTORM-MS coupling framework options used for the NACCS numerical modeling study tightly links the ADCIRC and STWAVE models in order to allow for dynamic interaction between surge and waves. Each model was validated separately prior to going into production mode.

An evaluation was conducted to assess the quality of the offshore wave model WAM estimates for several historical extratropical and tropical events. The testing also provided a means to evaluate the grid system, model resolutions, and forcing conditions. Validation was conducted by simulating five tropical and 17 extratropical storms based on high water level measurements and extreme wave dominated events and comparing to measured wave conditions for each event. The wave model results were evaluated at as many as thirty point-source measurements in the Atlantic Basin. The evaluation consisted of time, scatter, Quartile-Quartile graphics and a battery of statistical tests performed at each site for each grid level and for each of the twenty-two selected storm events. These results indicated that WAM provided high quality wave estimates compared to the measurement sites. From these tests the need to initiate the Level1 WAM historic storm simulations at a minimum of 10-days prior to the occurrence of the storm peak was also determined. This assured the near-shore wave climate contained sufficient far-field wave energy generated by synoptic-scale events in the entire Atlantic Ocean basin. The pre-production assessment also provided a means to develop and test the fully-automated system, generation of boundary condition information for STWAVE, and tools for quality checking the final model results used in the production portion of the work.

The ADCIRC mesh developed for the NACCS study encompasses the western North Atlantic, the Gulf of Mexico and the western extent of the Caribbean Sea with 3.1 million computational nodes and 6.2 million elements. Validation of this mesh was accomplished by comparisons of model simulated water levels to NOAA/NOS measured water-surface elevations. Model validation was conducted with the analysis of a long term tidal sim-

ulation as well as 5 tropical and 2 extratropical storm events. From the harmonic analysis conducted for the long-term simulation it was determined that the model accurately predicts response to tidal forcing. Model accuracy was tested for the 7 validation storm events and showed that the model agrees with measured water-surface elevations (time series and high water marks) at measurement locations throughout the study domain. Model accuracy is a function of the quality of the ADCIRC mesh, the accuracy of the bathymetry within the mesh, the representation of bottom friction characterized in the model, and the accuracy of the wind forcing. Small differences in modeled and measured water surface elevations for the validation storms are attributed to these factors.

Nearshore wave transformation for the NACCS was accomplished using the spectral wave model STWAVE applied to ten domains encompassing coastal Virginia to Maine. Prior to the production phase, STWAVE results were evaluated against measurements for the same 5 tropical and 2 extratropical storms used in the evaluation of ADCIRC. The evaluation consisted of time, scatter, Taylor diagrams, and a suite of statistics. Comparisons were most favorable for the most recent storms, likely due to development of more accurate wind and offshore forcing, more advanced buoy technology, and a larger measurement population size in recent time. STWAVE was also more accurate in estimating wave height than mean wave period. Although some sites did demonstrate persistent poor performance, STWAVE provided overall good wave estimates compared to measurement sites given the large extent and complexity of the model region.

Once the models were validated, NACCS production began on the suite of 1150 storms for three conditions. With the 3450 CSTORM-MS simulation requirement, a semi-automated process was needed to efficiently and accurately set up and execute this large simulation suite. Therefore, semi-automated production scripts for setting up CSTORM-MS simulations (CSTORM-PS) were created, tested, and verified for historical extratropical storms, historical tropical storms, and synthetic tropical storms and were executed for all production simulations. Because of the magnitude of this study, a visualization component (CSTORM-PVz) was created within the CSTORM-MS framework and automation scripts were generated to produce graphics, descriptive statistics, and digital reports for all NACCS results.

The products of this detailed, large-domain modeling study are intended to close gaps in data required for flood risk management analyses by providing statistical wave and water level information for the entire North Atlantic coast, while providing cost savings compared to developing coastal storm hazard data for individual local projects. The CSTORM-MS platform provides the raw model data (winds, waves, and water levels) as well as processed data (visualization products and statistics) and is available through the internet-based CHS. These data are available for engineering analyses and project design for coastal projects from Maine to Virginia.

## 10 References

- Adams, J.C., W.S. Brainerd, J.T. Martin, B.T. Smith, and J.L. Wagener. (1992) *FORTTRAN 90 Handbook: Complete ANSI/ISO Reference*. Intertext Publications McGraw-Hill Book Company, New York, NY.
- ADCIRC (2014) User's Manual. <<http://adcirc.org>>.
- Bender, C., J.M. Smith, A. Kennedy, and R. Jensen. (2013). STWAVE simulation of Hurricane Ike: Model results and comparison to data. *Coastal Engineering*, 73, 58-70.
- Bunya, S., J. Westerink, J.C. Dietrich, H.J. Westerink, L.G. Westerink, J. Atkinson, B. Ebersole, J.M. Smith, D. Resio, R. Jensen, M.A. Cialone, R. Luettich, C. Dawson, H.J. Roberts, and J. Ratcliff. (2010). A high-resolution coupled riverine flow, tide, wind, wind wave and storm surge model for Southern Louisiana and Mississippi: Part I-Model development and validation. *Monthly Weather Review*, 138, 345-377.
- Cardone, V.J., C.V. Greenwood, and J.A. Greenwood. (1992). Unified program for the specification of hurricane boundary layer winds over surfaces of specified roughness. *Contract Report CERC-92-1*. U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Cardone, V.J., and J.A. Greenwood. (1993). *Final Report: Development and Initial Test Against SWADE of an Interactive Objective Kinematic Analysis Program for Marine Surface Wind Field Analysis*. Submitted to U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Cardone, V.J., R. E. Jensen, D. T. Resio, V. R. Swail, and A. T. Cox. (1996). Evaluation of contemporary ocean wave models in rare extreme events: the "Halloween Storm" of October 1991 and the "Storm of the Century" of March 1993. *Journal of Atmospheric and Oceanic Technology*, 13, 198-230.
- Cox, A., Greenwood, Cardone, and Swail. (1995). An interactive objective kinetic analysis system. The 4th International Workshop on Wave Hindcasting and Forecasting, Banff, Alberta, Canada.
- Dietrich, J.C., J.J. Westerink, A.B. Kennedy, J.M. Smith, R. Jensen, M. Zijlema, L.H. Holthuijsen, C. Dawson, R.A. Luettich, Jr., M.D. Powell, V.J. Cardone, A.T. Cox, G.W. Stone, H. Pourtaheri, M.E. Hope, S. Tanaka, L.G. Westerink, H.J. Westerink, Z. Cobell. (2011). Hurricane Gustav (2008) waves, storm surge and currents: Hindcast and synoptic analysis in Southern Louisiana. *Monthly Weather Review*, 139, 2488-2522.
- Dietrich, J.C., S. Bunya, J.J. Westerink, B.A. Ebersole, J.M. Smith, J.H. Atkinson, R. Jensen, D.T. Resio, R.A. Luettich, C. Dawson, V.J. Cardone, A.T. Cox, M.D. Powell, H.J. Westerink, and H.J. Roberts. (2010). A high-resolution coupled riverine flow, tide, wind, wind wave and storm surge model for Southern Louisiana and Mississippi: Part II-Synoptic description and analysis of Hurricanes Katrina and Rita. *Monthly Weather Review*, 138, 378-404.

- FEMA. (2012). *Operating Guidance No. 8-12 for use by FEMA staff and Flood Mapping Partners: Joint Probability – Optimal Sampling Method for Tropical Storm Surge*. Federal Emergency Management Agency, U.S. Department of Homeland Security, Washington DC.
- Flather, R. A. (1988). A numerical model investigation of tides and diurnal-period continental shelf waves along Vancouver Island. *Journal of Physical Oceanography*, 18, 115-139.
- Garratt, J. R. (1977). Review of drag coefficients over oceans and continents. *Monthly Weather Review*, 105, 915-929.
- Hagen, S. C., J.J. Westerink, R.L. Kolar, and O. Horstmann. (2001). Two-dimensional, unstructured mesh generation for tidal models. *International Journal for Numerical Methods in Fluids*, 35, 669-686.
- Hasselmann, K., T.P. Barnett, E. Bouws, H. Carlson, D.E. Cartwright, K. Enke, J.A. Ewing, H. Gienapp, D.E. Hasselmann, P. Kruseman, A. Meerburg, P. Muller, D.J. Olbers, K. Richter, W. Sell, and H. Walden. (1973). Measurement of wind-wave growth and swell decay during the Joint North Sea Wave Project (JONSWAP). *Deutsches Hydrographisches Institut Suppl. A*, 8 (12), 1-95
- Hesser, T. J., M.A. Cialone, and M.E. Anderson. (2013). *Lake St. Clair: Storm wave and water level modeling*. ERDC/CHL TR-13-5. U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Ho, F.P., and V.A. Myers. (1975). *Joint Probability Method of Tide Frequency Analysis applied to Apalachicola Bay and St. George Sound, Florida*. NOAA Technical Report NWS 18, 43p.
- Holland, G.J. (1980). An analytic model of the wind and pressure profiles in hurricanes. *Monthly Weather Review*, 108 (8), 1212-1218.
- Holthuijsen, L.H. 2007. *Waves in Ocean and Coastal Waters*. Cambridge University Press, United Kingdom. 404 pp.
- Hope, M.E., J.J. Westerink, A.B. Kennedy, P.C. Kerr, J.C. Dietrich, C. Dawson, C. Bender, J.M. Smith, R.E. Jensen, M. Zijlema, L.H. Holthuijsen, R.A. Luettich, M.D. Powell, V.J. Cardone, A.T. Cox, H. Pourtaheri, H.J. Roberts, J.H. Atkinson, S. Tanaka, H.J. Westerink, and L.G. Westerink. (2013). Hindcast and validation of Hurricane Ike (2008) waves, forerunner, and storm surge. *Journal of Geophysical Research*, 118 (9), 4424-4460.
- IPET. 2009. *Performance Evaluation of the New Orleans and Southeast Louisiana Hurricane Protection System*. Final Report of the Interagency Performance Evaluation Task Force. Department of the Army, U.S. Army Corps of Engineers, Washington, DC.
- Irish, J.L., Williams, B.P., Militello, A., Mark, D.J., 2005. Regional-scale storm-surge modeling of Long Island, New York, USA. 29th International Conference on Coastal Engineering, Lisbon, Portugal, pp. 1565–1577.

- Jensen, R.E., M.A. Cialone, R.S. Chapman, B.A. Ebersole, M.E. Anderson, and L. Thomas (2012). *Lake Michigan: Storm wave and water level modeling*. ERDC/CHL TR-12-26. U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Jonsson, I. G. 1990. Wave-current interactions. *The Sea*. Chapter 3, Vol. 9, Part A, B. LeMehaute and D. M. Hanes, ed. John Wiley & Sons, Inc., New York.
- Kolar, R. L., W.G. Gray, J.J. Westerink, and R.A. Luettich. (1994). Shallow water modeling in spherical coordinates: Equation formulation, numerical implementation, and application. *Journal of Hydraulic Research*, 32 (1), 3-24.
- Komen, G.J. L. Cavaleri, M. Donelan, K. Hasselmann, S. Hasselmann, and P.A.E.M. Janssen, (1994). Dynamics and modeling of ocean waves. Cambridge University Press, United Kingdom. 532 pp.
- LeProvost, C., and A. Poncet. (1987). Finite element method for spectral modelling of tides. *International Journal for Numerical Methods in Engineering*, 12, 853-871.
- Luettich, R. A., Jr., J.J. Westerink, N.W. Scheffner, N. W. (1992). *ADCIRC: An advanced three-dimensional circulation model for shelves, coasts, and estuaries*. Technical Report DRP-92-6, U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Massey, T.C., T.V. Wamsley, and M.A. Cialone. (2011) Coastal Storm Modeling – System Integration. *Proceedings of the 2011 Solutions to Coastal Disasters Conference*, Anchorage, Alaska, 99-108.
- Massey, T.C., M.E. Anderson, J.M. Smith, J. Gomez, and R. Jones. (2011). *STWAVE: Steady-state Spectral Wave Model User's Manual for STWAVE, Version 6.0*. ERDC/CHL SR-11-1. U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Mei, C.C. (1989). *The Applied Dynamics of Ocean Surface Waves*. Singapore: World Scientific Publishing. 768 pp.
- Message Passing Interface (MPI). (2014).  
<<http://www.mcs.anl.gov/research/projects/mpi/index.htm>>.
- Miche, M. (1951). Le pouvoir reflechissant des ouvrages maritimes exposes a l'action de la houle. *Annals des Ponts et Chaussées* 121e Annee, 285-319 (translated by Lincoln and Chevron, University of California, Berkeley, Wave Research Laboratory, Series 3, Issue 363, June 1954).
- Nadal-Caraballo, N.C., J.A. Melby, and B.A. Ebersole. (2012). *Statistical analysis and storm sampling approach for Lakes Michigan and St. Clair*. ERDC/CHL TR-12-19. . U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Nadal-Caraballo, N.C., and J.A. Melby. (2014). *North Atlantic Coast Comprehensive Study – Phase I: Statistical Analysis of Historical Extreme Water Levels with Sea Level Change*. ERDC/CHL TR-14-7. U.S. Army Engineer Research and Development Center, Vicksburg, MS.

- Nadal-Caraballo, N.C., J.A. Melby, V.M. Gonzalez, and A.T. Cox. (2015). *North Atlantic Coast Comprehensive Study – Coastal Storm Hazards from Virginia to Maine*. In progress. Technical Report. U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Oceanweather, Inc. (2014). *Development of Wind and Pressure Forcing for the North Atlantic Coast Comprehensive Study (NACCS)*. Submitted to U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Padilla-Hernandez, R. and J. Monbaliu. (2001). Energy balance of wind-waves as a function of the bottom friction formulation. *Coastal Engineering*, 43, 131-148.
- Phillips, O.M. (1957). On the generation of waves by turbulent wind. *Journal of Fluid Mechanics*, 2, 417-465.
- Pierson, W.J. and L. Moskowitz. (1964). A proposed spectral form for fully developed wind seas based on the similarity theory of S.A. Kitaigorodskii. *Journal of Geophysical Research*, 69, 5181-5190.
- Resio, D.T. (1987). Shallow-water waves. I: Theory. *Journal of Waterway, Port, Coastal, and Ocean Engineering*, 113 (3), 264-281.
- Resio, D.T. (1988). Shallow-water waves. II: Data comparisons. *Journal of Waterway, Port, Coastal, and Ocean Engineering*, 114 (1), 50-65.
- Resio, D.T. and W. Perrie. (1989). Implications of an  $f^4$  equilibrium range for wind-generated waves. *Journal of Physical Oceanography*, 19, 193-204.
- Resio, D.T., V.R. Swail, R.E. Jensen, and V.J. Cardone, (1999). Wind speed scaling in fully developed seas, *Journal of Atmospheric and Oceanic Technology*, 29, 1801-1811.
- Resio, D.T., S.J. Boc, L. Borgman, V. Cardone, A.T. Cox, W.R. Dally, R.G. Dean, D. Divoky, E. Hirsh, J.L. Irish, D. Levinson, A. Niedoroda, M.D. Powell, J.J. Ratcliff, V. Stutts, J. Suhada, G.R. Toro, and P.J. Vickery. (2007). *White Paper on Estimating Hurricane Inundation Probabilities*. Consulting Report prepared by USACE for FEMA.
- Schwab, D. (1980). Simulation and forecasting of Lake Erie storm surges. *Monthly Weather Review*, 106 (12), 453-460
- Smith, J.M. and C.L. Vincent, (1992). Shoaling and decay of two wave trains on beach, *Journal of Waterway, Port, Coastal, and Ocean Engineering*, 10 (106), 517-533.
- Smith, J.M., A.R. Sherlock, and D.T. Resio. (2001). *STWAVE: Steady-state Spectral Wave Model User's Manual for STWAVE, Version 3.0*. ERDC/CHL SR-01-1. U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Smith, J.M. (2007). *Full-plane STWAVE with Bottom Friction: II. Model Overview*. ERDC/CHL CHETN-I-75. U.S. Army Engineer Research and Development Center, Vicksburg, MS.

- SWAN Team (2014). SWAN scientific and technical documentation SWAN Cycle III version 41.01. Delft university of Technology, The Netherlands.  
<<http://swanmodel.sourceforge.net/>>.
- Taylor, K.E. (2001). Summarizing multiple aspects of model performance in a single diagram. *Journal of Geophysical Research*, 106, 7183-7192. (Also PCMDI Report 55, <http://www-pcmdi.llnl.gov/publications/ab55.html> )
- Thompson, E.F. (1980). *Energy spectra in shallow U.S. coastal waters*. Technical paper No. 80-2, Coastal Engineering Research Center, U.S. Army Corps of Engineers, Fort Belvoir, VA.
- Thompson, E. F. and V. J. Cardone. (1996). Practical modeling of hurricane surface wind fields. *Journal of Waterway, Port, Coastal, and Ocean Engineering*. 122(4), 195-205.
- Tolman, H. L. (2014). *User manual and system documentation of WAVEWATCH III version 4.18*. NOAA/NWS/NCEP/ MMAB Technical Note 316, 194 pp.+ Appendices.
- Toro, G.R., Resio, D.T., Divoky, D., Niedoroda, A.W., and Reed, C. (2010). Efficient joint-probability methods for hurricane surge frequency analysis. *Ocean Engineering* 37, 125-134.
- United States Army Corps of Engineers (USACE). (2006). *Louisiana Coastal Protection and Restoration (LACPR) Preliminary Technical Report*. Provided to United States Congress.
- Vickery, P.J. (2005). Simple empirical models for estimating the increase in the central pressure of tropical cyclones after landfall along the coastline of the United States. *Journal of Applied Meteorology*, 44, 1807-1826.
- Walsh, E.J., C. W. Wright, D. Vandemark, W.B. Krabill, A.W. Garcia, S.H. Houston, S.T. Murillo, M.D. Powell, P.G. Black and F.D. Marks Jr. (2002). Hurricane directional wave spectrum spatial variation at landfall. *Journal of Physical Oceanography*, 32, 1667-1684.
- Wamsley, T., B. W. Bunch, R. S. Chapman, M. B. Gravens, A. S. Grzegorzewski, B. D. Johnson, R. L. Permenter, and M. W. Tubman. (2011). *Mississippi Coastal Improvement Program, Barrier Island Restoration Numerical Modeling*. In progress. Technical Report. U.S. Army Engineer Research and Development Center, Vicksburg, MS.
- Westerink, J. J., R.A. Luettich Jr., A.M. Baptista, N.W. Scheffner, and P. Farrar. (1992). Tide and storm surge predictions using finite element model. *Journal of Hydraulic Engineering*, 118(10), 1373-1390.
- Westerink, J.J., R.A. Luettich Jr., J.C. Feyen, J.H. Atkinson, C. Dawson, H.J. Roberts, M.D. Powell, J.P. Dunion, E.J. Kubatko, and H. Portaheri. (2008). A basin- to channel-scale unstructured grid hurricane storm surge model applied to southern Louisiana. *Monthly Weather Review*, 136, 833–864.

Willmott C.J., S.G. Ackleson, R.E. Davis, J.J. Feddema, K.M. Klink, D.R. Legates, J. O'Donnell, C.M. Rowe. (1985). Statistics for the evaluation of model performance. *Journal of Geophysical Research*, 90(C5), 8995–9005.

## Appendix A: NACCS Historical Extratropical Cyclones

The following table shows the 100 historical extratropical cyclones that were identified for the NACCS study area. The “Total Number of Locations” column indicates the amount of NOAA gages where each storm was identified as a top-50 water level event. “Highest Rank” is the highest ranking achieved by each storm’s water level response at any one NOAA gage. For each storm, the “NOAA Station ID” indicates the gage where the highest response was observed, as well as the “NACCS Subregion” where each NOAA station is located.

Storm ID	yyyy	mm	dd	hh	Number of Water Level Stations	Region	Station ID	Rank	Water Level (m)
1	1938	1	25	13	2	3	8574680	11	1.03
2	1940	2	15	3	3	1	8443970	8	1.22
3	2010	2	6	9	4	3	8638863	17	0.97
4	1943	10	27	3	2	2	8518750	6	1.67
5	1945	11	30	8	3	1	8443970	3	1.46
6	1947	3	3	6	2	1	8443970	11	1.17
7	1950	11	25	21	4	2	8531680	1	2.50
8	1952	3	11	18	2	3	8574680	8	1.13
9	2000	12	17	21	2	3	8571892	17	0.86
10	1952	11	21	22	3	3	8594900	8	1.66
11	1953	11	7	10	4	2	8518750	10	1.40
12	1958	2	16	20	3	1	8443970	17	1.06
13	1960	2	19	7	4	1	8452660	15	0.93
14	1960	3	4	15	2	1	8443970	14	1.12
15	1961	2	4	10	4	2	8534720	10	1.12
16	1961	4	14	0	2	1	8443970	6	1.32
17	1962	3	7	6	6	3	8557380	1	1.77
18	1962	12	6	16	3	2	8534720	13	1.04
19	1964	1	13	18	4	2	8534720	9	1.12
20	1966	1	23	10	5	2	8536110	15	1.06
21	1966	1	30	16	3	2	8510560	16	1.04
22	1968	11	12	12	4	3	8557380	2	1.58
23	1970	12	17	14	4	2	8516945	16	1.66

Storm ID	yyyy	mm	dd	hh	Number of Water Level Stations	Region	Station ID	Rank	Water Level (m)
24	1971	3	4	16	2	1	8452660	9	1.02
25	1971	11	25	11	5	2	8531680	16	1.39
26	1972	2	4	6	3	1	8452660	11	1.00
27	1972	2	19	12	6	2	8534720	5	1.32
28	1972	11	9	2	3	2	8516945	9	1.82
29	1972	12	16	6	3	2	8510560	12	1.12
30	1973	1	29	14	2	1	8452660	14	0.94
31	1974	12	2	9	5	2	8531680	6	1.66
32	1976	2	2	10	3	1	8447930	9	0.97
33	1977	1	10	19	4	1	8447930	13	0.90
34	1977	10	14	19	2	2	8536110	14	1.06
35	1978	1	20	20	3	2	8510560	17	1.01
36	1978	1	26	18	5	3	8574680	7	1.16
37	1978	2	7	1	3	2	8510560	3	1.28
38	1978	4	26	23	2	3	8638610	7	1.23
39	1978	12	25	16	3	1	8413320	12	0.71
40	1979	1	21	23	8	1	8413320	7	0.81
41	1980	10	25	21	7	1	8454000	12	1.15
42	1982	10	25	10	2	3	8638863	4	1.22
43	1983	2	11	18	5	3	8638863	9	1.12
44	1983	3	19	6	6	3	8577330	7	0.79
45	1983	11	25	23	4	1	8413320	5	0.84
46	1983	12	12	21	4	3	8577330	10	0.70
47	1983	12	23	2	2	1	8410140	9	0.87
48	1983	12	29	3	3	1	8454000	7	1.29
49	1984	2	29	5	3	1	8413320	16	0.68
50	1984	3	29	21	4	1	8449130	3	1.03
51	1985	2	13	1	6	3	8574680	17	0.98
52	1985	11	5	7	6	3	8577330	1	1.04
53	1987	1	2	7	4	3	8557380	11	1.17
54	1987	1	23	6	9	1	8418150	3	1.05
55	1988	4	13	17	3	3	8638863	13	1.03
56	1988	11	2	12	3	1	8413320	9	0.79
57	1990	11	11	4	3	1	8413320	11	0.72
58	1991	10	30	20	9	1	8449130	1	1.41
59	1992	1	4	16	3	3	8577330	9	0.71
60	1992	12	11	22	4	2	8516945	2	2.26
61	1993	3	5	1	4	3	8571892	10	0.88
62	1993	3	14	0	6	2	8510560	2	1.29

Storm ID	yyyy	mm	dd	hh	Number of Water Level Stations	Region	Station ID	Rank	Water Level (m)
63	1993	11	28	15	5	3	8571892	4	0.98
64	1993	12	21	22	2	1	8413320	8	0.80
65	1994	1	4	13	5	2	8536110	7	1.11
66	1994	3	2	23	7	2	8531680	2	2.23
67	1994	12	24	12	4	2	8516945	4	2.00
68	1995	2	5	0	4	1	8418150	5	0.94
69	1995	11	15	3	4	2	8516945	10	1.73
70	1996	1	8	6	7	2	8536110	1	1.54
71	2003	10	15	16	2	1	8413320	17	0.68
72	1996	10	20	2	3	2	8516945	14	1.69
73	1996	12	8	11	3	1	8418150	9	0.83
74	1997	1	10	9	5	1	8454000	15	1.08
75	1997	4	19	12	2	1	8449130	9	0.95
76	1998	1	28	21	4	3	8638863	3	1.36
77	1998	2	5	1	8	3	8557380	3	1.53
78	2000	1	25	12	4	3	8638863	10	1.10
79	2001	3	7	10	3	1	8449130	11	0.93
80	2003	12	11	13	4	3	8577330	15	0.70
81	2003	12	18	5	4	1	8418150	10	0.83
82	2006	10	7	6	2	3	8638863	15	0.99
83	2006	10	28	19	6	1	8454000	11	1.16
84	2006	11	17	1	4	3	8575512	13	0.90
85	2006	11	22	17	2	3	8638863	6	1.15
86	2007	4	16	5	7	1	8454000	8	1.24
87	2008	5	12	4	6	3	8577330	5	0.87
88	2008	12	22	5	2	1	8410140	2	0.97
89	2009	11	13	2	5	3	8638863	1	1.57
90	2009	12	9	22	3	1	8418150	16	0.78
91	2009	12	19	18	5	3	8638863	11	1.09
92	2009	12	26	10	5	3	8577330	16	0.69
93	2010	2	26	4	7	1	8443970	1	1.84
94	2010	3	13	7	3	3	8594900	10	1.52
95	2010	10	1	4	2	3	8577330	14	0.70
96	2010	10	15	13	2	1	8418150	11	0.82
97	2010	12	27	6	6	1	8418150	14	0.80
98	2011	4	17	3	4	3	8571892	6	0.95
99	2012	12	21	12	6	3	8571892	3	1.09
100	2012	12	27	7	4	2	8516945	12	1.72

Substitute historical extratropical storms for OWI generation of wind and pressure fields.

Storm ID	yyy	mm	dd	hh	Number of Water Level Stations	Region	Station ID	Rank	Water Level (m)
101	2010	2	6	9	4	3	8638863	17	0.97
102	2000	12	17	21	2	3	8571892	17	0.86
103	2003	10	15	16	2	1	8413320	17	0.68
104	1960	12	12	8	2	3	8557380	18	1.09
105	1990	10	26	11	2	3	8638863	18	0.96
106	1988	10	22	17	3	1	8418150	18	0.76
107	1977	3	23	1	2	2	8516945	19	1.53
108	2011	1	12	18	3	1	8413320	19	0.67
109	1986	12	3	1	2	3	8577330	19	0.66
110	2008	2	14	0	2	1	8454000	20	1.02
111	1998	3	9	16	4	3	8574680	20	0.93
112	1942	12	2	8	2	1	8452660	20	0.90
113	1942	12	30	22	3	3	8575512	20	0.81
114	2010	1	25	20	5	3	8577330	20	0.65
115	1969	12	27	11	3	1	8443970	21	1.04
116	2011	3	11	1	5	3	8574680	21	0.92
117	1951	3	14	17	4	3	8575512	21	0.80
118	2005	4	3	0	3	3	8577330	21	0.65
119	2007	12	16	18	2	2	8516945	22	1.51
120	1961	2	26	3	3	3	8594900	22	1.18
121	1942	3	3	13	2	1	8461490	22	1.02
122	2009	3	2	10	3	2	8534720	22	0.96
123	1983	4	3	8	3	3	8571892	22	0.81
124	1982	4	7	0	2	1	8449130	22	0.81
125	1998	2	25	10	4	1	8410140	22	0.74

## Appendix B: Synthetic Tropical Cyclone Master Tracks

Following are the 130 master tracks developed for the NACCS synthetic tropical cyclones.

Master Track ID	NACCS Subregion	Heading Direction, $\theta$ (deg)	Reference Latitude (deg-North)	Reference Longitude (deg-West)
1	3	-60	34.05	74.18
2	3	-60	34.39	73.57
3	3	-60	34.89	73.30
4	3	-60	35.64	73.57
5	3	-60	36.22	73.48
6	3	-60	36.65	73.09
7	3	-60	37.08	72.71
8	3	-60	37.74	72.81
9	2	-60	38.06	72.19
10	2	-60	38.52	71.73
11	2	-60	39.07	71.50
12	2	-60	39.49	70.96
13	2	-60	39.71	69.97
14	2	-60	40.12	69.42
15	2	-60	40.19	68.12
16	1	-60	40.53	67.40
17	1	-60	41.49	68.00
18	1	-60	42.16	67.94
19	1	-60	42.66	67.48
20	1	-60	42.90	66.42
21	1	-60	43.21	65.53
22	1	-60	42.56	62.38
23	1	-60	43.02	61.82
24	1	-60	43.31	60.88
25	3	-40	33.64	74.75
26	3	-40	33.83	74.06
27	3	-40	34.67	74.08
28	3	-40	35.52	74.09
29	3	-40	36.03	73.75
30	3	-40	36.50	73.38
31	3	-40	37.52	73.59
32	2	-40	37.58	72.69
33	2	-40	38.12	72.30

Master Track ID	NACCS Subregion	Heading Direction, $\theta$ (deg)	Reference Latitude (deg-North)	Reference Longitude (deg-West)
34	2	-40	38.84	72.11
35	2	-40	38.97	71.29
36	2	-40	39.14	70.51
37	2	-40	39.60	70.05
38	2	-40	39.75	69.26
39	1	-40	39.89	68.44
40	1	-40	41.22	68.85
41	1	-40	41.79	68.43
42	1	-40	42.14	67.76
43	1	-40	42.30	66.88
44	1	-40	42.73	66.31
45	1	-40	42.89	65.42
46	1	-40	41.95	63.30
47	1	-40	42.33	62.67
48	1	-40	42.76	62.10
49	1	-40	42.98	61.28
50	3	-20	33.23	75.34
51	3	-20	33.64	74.82
52	3	-20	35.21	74.80
53	3	-20	35.80	74.36
54	3	-20	37.15	74.28
55	2	-20	37.26	73.55
56	2	-20	37.94	73.07
57	2	-20	38.50	72.55
58	2	-20	38.65	71.83
59	2	-20	38.84	71.14
60	2	-20	39.25	70.55
61	1	-20	39.51	69.88
62	1	-20	40.88	69.74
63	1	-20	41.57	69.23
64	1	-20	41.76	68.45
65	1	-20	42.34	67.86
66	1	-20	42.29	66.97
67	1	-20	42.51	66.22
68	1	-20	41.59	64.90
69	1	-20	41.58	64.03
70	1	-20	42.07	63.42
71	1	-20	42.33	62.67
72	3	0	32.45	76.88
73	3	0	33.11	76.10
74	3	0	35.62	75.44
75	3	0	36.79	74.78

Master Track ID	NACCS Subregion	Heading Direction, $\theta$ (deg)	Reference Latitude (deg-North)	Reference Longitude (deg-West)
76	2	0	37.80	74.05
77	2	0	38.43	73.31
78	2	0	38.59	72.57
79	2	0	39.06	71.84
80	2	0	39.29	71.10
81	1	0	41.33	70.30
82	1	0	41.63	69.48
83	1	0	41.90	68.66
84	1	0	42.31	67.85
85	1	0	42.52	67.04
86	1	0	42.11	66.22
87	1	0	41.23	65.41
88	1	0	41.82	64.60
89	1	0	42.22	63.78
90	1	20	45.00	70.55
91	1	20	45.00	69.60
92	1	20	45.00	68.66
93	1	20	45.00	67.71
94	1	20	45.00	66.76
95	1	20	45.00	65.82
96	1	20	45.00	64.87
97	1	20	45.00	63.93
98	2	20	41.50	74.08
99	2	20	41.50	73.25
100	2	20	41.50	72.43
101	2	20	41.50	71.60
102	2	20	41.50	70.78
103	2	20	41.50	69.95
104	2	20	41.50	69.13
105	2	20	41.50	68.30
106	2	20	41.50	67.47
107	3	20	39.00	75.37
108	3	20	39.00	74.65
109	3	20	39.00	73.94
110	3	20	39.00	73.22
111	3	20	39.00	72.51
112	3	20	39.00	71.79
113	1	40	45.00	68.33
114	1	40	45.00	67.17
115	1	40	45.00	66.01
116	1	40	45.00	64.85
117	1	40	45.00	63.69

Master Track ID	NACCS Subregion	Heading Direction, $\theta$ (deg)	Reference Latitude (deg-North)	Reference Longitude (deg-West)
118	1	40	45.00	62.53
119	2	40	41.50	72.55
120	2	40	41.50	71.54
121	2	40	41.50	70.53
122	2	40	41.50	69.51
123	2	40	41.50	68.50
124	2	40	41.50	67.49
125	3	40	39.00	74.90
126	3	40	39.00	74.03
127	3	40	39.00	73.15
128	3	40	39.00	72.27
129	3	40	39.00	71.40
130	3	40	39.00	70.52

## Appendix C: NACCS Synthetic Tropical Cyclones

Following is a list of the 1,050 synthetic tropical cyclones that were developed for the NACCS study area. Storm parameters assigned to each cyclone include: heading direction,  $\theta$ ; central pressure deficit,  $\Delta P$ ; radius of maximum winds RMW; and forward speed,  $V_f$ .

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_f$ (km/h)
1	3	1	-60	88	39	18
2	3	1	-60	78	108	29
3	3	1	-60	68	62	42
4	3	1	-60	58	47	32
5	3	1	-60	48	64	12
6	3	1	-60	38	72	19
7	3	1	-60	28	26	39
8	3	2	-60	88	114	25
9	3	2	-60	78	51	30
10	3	2	-60	68	26	31
11	3	2	-60	58	37	12
12	3	2	-60	48	77	44
13	3	2	-60	38	72	13
14	3	2	-60	28	39	39
15	3	3	-60	88	105	24
16	3	3	-60	78	50	30
17	3	3	-60	68	39	12
18	3	3	-60	58	26	29
19	3	3	-60	48	82	44
20	3	3	-60	38	68	15
21	3	3	-60	28	42	40
22	3	4	-60	88	50	40
23	3	4	-60	78	51	29
24	3	4	-60	68	107	26
25	3	4	-60	58	65	12
26	3	4	-60	48	28	34
27	3	4	-60	38	37	13
28	3	4	-60	28	75	38
29	3	5	-60	88	77	37
30	3	5	-60	78	35	26
31	3	5	-60	68	62	12

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
32	3	5	-60	58	109	25
33	3	5	-60	48	49	25
34	3	5	-60	38	58	40
35	3	5	-60	28	25	35
36	3	6	-60	88	72	31
37	3	6	-60	78	38	27
38	3	6	-60	68	53	35
39	3	6	-60	58	105	28
40	3	6	-60	48	64	14
41	3	6	-60	38	25	28
42	3	6	-60	28	61	46
43	3	7	-60	88	50	37
44	3	7	-60	78	78	12
45	3	7	-60	68	104	35
46	3	7	-60	58	41	12
47	3	7	-60	48	25	31
48	3	7	-60	38	48	20
49	3	7	-60	28	71	33
50	3	8	-60	88	47	18
51	3	8	-60	78	75	40
52	3	8	-60	68	104	21
53	3	8	-60	58	41	39
54	3	8	-60	48	67	36
55	3	8	-60	38	25	19
56	3	8	-60	28	58	13
57	3	25	-40	88	53	20
58	3	25	-40	78	105	21
59	3	25	-40	68	29	22
60	3	25	-40	58	73	41
61	3	25	-40	48	51	40
62	3	25	-40	38	38	36
63	3	25	-40	28	65	12
64	3	26	-40	88	54	30
65	3	26	-40	78	104	30
66	3	26	-40	68	37	12
67	3	26	-40	58	29	38
68	3	26	-40	48	80	13
69	3	26	-40	38	63	47
70	3	26	-40	28	50	23
71	3	27	-40	88	44	24
72	3	27	-40	78	66	45
73	3	27	-40	68	117	25

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
74	3	27	-40	58	52	17
75	3	27	-40	48	26	20
76	3	27	-40	38	39	41
77	3	27	-40	28	74	23
78	3	28	-40	88	69	43
79	3	28	-40	78	53	16
80	3	28	-40	68	37	42
81	3	28	-40	58	103	23
82	3	28	-40	48	29	19
83	3	28	-40	38	62	38
84	3	28	-40	28	60	25
85	3	29	-40	88	53	35
86	3	29	-40	78	79	22
87	3	29	-40	68	32	22
88	3	29	-40	58	105	28
89	3	29	-40	48	55	12
90	3	29	-40	38	31	47
91	3	29	-40	28	59	39
92	3	30	-40	88	53	21
93	3	30	-40	78	42	22
94	3	30	-40	68	115	40
95	3	30	-40	58	25	33
96	3	30	-40	48	83	24
97	3	30	-40	38	50	45
98	3	30	-40	28	46	13
99	3	31	-40	88	65	16
100	3	31	-40	78	54	44
101	3	31	-40	68	104	31
102	3	31	-40	58	44	17
103	3	31	-40	48	27	32
104	3	31	-40	38	46	25
105	3	31	-40	28	74	21
106	3	50	-20	98	66	38
107	3	50	-20	88	76	12
108	3	50	-20	78	42	21
109	3	50	-20	68	113	32
110	3	50	-20	58	25	23
111	3	50	-20	48	37	49
112	3	50	-20	38	62	30
113	3	51	-20	98	48	26
114	3	51	-20	88	117	29
115	3	51	-20	78	68	42

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
116	3	51	-20	68	47	24
117	3	51	-20	58	72	12
118	3	51	-20	48	33	41
119	3	51	-20	38	31	12
120	3	52	-20	98	63	28
121	3	52	-20	88	38	22
122	3	52	-20	78	115	26
123	3	52	-20	68	70	38
124	3	52	-20	58	25	25
125	3	52	-20	48	44	43
126	3	52	-20	38	63	12
127	3	53	-20	98	59	19
128	3	53	-20	88	116	33
129	3	53	-20	78	27	36
130	3	53	-20	68	37	20
131	3	53	-20	58	56	46
132	3	53	-20	48	75	21
133	3	53	-20	38	45	20
134	3	54	-20	98	49	33
135	3	54	-20	88	100	17
136	3	54	-20	78	87	44
137	3	54	-20	68	28	20
138	3	54	-20	58	50	12
139	3	54	-20	48	65	27
140	3	54	-20	38	38	46
141	3	72	0	88	42	31
142	3	72	0	83	53	12
143	3	72	0	78	77	35
144	3	72	0	73	133	26
145	3	72	0	68	40	16
146	3	72	0	63	26	13
147	3	72	0	58	29	38
148	3	72	0	53	55	21
149	3	72	0	48	51	48
150	3	72	0	43	71	15
151	3	72	0	38	59	39
152	3	72	0	33	98	35
153	3	72	0	28	33	20
154	3	73	0	88	53	27
155	3	73	0	83	39	12
156	3	73	0	78	145	20
157	3	73	0	73	49	46

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
158	3	73	0	68	79	29
159	3	73	0	63	27	28
160	3	73	0	58	42	12
161	3	73	0	53	87	12
162	3	73	0	48	76	42
163	3	73	0	43	39	33
164	3	73	0	38	25	13
165	3	73	0	33	50	12
166	3	73	0	28	83	24
167	3	74	0	88	93	28
168	3	74	0	83	59	31
169	3	74	0	78	41	31
170	3	74	0	73	64	12
171	3	74	0	68	40	16
172	3	74	0	63	25	25
173	3	74	0	58	69	47
174	3	74	0	53	114	25
175	3	74	0	48	78	21
176	3	74	0	43	45	36
177	3	74	0	38	67	26
178	3	74	0	33	25	53
179	3	74	0	28	53	16
180	3	75	0	88	51	24
181	3	75	0	83	29	38
182	3	75	0	78	140	32
183	3	75	0	73	64	25
184	3	75	0	68	59	51
185	3	75	0	63	73	12
186	3	75	0	58	38	14
187	3	75	0	53	42	40
188	3	75	0	48	25	25
189	3	75	0	43	52	22
190	3	75	0	38	92	32
191	3	75	0	33	71	21
192	3	75	0	28	39	36
193	3	107	20	88	63	29
194	3	107	20	83	33	26
195	3	107	20	78	140	29
196	3	107	20	73	71	49
197	3	107	20	68	60	12
198	3	107	20	63	56	12
199	3	107	20	58	73	28

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
200	3	107	20	53	31	46
201	3	107	20	48	35	48
202	3	107	20	43	88	21
203	3	107	20	38	25	17
204	3	107	20	33	41	22
205	3	107	20	28	59	35
206	3	108	20	88	59	33
207	3	108	20	83	104	35
208	3	108	20	78	46	24
209	3	108	20	73	53	12
210	3	108	20	68	31	29
211	3	108	20	63	47	37
212	3	108	20	58	142	13
213	3	108	20	53	69	17
214	3	108	20	48	43	59
215	3	108	20	43	27	12
216	3	108	20	38	73	34
217	3	108	20	33	25	27
218	3	108	20	28	55	33
219	3	109	20	88	40	27
220	3	109	20	83	75	18
221	3	109	20	78	106	50
222	3	109	20	73	63	36
223	3	109	20	68	135	21
224	3	109	20	63	25	38
225	3	109	20	58	48	12
226	3	109	20	53	54	27
227	3	109	20	48	38	45
228	3	109	20	43	34	33
229	3	109	20	38	79	34
230	3	109	20	33	31	12
231	3	109	20	28	40	29
232	3	110	20	88	54	15
233	3	110	20	83	140	18
234	3	110	20	78	66	25
235	3	110	20	73	56	44
236	3	110	20	68	79	19
237	3	110	20	63	29	18
238	3	110	20	58	33	44
239	3	110	20	53	33	19
240	3	110	20	48	51	33
241	3	110	20	43	100	35

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
242	3	110	20	38	25	34
243	3	110	20	33	74	12
244	3	110	20	28	46	29
245	3	111	20	88	44	18
246	3	111	20	83	104	19
247	3	111	20	78	25	42
248	3	111	20	73	95	36
249	3	111	20	68	55	19
250	3	111	20	63	71	23
251	3	111	20	58	86	52
252	3	111	20	53	49	45
253	3	111	20	48	67	12
254	3	111	20	43	25	12
255	3	111	20	38	41	29
256	3	111	20	33	32	29
257	3	111	20	28	71	27
258	3	112	20	88	67	23
259	3	112	20	83	85	16
260	3	112	20	78	44	16
261	3	112	20	73	62	49
262	3	112	20	68	44	38
263	3	112	20	63	137	33
264	3	112	20	58	28	31
265	3	112	20	53	27	26
266	3	112	20	48	47	28
267	3	112	20	43	79	27
268	3	112	20	38	60	12
269	3	112	20	33	38	49
270	3	112	20	28	45	19
271	3	125	40	98	76	28
272	3	125	40	93	51	23
273	3	125	40	88	68	46
274	3	125	40	83	89	20
275	3	125	40	78	139	30
276	3	125	40	73	26	20
277	3	125	40	68	55	12
278	3	125	40	63	41	28
279	3	125	40	58	35	35
280	3	125	40	53	25	34
281	3	125	40	48	61	35
282	3	125	40	43	79	21
283	3	125	40	38	47	27

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
284	3	126	40	98	92	33
285	3	126	40	93	45	35
286	3	126	40	88	34	27
287	3	126	40	83	125	23
288	3	126	40	78	62	26
289	3	126	40	73	61	30
290	3	126	40	68	74	15
291	3	126	40	63	25	31
292	3	126	40	58	25	31
293	3	126	40	53	83	44
294	3	126	40	48	42	59
295	3	126	40	43	35	12
296	3	126	40	38	63	47
297	3	127	40	98	68	20
298	3	127	40	93	132	22
299	3	127	40	88	55	37
300	3	127	40	83	50	12
301	3	127	40	78	40	50
302	3	127	40	73	30	27
303	3	127	40	68	98	31
304	3	127	40	63	60	17
305	3	127	40	58	90	21
306	3	127	40	53	34	13
307	3	127	40	48	43	12
308	3	127	40	43	38	21
309	3	127	40	38	26	40
310	3	128	40	98	92	40
311	3	128	40	93	44	27
312	3	128	40	88	60	42
313	3	128	40	83	75	18
314	3	128	40	78	67	39
315	3	128	40	73	126	30
316	3	128	40	68	62	12
317	3	128	40	63	30	39
318	3	128	40	58	26	42
319	3	128	40	53	58	51
320	3	128	40	48	25	15
321	3	128	40	43	39	17
322	3	128	40	38	73	26
323	3	129	40	98	61	27
324	3	129	40	93	71	46
325	3	129	40	88	121	22

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
326	3	129	40	83	46	22
327	3	129	40	78	25	34
328	3	129	40	73	70	15
329	3	129	40	68	50	54
330	3	129	40	63	42	12
331	3	129	40	58	48	38
332	3	129	40	53	27	16
333	3	129	40	48	88	34
334	3	129	40	43	64	33
335	3	129	40	38	57	12
336	3	130	40	98	104	12
337	3	130	40	93	87	31
338	3	130	40	88	46	12
339	3	130	40	83	40	25
340	3	130	40	78	61	36
341	3	130	40	73	79	12
342	3	130	40	68	28	35
343	3	130	40	63	103	31
344	3	130	40	58	56	19
345	3	130	40	53	42	33
346	3	130	40	48	45	57
347	3	130	40	43	53	32
348	3	130	40	38	26	14
349	2	9	-60	78	125	65
350	2	9	-60	68	52	26
351	2	9	-60	58	56	61
352	2	9	-60	48	57	25
353	2	9	-60	38	29	43
354	2	9	-60	28	93	37
355	2	10	-60	78	51	36
356	2	10	-60	68	127	55
357	2	10	-60	58	88	28
358	2	10	-60	48	67	64
359	2	10	-60	38	31	52
360	2	10	-60	28	47	25
361	2	11	-60	78	125	43
362	2	11	-60	68	61	26
363	2	11	-60	58	69	62
364	2	11	-60	48	39	53
365	2	11	-60	38	35	35
366	2	11	-60	28	82	39
367	2	12	-60	78	50	45

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
368	2	12	-60	68	139	48
369	2	12	-60	58	79	31
370	2	12	-60	48	75	67
371	2	12	-60	38	41	24
372	2	12	-60	28	34	64
373	2	13	-60	78	47	29
374	2	13	-60	68	77	56
375	2	13	-60	58	127	49
376	2	13	-60	48	56	61
377	2	13	-60	38	80	27
378	2	13	-60	28	30	52
379	2	14	-60	78	55	28
380	2	14	-60	68	126	42
381	2	14	-60	58	79	65
382	2	14	-60	48	48	58
383	2	14	-60	38	30	38
384	2	14	-60	28	76	32
385	2	15	-60	78	66	60
386	2	15	-60	68	44	30
387	2	15	-60	58	127	48
388	2	15	-60	48	81	23
389	2	15	-60	38	33	62
390	2	15	-60	28	65	50
391	2	32	-40	78	47	57
392	2	32	-40	68	130	42
393	2	32	-40	58	74	25
394	2	32	-40	48	26	45
395	2	32	-40	38	46	33
396	2	32	-40	28	76	59
397	2	33	-40	78	67	63
398	2	33	-40	68	126	45
399	2	33	-40	58	74	22
400	2	33	-40	48	44	38
401	2	33	-40	38	29	68
402	2	33	-40	28	78	50
403	2	34	-40	78	67	61
404	2	34	-40	68	42	32
405	2	34	-40	58	80	25
406	2	34	-40	48	127	50
407	2	34	-40	38	33	65
408	2	34	-40	28	63	50
409	2	35	-40	78	44	28

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
410	2	35	-40	68	64	60
411	2	35	-40	58	125	51
412	2	35	-40	48	67	55
413	2	35	-40	38	79	24
414	2	35	-40	28	33	58
415	2	36	-40	78	46	25
416	2	36	-40	68	62	62
417	2	36	-40	58	126	61
418	2	36	-40	48	94	30
419	2	36	-40	38	30	55
420	2	36	-40	28	59	41
421	2	37	-40	78	82	59
422	2	37	-40	68	61	24
423	2	37	-40	58	44	60
424	2	37	-40	48	128	36
425	2	37	-40	38	31	29
426	2	37	-40	28	70	48
427	2	38	-40	78	52	23
428	2	38	-40	68	126	40
429	2	38	-40	58	45	55
430	2	38	-40	48	81	69
431	2	38	-40	38	72	33
432	2	38	-40	28	26	34
433	2	55	-20	88	55	62
434	2	55	-20	78	82	27
435	2	55	-20	68	126	50
436	2	55	-20	58	28	52
437	2	55	-20	48	48	29
438	2	55	-20	38	76	57
439	2	56	-20	88	47	36
440	2	56	-20	78	130	42
441	2	56	-20	68	50	68
442	2	56	-20	58	73	23
443	2	56	-20	48	79	56
444	2	56	-20	38	36	44
445	2	57	-20	88	60	45
446	2	57	-20	78	129	43
447	2	57	-20	68	43	29
448	2	57	-20	58	75	63
449	2	57	-20	48	37	58
450	2	57	-20	38	72	28
451	2	58	-20	88	43	38

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
452	2	58	-20	78	82	29
453	2	58	-20	68	66	64
454	2	58	-20	58	128	52
455	2	58	-20	48	29	64
456	2	58	-20	38	51	32
457	2	59	-20	88	58	34
458	2	59	-20	78	50	35
459	2	59	-20	68	126	48
460	2	59	-20	58	68	66
461	2	59	-20	48	34	48
462	2	59	-20	38	80	29
463	2	60	-20	88	67	56
464	2	60	-20	78	126	41
465	2	60	-20	68	34	26
466	2	60	-20	58	66	22
467	2	60	-20	48	40	54
468	2	60	-20	38	78	57
469	2	76	0	78	74	38
470	2	76	0	73	89	79
471	2	76	0	68	112	14
472	2	76	0	63	35	36
473	2	76	0	58	62	50
474	2	76	0	53	25	54
475	2	76	0	48	58	47
476	2	76	0	43	42	66
477	2	76	0	38	126	47
478	2	76	0	33	52	19
479	2	76	0	28	71	60
480	2	77	0	78	58	75
481	2	77	0	73	61	32
482	2	77	0	68	143	30
483	2	77	0	63	36	33
484	2	77	0	58	97	59
485	2	77	0	53	60	29
486	2	77	0	48	49	58
487	2	77	0	43	98	39
488	2	77	0	38	25	56
489	2	77	0	33	61	54
490	2	77	0	28	60	18
491	2	78	0	78	117	38
492	2	78	0	73	73	62
493	2	78	0	68	42	43

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
494	2	78	0	63	76	21
495	2	78	0	58	56	68
496	2	78	0	53	25	30
497	2	78	0	48	45	29
498	2	78	0	43	80	50
499	2	78	0	38	132	45
500	2	78	0	33	39	66
501	2	78	0	28	61	40
502	2	79	0	78	82	47
503	2	79	0	73	46	42
504	2	79	0	68	96	68
505	2	79	0	63	74	18
506	2	79	0	58	130	32
507	2	79	0	53	33	14
508	2	79	0	48	94	45
509	2	79	0	43	28	55
510	2	79	0	38	64	38
511	2	79	0	33	58	66
512	2	79	0	28	46	39
513	2	80	0	78	71	26
514	2	80	0	73	76	56
515	2	80	0	68	140	50
516	2	80	0	63	44	44
517	2	80	0	58	52	88
518	2	80	0	53	25	56
519	2	80	0	48	51	50
520	2	80	0	43	83	69
521	2	80	0	38	37	14
522	2	80	0	33	99	35
523	2	80	0	28	62	38
524	2	98	20	78	73	38
525	2	98	20	73	86	82
526	2	98	20	68	83	32
527	2	98	20	63	50	55
528	2	98	20	58	37	34
529	2	98	20	53	137	39
530	2	98	20	48	59	22
531	2	98	20	43	28	49
532	2	98	20	38	92	51
533	2	98	20	33	59	58
534	2	98	20	28	45	35
535	2	99	20	78	41	33

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
536	2	99	20	73	69	61
537	2	99	20	68	108	22
538	2	99	20	63	145	50
539	2	99	20	58	26	50
540	2	99	20	53	70	17
541	2	99	20	48	58	39
542	2	99	20	43	41	77
543	2	99	20	38	50	47
544	2	99	20	33	41	39
545	2	99	20	28	100	49
546	2	100	20	78	70	34
547	2	100	20	73	36	60
548	2	100	20	68	144	52
549	2	100	20	63	73	22
550	2	100	20	58	70	56
551	2	100	20	53	44	39
552	2	100	20	48	60	60
553	2	100	20	43	25	41
554	2	100	20	38	103	42
555	2	100	20	33	50	74
556	2	100	20	28	61	23
557	2	101	20	78	77	32
558	2	101	20	73	62	65
559	2	101	20	68	33	42
560	2	101	20	63	138	49
561	2	101	20	58	62	27
562	2	101	20	53	93	58
563	2	101	20	48	101	23
564	2	101	20	43	42	14
565	2	101	20	38	48	46
566	2	101	20	33	61	48
567	2	101	20	28	33	84
568	2	102	20	78	60	44
569	2	102	20	73	96	33
570	2	102	20	68	57	73
571	2	102	20	63	145	43
572	2	102	20	58	32	55
573	2	102	20	53	31	24
574	2	102	20	48	90	51
575	2	102	20	43	35	39
576	2	102	20	38	85	14
577	2	102	20	33	57	46

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
578	2	102	20	28	57	46
579	2	103	20	78	44	34
580	2	103	20	73	78	33
581	2	103	20	68	139	65
582	2	103	20	63	65	61
583	2	103	20	58	111	29
584	2	103	20	53	30	49
585	2	103	20	48	58	29
586	2	103	20	43	50	53
587	2	103	20	38	42	60
588	2	103	20	33	41	14
589	2	103	20	28	95	51
590	2	104	20	78	68	57
591	2	104	20	73	141	37
592	2	104	20	68	58	26
593	2	104	20	63	32	55
594	2	104	20	58	79	44
595	2	104	20	53	33	43
596	2	104	20	48	39	14
597	2	104	20	43	83	17
598	2	104	20	38	54	50
599	2	104	20	33	55	60
600	2	104	20	28	100	54
601	2	105	20	78	68	48
602	2	105	20	73	128	60
603	2	105	20	68	67	22
604	2	105	20	63	66	56
605	2	105	20	58	62	78
606	2	105	20	53	56	24
607	2	105	20	48	32	53
608	2	105	20	43	38	28
609	2	105	20	38	62	63
610	2	105	20	33	100	37
611	2	105	20	28	52	47
612	2	106	20	78	118	25
613	2	106	20	73	61	51
614	2	106	20	68	36	28
615	2	106	20	63	58	36
616	2	106	20	58	74	29
617	2	106	20	53	50	59
618	2	106	20	48	93	57
619	2	106	20	43	126	34

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
620	2	106	20	38	27	62
621	2	106	20	33	57	27
622	2	106	20	28	51	62
623	2	119	40	88	66	31
624	2	119	40	83	94	43
625	2	119	40	78	76	60
626	2	119	40	73	46	45
627	2	119	40	68	45	88
628	2	119	40	63	129	56
629	2	119	40	58	98	29
630	2	119	40	53	29	50
631	2	119	40	48	46	14
632	2	119	40	43	66	53
633	2	119	40	38	52	34
634	2	120	40	88	69	39
635	2	120	40	83	137	57
636	2	120	40	78	47	14
637	2	120	40	73	64	79
638	2	120	40	68	60	45
639	2	120	40	63	33	29
640	2	120	40	58	34	56
641	2	120	40	53	102	41
642	2	120	40	48	54	41
643	2	120	40	43	72	17
644	2	120	40	38	64	67
645	2	121	40	88	105	33
646	2	121	40	83	67	59
647	2	121	40	78	46	36
648	2	121	40	73	50	53
649	2	121	40	68	33	76
650	2	121	40	63	126	38
651	2	121	40	58	68	21
652	2	121	40	53	28	31
653	2	121	40	48	85	49
654	2	121	40	43	88	69
655	2	121	40	38	54	54
656	2	122	40	88	146	44
657	2	122	40	83	54	27
658	2	122	40	78	63	71
659	2	122	40	73	67	36
660	2	122	40	68	87	14
661	2	122	40	63	25	28

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
662	2	122	40	58	63	44
663	2	122	40	53	43	29
664	2	122	40	48	115	44
665	2	122	40	43	32	59
666	2	122	40	38	68	45
667	2	123	40	88	75	58
668	2	123	40	83	48	35
669	2	123	40	78	136	40
670	2	123	40	73	37	73
671	2	123	40	68	92	33
672	2	123	40	63	27	34
673	2	123	40	58	54	47
674	2	123	40	53	76	28
675	2	123	40	48	105	58
676	2	123	40	43	53	52
677	2	123	40	38	40	14
678	2	124	40	88	158	62
679	2	124	40	83	46	51
680	2	124	40	78	62	49
681	2	124	40	73	51	16
682	2	124	40	68	90	17
683	2	124	40	63	70	45
684	2	124	40	58	62	80
685	2	124	40	53	29	71
686	2	124	40	48	27	34
687	2	124	40	43	105	56
688	2	124	40	38	51	46
689	1	16	-60	68	153	58
690	1	16	-60	58	51	36
691	1	16	-60	48	75	66
692	1	16	-60	38	95	35
693	1	16	-60	28	36	66
694	1	17	-60	68	53	48
695	1	17	-60	58	151	53
696	1	17	-60	48	89	33
697	1	17	-60	38	83	70
698	1	17	-60	28	28	51
699	1	18	-60	68	50	60
700	1	18	-60	58	154	46
701	1	18	-60	48	78	35
702	1	18	-60	38	92	68
703	1	18	-60	28	35	29

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
704	1	19	-60	68	69	66
705	1	19	-60	58	151	61
706	1	19	-60	48	98	37
707	1	19	-60	38	33	60
708	1	19	-60	28	53	34
709	1	20	-60	68	152	44
710	1	20	-60	58	52	60
711	1	20	-60	48	78	33
712	1	20	-60	38	92	67
713	1	20	-60	28	36	32
714	1	21	-60	68	79	61
715	1	21	-60	58	153	53
716	1	21	-60	48	48	37
717	1	21	-60	38	40	71
718	1	21	-60	28	91	28
719	1	22	-60	68	54	51
720	1	22	-60	58	154	49
721	1	22	-60	48	86	31
722	1	22	-60	38	88	68
723	1	22	-60	28	30	44
724	1	23	-60	68	50	61
725	1	23	-60	58	150	46
726	1	23	-60	48	79	36
727	1	23	-60	38	93	71
728	1	23	-60	28	38	28
729	1	24	-60	68	52	62
730	1	24	-60	58	150	42
731	1	24	-60	48	77	33
732	1	24	-60	38	96	67
733	1	24	-60	28	36	34
734	1	39	-40	68	51	49
735	1	39	-40	58	152	49
736	1	39	-40	48	86	31
737	1	39	-40	38	85	68
738	1	39	-40	28	26	50
739	1	40	-40	68	151	44
740	1	40	-40	58	77	35
741	1	40	-40	48	50	62
742	1	40	-40	38	37	30
743	1	40	-40	28	93	68
744	1	41	-40	68	54	64
745	1	41	-40	58	151	40

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
746	1	41	-40	48	70	29
747	1	41	-40	38	94	61
748	1	41	-40	28	35	40
749	1	42	-40	68	51	34
750	1	42	-40	58	151	59
751	1	42	-40	48	74	65
752	1	42	-40	38	96	34
753	1	42	-40	28	36	63
754	1	43	-40	68	51	37
755	1	43	-40	58	151	55
756	1	43	-40	48	78	64
757	1	43	-40	38	94	30
758	1	43	-40	28	37	67
759	1	44	-40	68	68	66
760	1	44	-40	58	152	65
761	1	44	-40	48	101	39
762	1	44	-40	38	54	32
763	1	44	-40	28	34	57
764	1	45	-40	68	51	65
765	1	45	-40	58	150	43
766	1	45	-40	48	76	36
767	1	45	-40	38	95	67
768	1	45	-40	28	37	34
769	1	46	-40	68	48	36
770	1	46	-40	58	151	55
771	1	46	-40	48	79	61
772	1	46	-40	38	42	71
773	1	46	-40	28	91	29
774	1	47	-40	68	52	65
775	1	47	-40	58	151	41
776	1	47	-40	48	71	30
777	1	47	-40	38	92	61
778	1	47	-40	28	36	41
779	1	48	-40	68	50	61
780	1	48	-40	58	153	45
781	1	48	-40	48	78	34
782	1	48	-40	38	91	67
783	1	48	-40	28	38	29
784	1	49	-40	68	48	60
785	1	49	-40	58	80	36
786	1	49	-40	48	151	47
787	1	49	-40	38	89	69

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
788	1	49	-40	28	40	29
789	1	61	-20	78	52	36
790	1	61	-20	68	76	66
791	1	61	-20	58	154	54
792	1	61	-20	48	93	33
793	1	61	-20	38	36	64
794	1	62	-20	78	49	37
795	1	62	-20	68	150	52
796	1	62	-20	58	79	65
797	1	62	-20	48	87	32
798	1	62	-20	38	40	66
799	1	63	-20	78	63	35
800	1	63	-20	68	103	57
801	1	63	-20	58	150	30
802	1	63	-20	48	58	72
803	1	63	-20	38	33	48
804	1	64	-20	78	52	64
805	1	64	-20	68	75	35
806	1	64	-20	58	151	41
807	1	64	-20	48	97	67
808	1	64	-20	38	37	35
809	1	65	-20	78	51	63
810	1	65	-20	68	150	45
811	1	65	-20	58	78	35
812	1	65	-20	48	92	69
813	1	65	-20	38	39	33
814	1	66	-20	78	51	36
815	1	66	-20	68	78	63
816	1	66	-20	58	152	55
817	1	66	-20	48	94	30
818	1	66	-20	38	37	67
819	1	67	-20	78	51	36
820	1	67	-20	68	79	66
821	1	67	-20	58	153	53
822	1	67	-20	48	37	66
823	1	67	-20	38	91	34
824	1	68	-20	78	59	69
825	1	68	-20	68	166	50
826	1	68	-20	58	34	49
827	1	68	-20	48	93	49
828	1	68	-20	38	58	29
829	1	69	-20	78	52	61

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
830	1	69	-20	68	151	43
831	1	69	-20	58	95	67
832	1	69	-20	48	36	32
833	1	69	-20	38	78	34
834	1	70	-20	78	49	60
835	1	70	-20	68	81	35
836	1	70	-20	58	150	48
837	1	70	-20	48	87	68
838	1	70	-20	38	42	32
839	1	71	-20	78	38	67
840	1	71	-20	68	156	55
841	1	71	-20	58	92	33
842	1	71	-20	48	77	65
843	1	71	-20	38	49	37
844	1	81	0	68	89	43
845	1	81	0	63	55	49
846	1	81	0	58	154	54
847	1	81	0	53	32	60
848	1	81	0	48	86	52
849	1	81	0	43	74	73
850	1	81	0	38	70	18
851	1	81	0	33	44	43
852	1	81	0	28	104	42
853	1	82	0	68	64	51
854	1	82	0	63	84	62
855	1	82	0	58	156	46
856	1	82	0	53	28	58
857	1	82	0	48	80	25
858	1	82	0	43	43	33
859	1	82	0	38	49	64
860	1	82	0	33	104	55
861	1	82	0	28	61	60
862	1	83	0	68	72	60
863	1	83	0	63	162	50
864	1	83	0	58	58	72
865	1	83	0	53	49	31
866	1	83	0	48	32	53
867	1	83	0	43	100	26
868	1	83	0	38	72	38
869	1	83	0	33	105	59
870	1	83	0	28	51	58
871	1	84	0	68	80	59

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
872	1	84	0	63	57	48
873	1	84	0	58	107	70
874	1	84	0	53	153	49
875	1	84	0	48	32	41
876	1	84	0	43	100	34
877	1	84	0	38	42	73
878	1	84	0	33	54	27
879	1	84	0	28	73	57
880	1	85	0	68	85	30
881	1	85	0	63	52	51
882	1	85	0	58	154	47
883	1	85	0	53	103	54
884	1	85	0	48	78	35
885	1	85	0	43	83	72
886	1	85	0	38	36	38
887	1	85	0	33	38	79
888	1	85	0	28	59	48
889	1	86	0	68	79	25
890	1	86	0	63	151	48
891	1	86	0	58	80	67
892	1	86	0	53	52	46
893	1	86	0	48	45	83
894	1	86	0	43	33	43
895	1	86	0	38	98	59
896	1	86	0	33	99	40
897	1	86	0	28	57	53
898	1	87	0	68	104	68
899	1	87	0	63	70	29
900	1	87	0	58	54	53
901	1	87	0	53	163	40
902	1	87	0	48	32	52
903	1	87	0	43	97	42
904	1	87	0	38	56	65
905	1	87	0	33	49	29
906	1	87	0	28	79	56
907	1	88	0	68	83	56
908	1	88	0	63	50	44
909	1	88	0	58	168	43
910	1	88	0	53	80	28
911	1	88	0	48	42	79
912	1	88	0	43	59	67
913	1	88	0	38	104	61

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
914	1	88	0	33	36	38
915	1	88	0	28	71	42
916	1	89	0	68	76	61
917	1	89	0	63	83	41
918	1	89	0	58	170	52
919	1	89	0	53	48	46
920	1	89	0	48	26	53
921	1	89	0	43	64	25
922	1	89	0	38	101	44
923	1	89	0	33	75	74
924	1	89	0	28	50	56
925	1	90	20	68	50	41
926	1	90	20	63	94	37
927	1	90	20	58	66	78
928	1	90	20	53	162	47
929	1	90	20	48	57	54
930	1	90	20	43	30	55
931	1	90	20	38	72	20
932	1	90	20	33	93	61
933	1	90	20	28	59	60
934	1	91	20	68	89	40
935	1	91	20	63	60	47
936	1	91	20	58	31	54
937	1	91	20	53	174	45
938	1	91	20	48	102	72
939	1	91	20	43	56	69
940	1	91	20	38	38	32
941	1	91	20	33	98	38
942	1	91	20	28	54	30
943	1	92	20	68	87	51
944	1	92	20	63	101	31
945	1	92	20	58	52	50
946	1	92	20	53	50	45
947	1	92	20	48	155	51
948	1	92	20	43	27	45
949	1	92	20	38	87	61
950	1	92	20	33	49	81
951	1	92	20	28	75	28
952	1	93	20	68	55	50
953	1	93	20	63	112	16
954	1	93	20	58	35	54
955	1	93	20	53	165	52

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
956	1	93	20	48	75	45
957	1	93	20	43	67	79
958	1	93	20	38	51	17
959	1	93	20	33	102	49
960	1	93	20	28	48	53
961	1	94	20	68	100	38
962	1	94	20	63	82	74
963	1	94	20	58	59	47
964	1	94	20	53	151	53
965	1	94	20	48	64	59
966	1	94	20	43	34	71
967	1	94	20	38	41	35
968	1	94	20	33	78	25
969	1	94	20	28	94	49
970	1	95	20	68	62	42
971	1	95	20	63	92	57
972	1	95	20	58	156	29
973	1	95	20	53	35	57
974	1	95	20	48	113	57
975	1	95	20	43	50	46
976	1	95	20	38	61	69
977	1	95	20	33	74	36
978	1	95	20	28	42	26
979	1	96	20	68	109	71
980	1	96	20	63	88	28
981	1	96	20	58	52	57
982	1	96	20	53	28	51
983	1	96	20	48	152	46
984	1	96	20	43	77	51
985	1	96	20	38	50	29
986	1	96	20	33	88	54
987	1	96	20	28	55	73
988	1	97	20	68	85	59
989	1	97	20	63	83	25
990	1	97	20	58	40	66
991	1	97	20	53	68	66
992	1	97	20	48	150	36
993	1	97	20	43	59	34
994	1	97	20	38	108	50
995	1	97	20	33	30	38
996	1	97	20	28	62	65
997	1	113	40	78	82	56

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
998	1	113	40	73	156	48
999	1	113	40	68	45	34
1000	1	113	40	63	82	23
1001	1	113	40	58	34	64
1002	1	113	40	53	69	83
1003	1	113	40	48	58	52
1004	1	113	40	43	113	52
1005	1	113	40	38	69	45
1006	1	114	40	78	117	64
1007	1	114	40	73	58	51
1008	1	114	40	68	73	19
1009	1	114	40	63	56	54
1010	1	114	40	58	152	39
1011	1	114	40	53	29	57
1012	1	114	40	48	40	29
1013	1	114	40	43	73	77
1014	1	114	40	38	87	43
1015	1	115	40	78	157	53
1016	1	115	40	73	55	23
1017	1	115	40	68	71	45
1018	1	115	40	63	51	73
1019	1	115	40	58	74	48
1020	1	115	40	53	96	75
1021	1	115	40	48	31	49
1022	1	115	40	43	113	36
1023	1	115	40	38	57	48
1024	1	116	40	78	65	47
1025	1	116	40	73	154	47
1026	1	116	40	68	39	67
1027	1	116	40	63	35	27
1028	1	116	40	58	100	26
1029	1	116	40	53	70	79
1030	1	116	40	48	104	58
1031	1	116	40	43	71	36
1032	1	116	40	38	53	45
1033	1	117	40	78	83	67
1034	1	117	40	73	88	27
1035	1	117	40	68	156	45
1036	1	117	40	63	45	52
1037	1	117	40	58	33	28
1038	1	117	40	53	73	44
1039	1	117	40	48	64	42

NACCS Synthetic Tropical Cyclone ID	NACCS Subregion	Master Track ID	$\theta$ (deg)	$\Delta P$ (hPa)	$R_{max}$ (km)	$V_r$ (km/h)
1040	1	117	40	43	53	81
1041	1	117	40	38	107	53
1042	1	118	40	78	174	43
1043	1	118	40	73	77	62
1044	1	118	40	68	58	66
1045	1	118	40	63	39	61
1046	1	118	40	58	74	32
1047	1	118	40	53	39	33
1048	1	118	40	48	69	32
1049	1	118	40	43	114	50
1050	1	118	40	38	59	57

## Appendix D: CSTORM-MS mf\_config.in Details

### service namelist

Note that all STWAVE simulations must start and end at the same time during the overall coupled simulation. A list and description of the variables in the “**service**” namelist in the CSTORM-MS coupler file (mf\_config.in) are given below.

Variable Name	Description													
wsid	Wave Coupling Service Identification Tag													
	<table> <tr> <th>Value</th><th>Coupling Type and Data to Share</th></tr> <tr> <td>1</td><td>Tight one-way coupling ADCIRC <math>\rightarrow</math> STWAVE (ADCIRC sends surge and wind to STWAVE)</td></tr> <tr> <td>2</td><td>Tight one-way coupling ADCIRC <math>\rightarrow</math> STWAVE (ADCIRC sends surge, wind, and currents to STWAVE)</td></tr> <tr> <td>3</td><td>Tight two-way coupling ADCIRC <math>\leftrightarrow</math> STWAVE (ADCIRC sends surge and wind, STWAVE sends non-zero wave radiation stress gradients)</td></tr> <tr> <td>4</td><td>Tight two-way coupling ADCIRC <math>\leftrightarrow</math> STWAVE (ADCIRC sends surge, currents, and wind, STWAVE sends non-zero wave radiation stress gradients)</td></tr> <tr> <td>5</td><td>Tight one-way coupling ADCIRC <math>\rightarrow</math> STWAVE (ADCIRC sends surge, wind and ice to STWAVE)</td></tr> <tr> <td>6</td><td>Tight two-way coupling ADCIRC <math>\leftrightarrow</math> STWAVE (ADCIRC sends surge, wind, and ice, STWAVE sends non-zero wave radiation stress gradients)</td></tr> </table>	Value	Coupling Type and Data to Share	1	Tight one-way coupling ADCIRC $\rightarrow$ STWAVE (ADCIRC sends surge and wind to STWAVE)	2	Tight one-way coupling ADCIRC $\rightarrow$ STWAVE (ADCIRC sends surge, wind, and currents to STWAVE)	3	Tight two-way coupling ADCIRC $\leftrightarrow$ STWAVE (ADCIRC sends surge and wind, STWAVE sends non-zero wave radiation stress gradients)	4	Tight two-way coupling ADCIRC $\leftrightarrow$ STWAVE (ADCIRC sends surge, currents, and wind, STWAVE sends non-zero wave radiation stress gradients)	5	Tight one-way coupling ADCIRC $\rightarrow$ STWAVE (ADCIRC sends surge, wind and ice to STWAVE)	6
Value	Coupling Type and Data to Share													
1	Tight one-way coupling ADCIRC $\rightarrow$ STWAVE (ADCIRC sends surge and wind to STWAVE)													
2	Tight one-way coupling ADCIRC $\rightarrow$ STWAVE (ADCIRC sends surge, wind, and currents to STWAVE)													
3	Tight two-way coupling ADCIRC $\leftrightarrow$ STWAVE (ADCIRC sends surge and wind, STWAVE sends non-zero wave radiation stress gradients)													
4	Tight two-way coupling ADCIRC $\leftrightarrow$ STWAVE (ADCIRC sends surge, currents, and wind, STWAVE sends non-zero wave radiation stress gradients)													
5	Tight one-way coupling ADCIRC $\rightarrow$ STWAVE (ADCIRC sends surge, wind and ice to STWAVE)													
6	Tight two-way coupling ADCIRC $\leftrightarrow$ STWAVE (ADCIRC sends surge, wind, and ice, STWAVE sends non-zero wave radiation stress gradients)													
stwgrids	The number of STWAVE grids in the application. A non-negative integer value.													
stwstart	An integer value that corresponds to the starting time for all the STWAVE simulations relative to the ADCIRC simulation start time. This value is the ADCIRC time step number for which the first STWAVE snap is to be computed, and can be calculated by taking the selected STWAVE start time in seconds and dividing by the ADCIRC time step size also given in seconds.													
stwfinish	An integer value that corresponds to the ending time for all the STWAVE simulations relative to the ADCIRC simulation start time. This value is the ADCIRC time step number when STWAVE calculations stop. It can be computed by taking the selected STWAVE end time in seconds and dividing by the ADCIRC time step size also given in seconds.													
stwtiminc	The number of ADCIRC time steps that occur between STWAVE snaps.													
geo_and_stpl_coord	A logical value of “.true.” or “.false.” True indicates that ADCIRC is in Geographic coordinates and STWAVE is either in State Plane or UTM coordinates. False indicates both ADCIRC and all STWAVE grids are in the same local (meters) coordinate system.													

### **adc\_def namelist**

A description of the "**adc\_def**" namelist contained in the CSTORM-MS coupler file (mf\_config.in) is given below.

Variable Name	Description
adcgrid	The file name of the ADCIRC mesh file (fort.14)
adcprocs	The number of compute processors to apply to ADCIRC. This is the same number used during the "adcprep" ADCIRC domain decomposition phase of the CSTORM-MS set up process.
writerprocs	The number of dedicated writer processors to use for ADCIRC. These are in addition to the compute processors (adcprocs).
adcstart	The time step number when the ADCIRC simulation starts.
adcfinish	The time step number when the ADCIRC simulation ends.

### **stw\_def namelist**

Only two variables are required in this namelist, the "simfile" and "stwprocs". All others variables are read from the STWAVE simulation file (\*.sim). However, "coord\_sys", "spzone", and "hemisphere" are not required in the \*.sim file so if they are not present in the \*.sim file they will be required in the mf\_config.in file. If these variables are supplied in both locations, the values given in the STWAVE \*.sim file will supercede those supplied in the mf\_config.in file. See below for a complete description of the variables contained in the "**stw\_def**" namelist contained in the CSTORM-MS coupler file (mf\_config.in).

Variable Name	Description
simfile	The file name of the STWAVE simulation file (*.sim)
stwprocs	The number of processors to use for a given STWAVE grid
coord_sys (optional)	"Local", "STATEPLANE", or "UTM" – Grid specification coordinate system
Spzone (optional)	A four (4) digit STATE PLANE zone code. Use the FIPS code or the two (2) digit UTM zone code.
hemisphere (optional)	"NORTH" or "SOUTH" – Used for UTM coordinates to distinguish between the grid being located in the northern or southern hemisphere.

## Sample mf\_config.in

A sample CSTORM-MS coupler control file (mf\_config.in) from synthetic tropical storm number 1050 using random tide sampling is given below. In this example a total of 2400 computer processors (CPU's) are applied to run the coupled simulation. One processor is the driver or "boss", 10 processors are used for couplers, one for each STWAVE domain. ADCIRC uses the remaining 2389 processors to perform computations. The total of all STWAVE processor applied to this simulation (sum of the individual 10 domains) is also 2389 CPU's. The coupled simulation starts by "hot starting" ADCIRC at time step number 2,091,600 to incorporate random tides. Waves start at time step number 2,174,400 and continuing every 1800 time steps (30 minutes in this case) until time step number 2,347,200.

```
#
# CSTORM-MS Input Parameters File
#   Compatible with CSTORM-MS Version 1.0.0
#
# Adcirc Grid
&adc_def adcgrid      = "NAC2014_P42_Rivers.grd",
          adcprocs     = 2389,
          writerprocs  = 0,
          adcstart     = 2091600,
          adcfinish    = 2347200
/
# Wave Service
&service wsid = 3,
          stwgrids    = 10,
          stwstart    = 2174400,
          stwfinish   = 2347200,
          stwtiminc   = 1800,
          geo_and_stpl_coord = .true.,
/
# Stwave Grid 1
&stw_def simfile = "NME.sim", stwprocs = 45,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 19 /
# Stwave Grid 2
&stw_def simfile = "CME.sim", stwprocs = 60,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 19 /
# Stwave Grid 3
&stw_def simfile = "SME.sim", stwprocs = 60,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 19 /
# Stwave Grid 4
&stw_def simfile = "EMA.sim", stwprocs = 72,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 19 /
# Stwave Grid 5
&stw_def simfile = "SMA.sim", stwprocs = 130,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 19 /
# Stwave Grid 6
&stw_def simfile = "LID.sim", stwprocs = 128,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 18 /
# Stwave Grid 7
&stw_def simfile = "NNJ.sim", stwprocs = 36,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 18 /
# Stwave Grid 8
&stw_def simfile = "CNJ.sim", stwprocs = 24,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 18 /
# Stwave Grid 9
&stw_def simfile = "CPB.sim", stwprocs = 1802,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 18 /
# Stwave Grid 10
&stw_def simfile = "WDC.sim", stwprocs = 32,
          coord_sys = "UTM", hemisphere = "NORTH", spzone = 18 /
```

## Appendix E: “Tar Ball” Details

For the NACCS numerical modeling study, there are 10 STWAVE domains applied in the CSTORM-MS simulations, each archived with two tar files: “Outputs” and “SurgeWind”. There are 4 ADCIRC tar files, 1 STWAVE station tar file, 1 CSTORM-MS tar file, plus 5 additional tar files resulting from the visualization process (indicated below by red text).

### ADCIRC

```
RNAME_ADCIRC_GBL_Hydro.tar -- fort.63.gz, fort.64.gz,
    *properties.log.gz
RNAME_ADCIRC_GBL_Met.tar -- fort.73.gz, fort.74.gz, rads.64.gz,
    *properties.log.gz
RNAME_ADCIRC_MaxMins.tar -- maxele.63.gz, maxvel.63.gz, max-
    wvel.63.gz, maxrs.63.gz, minpr.63.gz, *properties.log.gz
RNAME_ADCIRC_Stations.tar -- fort.61.gz, fort.62.gz, fort.71.gz,
    fort.72.gz, station locations (*stat.151.gz), *properties.log.gz
RNAME_Viz_ADCIRC_pngs.tar.gz – ADCIRC graphics (png files) from
    Viz
```

### STWAVE – per grid (GNAME)

```
RNAME_STWAVE_GNAME_Outputs.tar -- Waves.out.gz, TP.out.gz,
    break.out.gz, selh.out.gz, obse.out.gz, nest.out.gz, station.out.gz, sta-
    tion.in.gz, *properties.log.gz
RNAME_STWAVE_GNAME_SurgeWind.tar -- Wind.in.gz, Surge.in.gz,
    *properties.log.gz
RNAME_Viz_STWAVE_MaxMins.tar – Post-processed comma separat-
    ed ASCII files for the maximum wave height, period, peak period over
    all STWAVE snaps for each STWAVE grid.
RNAME_Viz_STWAVE_pngs.tar.gz – STWAVE graphics (png files) from
    Viz
```

### STWAVE – All Stations in One Tar File

```
RNAME_STWAVE_All_Stations.tar -- *station.in*, *station.out*,
    *properties.log.gz
```

**Run Info for CSTORM**

RNAME\_CSTORM\_Data.tar -- MF.log.gz, MF####, adcirc.log.gz,  
stwave.logs.gz, fort.15.gz, \*.sim.gz, mf\_config.in.gz, \*stat.151.gz,  
\*station.in.gz, submit\*, run\_\*, \*.sh, \*properties.log.gz

**Visualization**

RNAME\_Viz\_Data.tar – Visualization python scripts, run logs, etc.  
RNAME\_Viz\_VTK.tar – VTK files for the ADCIRC and STWAVE grids

**Report PDF File**

RNAME\_Report.pdf – Auto generated report containing graphics and  
statistics for the model simulation (ADCIRC and STWAVE)

## Appendix F: Model and CSTORM File Descriptions

### ADCIRC

Global Time Series Files: “Global” means that there is a value given for each finite element node in the ADCIRC mesh. These files can be very large in size.

- a. Fort.63 – the global time series file for sea surface elevations above and below the geoid. Stored in units of meters.
- b. Fort.64 – the global time series file for the depth-averaged water velocities. Stored in units of meters/sec.
- c. Fort.73 – the global time series file for the atmospheric pressure at sea level. Stored in units of meters of water.
- d. Fort.74 – the global time series file for wind velocities. Stored in units of meters/sec.
- e. Rads.64 – the global time series of the x- and y- components of surface gradient stress tensors.

Global Max/Min Files: These files contain the maximum or minimum value over the entire model simulation time stored at each node location. Max/Min is over time.

- a. Maxele.63 – maximum sea surface elevation. Stored in units of meters relative to the vertical datum of the ADCIRC mesh (fort.14, or \*.grd) file used.
- b. Maxvel.63 – maximum depth-integrated water velocity. Stored in units of meters/sec.
- c. Maxwvel.63 – maximum wind speed. Stored in units of meters/sec.
- d. Maxrs.63 – maximum magnitude of surface gradient stress tensor.
- e. Minpr.63 – minimum atmospheric pressure. Stored in units of (meters of water).

Station Files: These files contain time series data at selected point locations (stations).

- a. Fort.61 – station time series file for the sea surface elevations above and below the geoid as defined by the vertical datum of the ADCIRC mesh. Stored in units of meters.

- b. Fort.62 – station time series file for the depth-integrated water velocities (u-,v- components). Stored in units of meters/sec.
- c. Fort.71 – station time series file for atmospheric surface pressure. Stored in units of (meters of water).
- d. Fort.72 – station time series file for wind velocity (u- and v- components). Stored in units of meters/sec.
- e. Elev\_stat.151 – file that defines the x-,y- (longitude and latitude) locations of the elevation stations.
- f. Vel\_stat.151 -- file that defines the x-,y- (longitude and latitude) locations of the water current (velocity) stations.
- g. Met\_stat.151 -- file that defines the x-,y- (longitude and latitude) locations of the meteorological (winds and pressures) stations.

## STWAVE

### Global Time Series Output Files:

- a. Break.out – global time series file that contains the wave breaking indices information.
- b. Rads.out – global time series file that contains the x- and y- components of the gradients of surface stress tensor.
- c. Tp.out – global time series file that contains the peak wave period.
- d. Wave.out – global time series file that contains the significant wave height (meters), mean wave period (seconds) and mean wave direction (deg).

### Global Time Series Input Files:

- a. Surge.in – global time series file that contains the sea surface elevation adjustments. Units of meters.
- b. Wind.in – global time series file that contains the wind speed (meters/sec) and direction (deg).

### Local Time Series Output Files:

- a. Station.out – time series file that contains the following data at specified x/y locations within the STWAVE domain which are specified in either the STWAVE \*.sim file or in an external station location specification file (station.in):
  - 1) Snap IDD – Time stamp or snap identification
  - 2) X-location – station x-coordinate location (meters)
  - 3) Y-location – station y-coordinate location (meters)
  - 4) Significant Wave Height (meters)
  - 5) Mean Wave Period (seconds)

- 6) Mean Wave Direction (deg)
  - 7) Peak Wave Period (seconds)
  - 8) Wind Magnitude (meters/second)
  - 9) Wind Direction (deg)
  - 10) Water Elevation (meters)
- b. Selh.out – select height file that contains the following data at specified STWAVE i/j cell locations which are specified in the STWAVE \*.sim file in the select point data section:
    - 1) Snap IDD – Time stamp or snap identification
    - 2) I-cell – STWAVE i-cell number
    - 3) J-cell – STWAVE j-cell number
    - 4) Significant Wave Height (meters)
    - 5) Mean Wave Period (seconds)
    - 6) Mean Wave Direction (deg)
  - c. Obse.out – time series file that contains the spectral energy values at the same STWAVE i/j cell locations contained in the selh.out file.
  - d. Nest.out – time series file that contains the spectral energy values at specified Nesting point locations (i/j cell locations). These locations are specified in the STWAVE sim file in the Nest Point Data section.

**External Station Location Specification Files:** Instead of a separate file, this information can also be stored in the STWAVE \*.sim file in the Station Locations Data section.

- a. Station.in – File that contains the x- and y- locations of output stations where the output data will be stored in station.out. The coordinate values are in the same local coordinate system as specified in the STWAVE \*.sim file.

## **CSTORM Data**

### **STWAVE Run Log Files:**

- a. Log.out.0000 – For a full-plane STWAVE simulation, this file contains the convergence data for every iteration performed during the solution process and is useful for debugging purposes. For the half-plane version it contains the summary information for each snap showing the average wave height over the entire grid.
- b. Log.out.cmpct.0000 – Only produced by the full plane version of STWAVE and contains a summary of the snap solution iteration and average wave height over the entire grid for that snap.

### **ADCIRC Run Log File:**

- a. Adcirc.log – contains summary data at a specified time step interval that shows the maximum water surface elevation and water current velocity as well as information about wind data being read in, etc.

#### CSTORM Run Log Files:

- a. MF.log – CSTORM coupler log file that shows the number of ADCIRC/STWAVE data exchanges and when they occur. Also contains simulation timing information.
- b. MF#### -- Directories produced by the CSTORM coupler (one for each STWAVE domain). Files contained in these directories:
  - 1) Fort.99 – run log for the coupler handling data between ADCIRC and the assigned STWAVE domain
  - 2) Adcstp.grd – ASCII file that contains the x- and y- locations of the ADCIRC mesh nodes in the local coordinate system used by STWAVE (e.g. StatePlane or UTM).
  - 3) Interp\_tables – ASCII file that contains the interpolation weights used for interpolating between ADCIRC and STWAVE
  - 4) Offgrid.dat – ASCII file that contains interpolation weights for interpolating STWAVE points not contained in the ADCIRC mesh
  - 5) Stwgeo.grd – ASCII file that contains the STWAVE cell center x-y- locations in geographic coordinates (deg longitude and latitude).
  - 6) Stwstp.grd – ASCII file that contains the STWAVE cell center x-y- locations in the local STWAVE coordinate system. Typically StatePlane or UTM with units of meters.

#### CSTORM Control Files:

- a. Mf\_config.in – ASCII file that contains the coupler information including the number of STWAVE grids, the number of computational processors to use, coordinate systems and timing for ADCIRC and STWAVE starts, exchanges, and completions.
- b. STWAVE Sim Control File(\*.sim) – ASCII STWAVE control file
- c. ADCIRC Control File (fort.15) – ASCII file that contains the ADCIRC simulation specific information

## Appendix G: CSTORM-Pvz Options

The user can get help on options arguments by typing “python naccs\_vizPlots\_3.py -h”.

- python naccs\_vizPlots\_3.0.py -h
- Usage: naccs\_vizPlots\_3.0.py [options] stormNumber1 stormNumber2 ...
- Options:
- -h, --help show this help message and exit
- -p PROJDIR, --project directory=PROJDIR  
full path of project directory
- -f FILETYPES, --files=FILETYPES  
-f maxele.63, [default is ['maxele.63']]
- -d, --depth Flag to plot depth of surge
- -c SCENARIO, --scenario=SCENARIO  
scenario sub dir under project dir
- -o PLOTPTSFILE, --plot optsf=PLOTPTSFILE  
plot options full path and filename
- -g ADCIRCGRID, --grid=ADCIRCGRID  
Adcirc fort.14 grid filename in vtk format
- -m EMAILADDR, --mail=EMAILADDR  
email address
- -q QUEUE, --queue=QUEUE  
queue name
- -A ALLOCATION, --allocation=ALLOCATION  
allocation code
- -u FEETMETERS, --units=FEETMETERS  
units of results -> enter 'feet' or meters
- -r, --runCheck Flag to check if run successful completion
- -z, --compress Flag to submit compress\_clean pbs script after viz  
completion
- -s CSCRIPT, --script=CSCRIPT  
name of compress\_clean pbs script to submit
- -w, --waves Flag to plot wave files set in options.viz file
- -a, --allwaves Flag to NOT plot all wave files overlay